

# User Manual

- V1306

# Table of Contents

---

<b>SAFETY PRECAUTION / MEASURES .....</b>	<b>4</b>
<b>PHONE LAYOUT .....</b>	<b>5</b>
<b>1 GETTING STARTED .....</b>	<b>7</b>
1.1 BATTERY .....	7
1.1.1 <i>Removing and installing battery</i> .....	7
1.1.2 <i>Charging</i> .....	8
1.2 CONNECTING TO A NETWORK .....	9
1.2.1 <i>SIM card</i> .....	9
1.2.2 <i>Inserting and removing SIM card</i> .....	9
1.2.3 <i>Inserting and removing memory card</i> .....	9
1.2.4 <i>Power on/off phone</i> .....	11
1.2.5 <i>Unlocking SIM card</i> .....	11
1.2.6 <i>Unlocking phone</i> .....	11
1.2.7 <i>Connecting to network</i> .....	11
<b>2 BASIC FUNCTION .....</b>	<b>12</b>
2.1 MAKING A CALL .....	12
2.1.1 <i>Making domestic calls</i> .....	12
2.1.2 <i>Dialing extension number of fixed-line telephone</i> .....	12
2.1.3 <i>Dialing international calls</i> .....	12
2.1.4 <i>Dialing phone numbers in the call records</i> .....	12
2.2 EMERGENCY CALLS .....	13
2.3 ANSWERING A CALL .....	13
2.4 CALL RECORDS .....	13
2.5 CALL OPTIONS .....	13
2.6 INPUT METHOD .....	14
2.6.1 <i>Key board</i> .....	14
2.6.2 <i>Navigation keys (up/down and left/right keys)</i> .....	14
2.6.3 <i>Pound key</i> .....	14
2.6.4 <i>Number keys</i> .....	14
2.6.5 <i>Asterisk key</i> .....	14
2.6.6 <i>Communication control keys</i> .....	15
2.6.7 <i>Connection jack</i> .....	15
<b>3 PHONEBOOK .....</b>	<b>16</b>
3.1 SEARCH .....	16
3.2 ADD NEW .....	16
3.3 CALLER GROUPS .....	16
3.4 EXTRA NUMBERS .....	17
3.5 SPEED DIAL .....	17
3.6 COPY ALL .....	17
3.7 DELETE .....	17
3.8 IMPORT/EXPORT .....	17
3.9 SETTINGS .....	17
3.9.1 <i>Memory status</i> .....	17
3.9.2 <i>Preferred storage</i> .....	17
3.9.3 <i>Fields</i> .....	17
3.9.4 <i>My vCard</i> .....	17
3.9.5 <i>VCard version</i> .....	18

<b>4</b>	<b>MESSAGES</b>	<b>19</b>
4.1	SMS	19
4.1.1	Write Message	19
4.1.2	Inbox	19
4.1.3	Outbox	20
4.1.4	Drafts	20
4.1.5	Templates	20
4.1.6	SMS settings	20
4.1.7	Signature Settings	21
4.2	MMS	21
4.2.1	Write message	21
4.2.2	Inbox	21
4.2.3	Outbox	22
4.2.4	Drafts	22
4.2.5	Templates	22
4.2.6	MMS settings	22
4.3	CHAT	22
4.4	VOICE MAIL SERVER	22
4.5	BROADCAST MESSAGE	23
4.6	SCHEDULE SMS	23
<b>5</b>	<b>HISTORY</b>	<b>24</b>
5.1	SIM1 HISTORY	24
5.1.1	SIM1 missed calls	24
5.1.2	SIM1 dialled calls	24
5.1.3	SIM1 received calls	24
5.1.4	Delete SIM1 call logs	24
5.1.5	SIM1 call timer	24
5.1.6	SIM1 call cost	24
5.1.7	SIM1 SMS counter	24
5.1.8	SIM1 GPRS counter	24
5.2	SIM2 HISTORY	24
<b>6</b>	<b>FILE MANAGER</b>	<b>25</b>
<b>7</b>	<b>MULTIMEDIA</b>	<b>26</b>
7.1	AUDIO PLAYER	26
7.2	FM RADIO	26
7.3	SOUND RECORDER	26
7.4	IMAGE VIEWER	27
<b>8</b>	<b>GAMES</b>	<b>28</b>
<b>9</b>	<b>SERVICES</b>	<b>29</b>
9.1	SIM APPLICATOR / STK	29
9.2	WAP	29
9.3	DATA ACCOUNT	29
<b>10</b>	<b>ORGANIZER</b>	<b>30</b>
10.1	CALENDAR	30
10.2	TO DO LIST	30
10.3	ALARM	30
10.4	CALCULATOR	30
10.5	UNIT CONVERTER	30
10.6	CURRENCY CONVERTER	31
10.7	WORLD CLOCK	31
10.8	EBOOK READER	31

<b>11</b>	<b>SETTINGS.....</b>	<b>32</b>
11.1	DUAL SIM SETTINGS.....	32
11.2	USER PROFILES.....	32
11.3	PHONE SETUP.....	32
11.4	CALL SETUP.....	33
11.4.1	<i>SIM1 call setting.....</i>	<i>33</i>
11.4.1.1	<i>Caller ID.....</i>	<i>33</i>
11.4.1.2	<i>Call waiting.....</i>	<i>33</i>
11.4.1.2.1	<i>Activate.....</i>	<i>33</i>
11.4.1.2.2	<i>Deactivate.....</i>	<i>33</i>
11.4.1.2.3	<i>Query Status.....</i>	<i>33</i>
11.4.1.3	<i>Call divert.....</i>	<i>33</i>
11.4.1.4	<i>Call barring.....</i>	<i>33</i>
11.4.1.5	<i>Line switching.....</i>	<i>33</i>
11.4.2	<i>SIM2 call setting.....</i>	<i>33</i>
11.4.3	<i>Auto Redial.....</i>	<i>33</i>
11.4.4	<i>Call time display.....</i>	<i>33</i>
11.4.5	<i>Call time reminder.....</i>	<i>34</i>
11.4.6	<i>Auto Disconnect.....</i>	<i>34</i>
11.4.7	<i>Change Voice.....</i>	<i>34</i>
11.4.8	<i>Low Battery protect.....</i>	<i>34</i>
11.4.9	<i>Background sound.....</i>	<i>34</i>
11.4.10	<i>SMS Responson.....</i>	<i>34</i>
11.5	NETWORK SETUP.....	34
11.5.1	<i>SIM1 network setup.....</i>	<i>34</i>
11.5.1.1	<i>Network selection.....</i>	<i>34</i>
11.5.1.2	<i>Preferences.....</i>	<i>34</i>
11.5.2	<i>SIM2 network setup.....</i>	<i>34</i>
11.6	SECURITY SETUP.....	35
11.6.1	<i>SIM1 security setup.....</i>	<i>35</i>
11.6.1.1	<i>SIM1 lock.....</i>	<i>35</i>
11.6.1.2	<i>Fixed dial.....</i>	<i>35</i>
11.6.1.3	<i>Barred dial.....</i>	<i>35</i>
11.6.1.4	<i>Change password.....</i>	<i>35</i>
11.6.2	<i>SIM2 security setup.....</i>	<i>35</i>
11.6.3	<i>Phone lock.....</i>	<i>35</i>
11.6.4	<i>Private Protection.....</i>	<i>35</i>
11.6.5	<i>Auto keypad lock.....</i>	<i>35</i>
11.6.6	<i>Change password.....</i>	<i>35</i>
11.6.7	<i>Firewall Setting.....</i>	<i>36</i>
11.6.7.1	<i>Black List.....</i>	<i>36</i>
11.6.7.2	<i>Group Setting.....</i>	<i>36</i>
11.6.8	<i>Tracker.....</i>	<i>36</i>
11.6.8.1	<i>Status.....</i>	<i>36</i>
11.6.8.2	<i>Setting.....</i>	<i>36</i>
11.7	RESTORE FACTORY SETTINGS.....	36
<b>12</b>	<b>DISCLAIMER.....</b>	<b>37</b>
	<b>APPENDIX I TROUBLESHOOTING.....</b>	<b>38</b>
	<b>APPENDIX II ABBREVIATIONS AND EXPLANATION.....</b>	<b>41</b>

## Safety Precaution / Measures

Please comply with these precautions / measures to avoid dangerous or illegal situation and ensure peak performance of your phone.



### ***ROAD SAFETY COMES FIRST***

Do not use the phone hand-held while driving. Park the vehicle on the road side, if phone is hand-held.



### ***SWITCH OFF IN AIRCRAFT***

Switch your phone off while boarding an aircraft. Signal from your phone can affect aircraft system. You are legally obliged to comply with this recommendation.



### ***SWITCH OFF NEAR EXPLOSIVE***

Switch your phone off when entering any explosive area. Observe any provided guidelines or regulations.



### ***SWITCH OFF WHEN REFUELING***

Do not use your phone when refueling. You should keep your phone away from fuel and chemicals.




### ***SWITCH OFF IN HOSPITALS***

Switch the phone off in hospitals. Follow any instructions if provided.



### ***ENHANCEMENTS AND BATTERIES***

Use only approved enhancements and batteries. Do not connect incompatible products.



### ***AVOID INTERFERENCE WITH PACEMAKERS***



Maintain a minimum of 15cm between mobile phones and pacemakers to avoid potential interference.




### ***USE QUALIFIED SERVICING***

You may only open the phone to replace the battery, SIM and microSD card. You must not open the battery under any circumstances. All other changes to this device are strictly prohibited and will invalidate the guarantee.

# Phone Layout

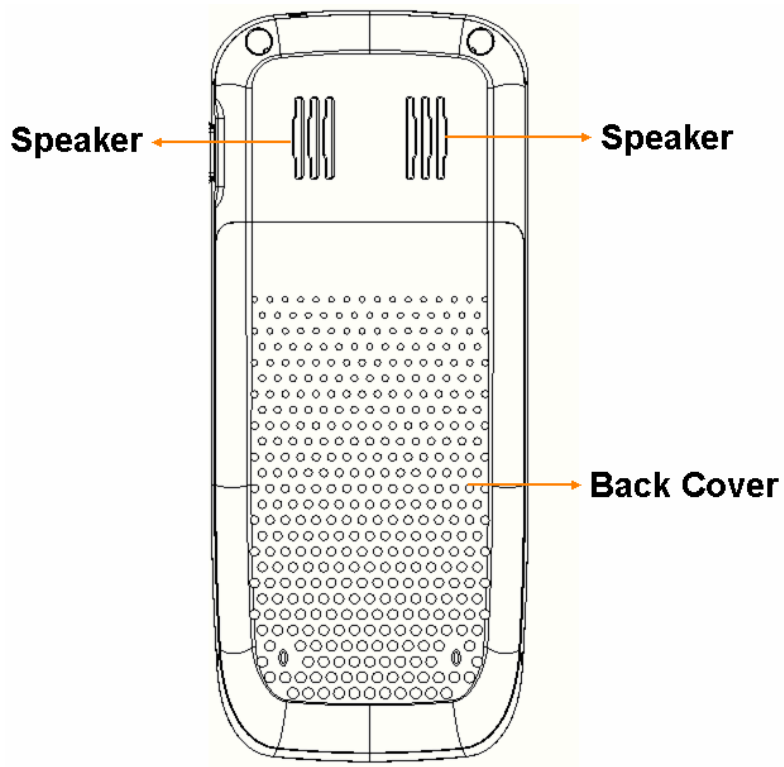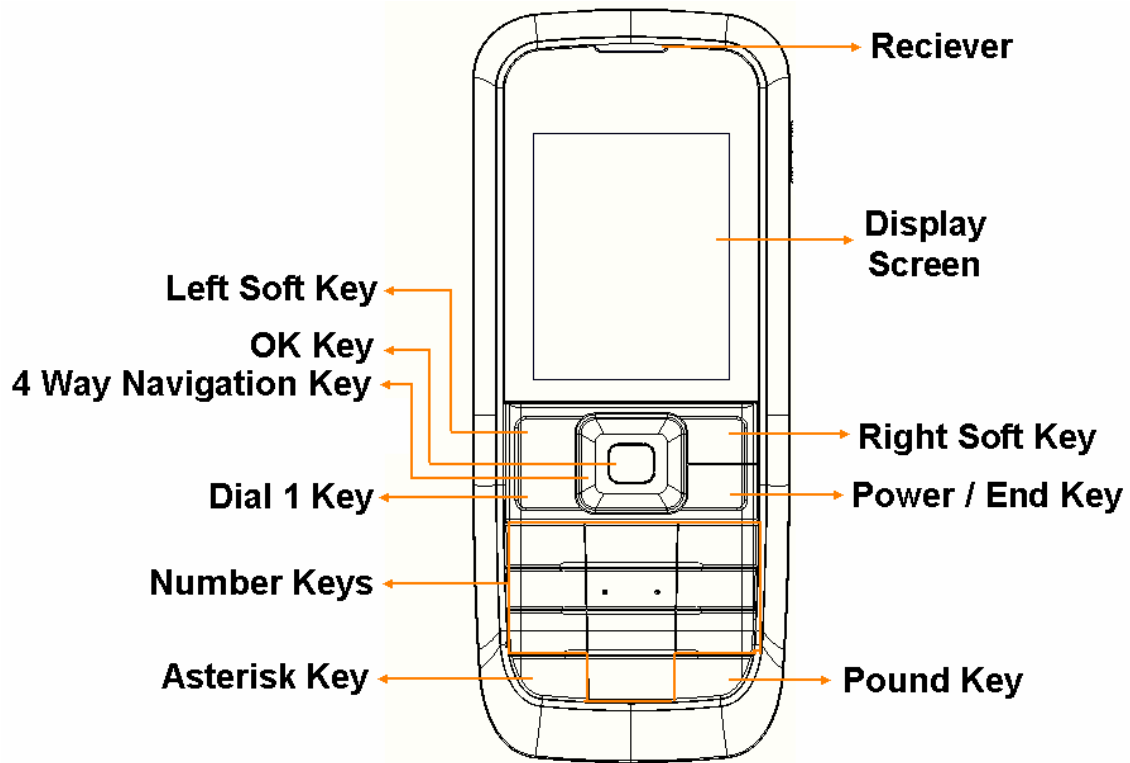

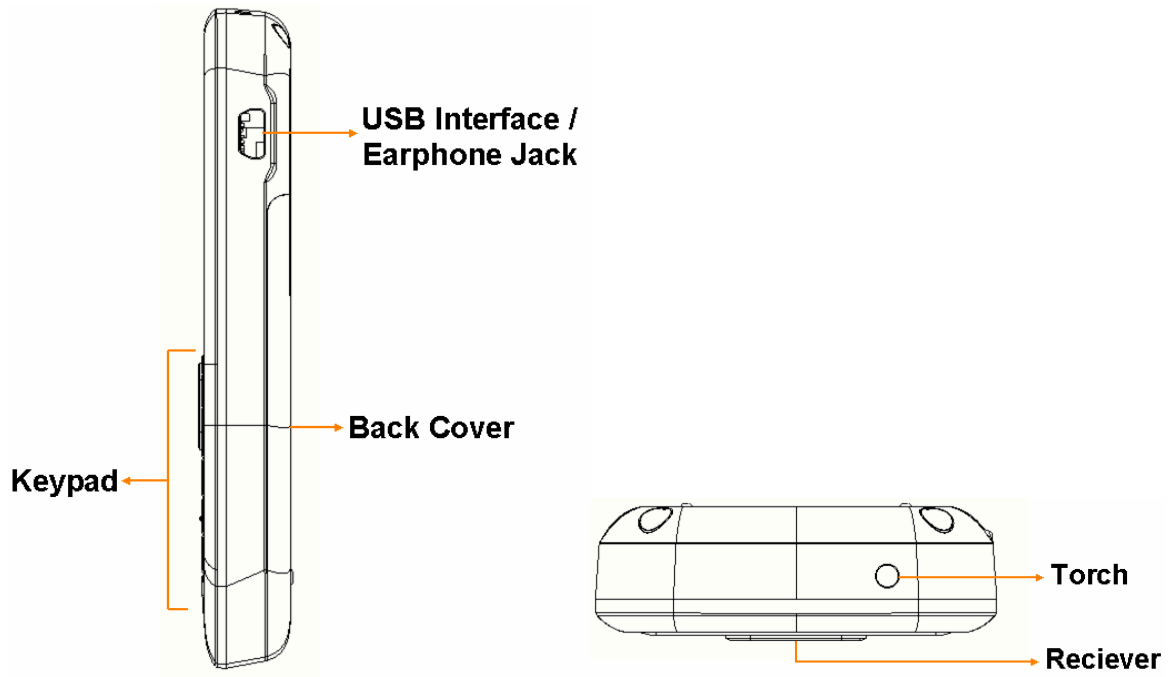


# 1 Getting Started

## 1.1 Battery



The battery at its initial condition is charged to 50% full, and can be used after unwrapping. For the first three times of charging, do not recharge until the battery is totally exhausted, so that the battery can reach its best usage performance.

### 1.1.1 Removing and installing battery

1. When removing the battery, follow the steps:
  - i. Press the battery back cover to unlock and slide it downwards to open the back cover.
  - ii. Locate the battery groove at the bottom middle and lift the battery up as indicated by the arrow.
  - iii. Remove the battery out from the phone.

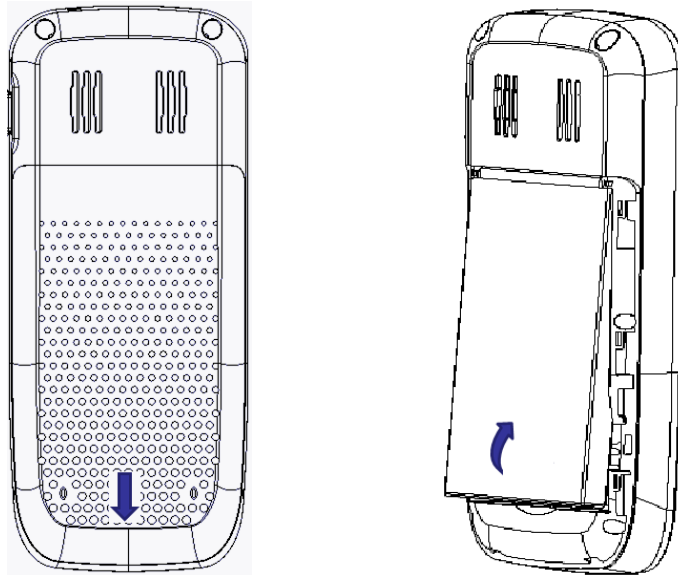

2. When installing the battery, follow the steps:
  - i. Slide the battery into the compartment in such a way that the metal connectors of the battery are aligned with the metal connectors of the phone.
  - ii. Push the battery down into the compartment.
  - iii. Place the back cover of the battery onto the phone squarely, and push in upward direction to engage the locks.

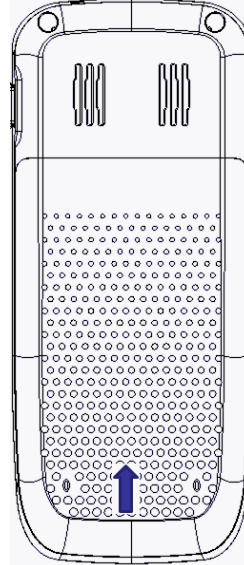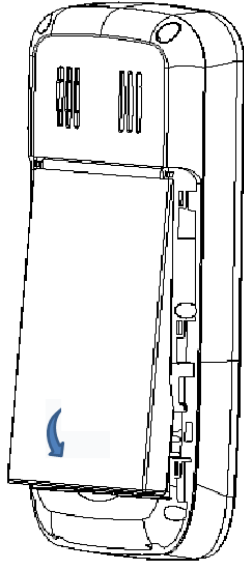

	Make sure to power off the phone before taking out SIM card, otherwise your SIM card might be damaged.
Warning:	

### 1.1.2 Charging

While charging, the power supply indicator at phone's screen icon zone will flash in a rotation manner, if the phone is off while charging, a charging animation will still appear, indicating that the phone is charging. If the phone is still being overused while the power supply is insufficient, the charging animation will appear on the screen after the charging has started for a while.

When the power supply indicator at the screen's icon zone shows full and stops flashing, it means charging has completed. If it takes place when the phone is off, the screen will display charging-finished icon. The process generally takes about 2.5 hours. It is normal that the battery, the phone and the charger will become hot during the charging process.

After the charging of the battery is complete, disconnect the phone and the charger from the AC power supply.

	<ol style="list-style-type: none"><li>1. Battery must be charged in a well ventilated place with surrounding temperature at <math>-10^{\circ}\text{C}\sim+55^{\circ}\text{C}</math>, and it is imperative that a charger provided by manufacturer is used. Using unauthorized charger might cause danger, which also violates warranty terms prescribed by the manufacturer. If the charging temperature is too high or too low, the phone will automatically give warning and stop charging, so as to prevent damages to battery.</li><li>2. Using the phone while charging may extend the charging time.</li><li>3. If battery gets fully discharged, the phone will automatically get switched off.</li></ol>
Note:	


## 1.2 Connecting to a Network

### 1.2.1 SIM card

A valid SIM (Subscriber Identity Module) card must be inserted in the phone before using it. All information related to making connection to the network are recorded in the chips of SIM card, including the names, phone numbers and short messages you have stored in the SIM card. In order to prevent loss or damage of the information in the SIM card, it is necessary to avoid touching metal contact surface, and keep SIM card far from electric current and magnetic field.

### 1.2.2 Inserting and removing SIM card

1. When inserting SIM card, follow the steps:
  - i. Remove all the external power connection and power off the phone.
  - ii. Remove back cover and the battery.
  - iii. Slide the SIM cards into SIM card socket (as shown in the image).

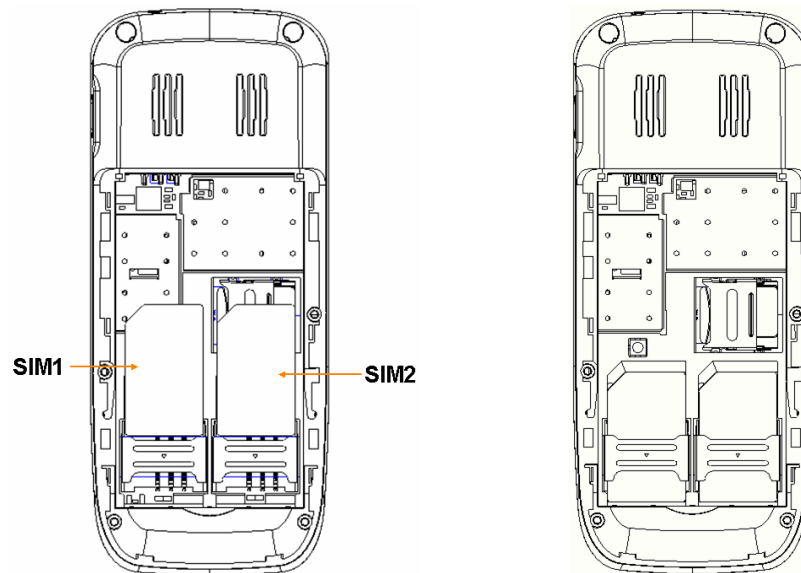


2. When removing SIM card, follow the steps:
  - i. Remove all the external power connection and power off the phone.
  - ii. Remove back cover and the battery.
  - iii. Slide out the SIM cards from the SIM card sockets.

### 1.2.3 Inserting and removing memory card


1. When inserting memory card, follow the steps:
  - i. Remove all the external power connection and power off the phone.
  - ii. Remove back cover and the battery.
  - iii. Push the memory card cover in the direction indicated by the arrow to unlock and pull it upwards to open (as shown in the figure).

- iv. Place the memory card into memory card slot with the metal connectors of the memory card facing down.
- v. Close the memory card cover and push it in the direction indicated by arrow to lock the memory card cover.

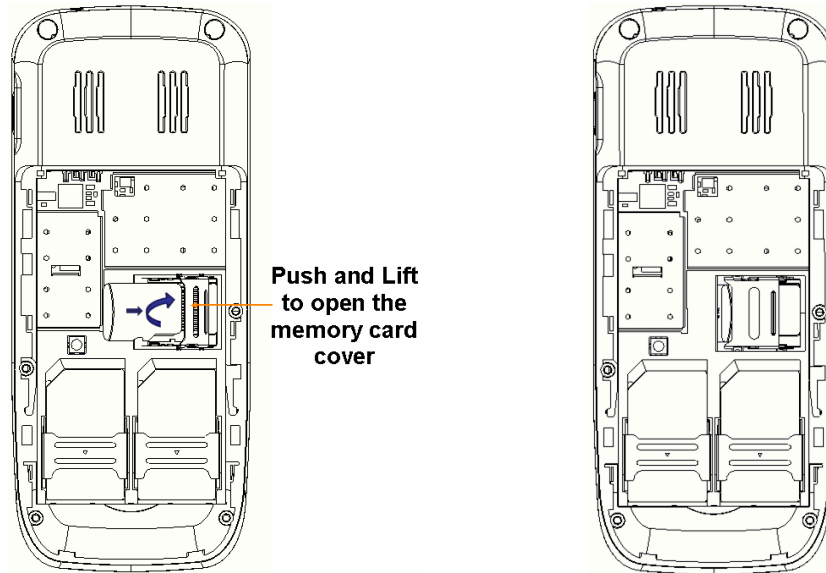

2. When removing memory card, follow the steps:

- i. Remove all the external power connection and power off the phone.
- ii. Remove back cover and the battery.
- iii. Unlock and open the memory card cover.
- iv. Remove the memory card and close and lock the memory card cover.

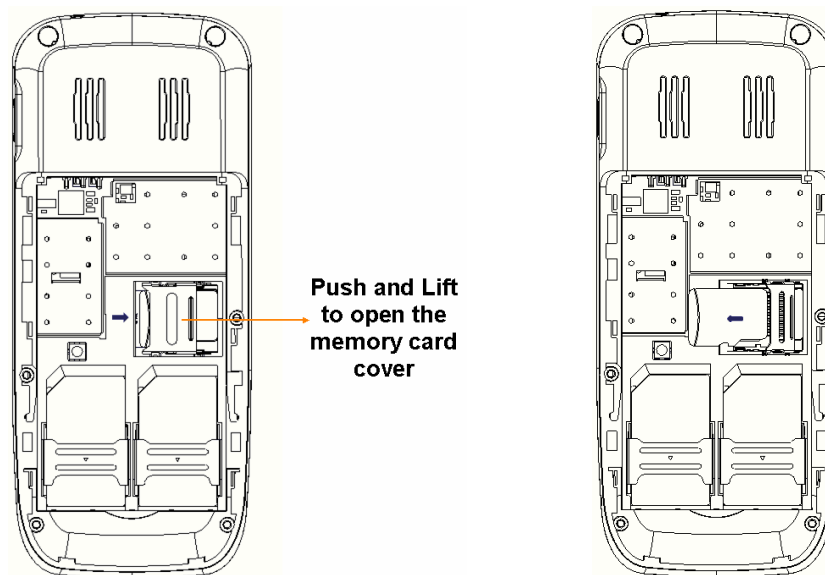

## 1.2.4 Power on/off phone

Press and hold the Power/End Key for 3-5 seconds to Power ON. On getting ON the backlight brightens and animation is displayed.

If Phone asks for a PIN code, enter the PIN Code and press "OK".


The Lock code for the phone in factory setting is 0000.

Press and hold the Power/End Key for 3-5 seconds to Power OFF.

## 1.2.5 Unlocking SIM card

To prevent illegal usage, PIN (Personal Identification Number) code is adopted to encrypt for protection of your SIM card. Selecting this option and if having set up PIN code protection, you have to enter PIN code each time you start it, unlocking SIM card to use the mobile phone. Users can erase SIM card password; however, in this case SIM card cannot prevent illegal usage.

1. Press and hold the Ring off key to power on the phone.
2. Enter PIN1 code, use right function key to delete input-errors, left function key for "OK". For instance, if PIN1 setting is 1234, then enter the following input: 1 2 3 4 "OK".
3. If there are three consecutive input errors, your SIM card will be locked up by the network, the phone will inquire PUK1 code.

 <p>Note:</p>	<p>Your service provider will set up a standard PIN (4 to 8 digits) number for your SIM card; you should change it into your private password as soon as possible.</p>
---	--

## 1.2.6 Unlocking phone

To prevent phone from being illegally used, you can set up mobile phone lock password for protection. Selecting this option, you must input mobile phone lock password to unlocking it and make it normal. Users can power off mobile phone lock, but illegal usage cannot be prevented for mobile phone in this case.

- Pressing the Ring off key continuously to start up mobile phone.
- Input mobile phone lock Password, right function key to delete input-errors, left function key for "OK".

For instance, if mobile phone Password is set up as 0000, then input the following: 0 0 0 0 "OK". If you forget mobile phone Password, you have to contact local authorized repair center, so as to unlock your mobile phone's Password.

## 1.2.7 Connecting to network

After SIM card is successfully unlocked, the phone will automatically search available network (with searching showing on the screen). Once the connection is made, the name of the service provider will be displayed on the top central part of the text and graphic area. At this time your phone has been connected to the service network.

## 2 Basic Function

### 2.1 Making a Call

When the logo of service provider appears on the display screen, you can dial or receive calls. The information bar at the upper left corner of the display screen shows network signal strength (when there are 5 information bars the signal is strongest).

The call quality is very likely to be affected by obstructions; therefore movement in a small area can effectively improve call performance.

#### 2.1.1 Making domestic calls

Enter phone number, and then press Dial Key to make the call. If the user needs to change phone number, press right soft key to delete the numbers. Call state information will be shown on the screen after the called party ends the call. To enter and dial domestic call, follow the order:

1. Area code
2. Phone number
3. Dial

#### 2.1.2 Dialing extension number of fixed-line telephone

Some extension numbers of fixed-line telephone cannot be connected directly, you must dial the powerboard phone number, then press \* key to power continually, until the screen displays "P", then dial extension number.

You can dial extension numbers of fixed-line telephone in the following order:

1. Area code
2. Powerboard number
3. P extension number
4. Dial key

#### 2.1.3 Dialing international calls

To make an international call, you may press \* key to power continually, till the screen displays the pre-digit symbol "+" for international long distance call, which will enable you to make a call from any country without knowing the local international access code. You can enter numbers in the following sequence to make an international call:

1. The pre-digit symbol, +
2. Country code
3. Complete phone number
4. Dial Key.

#### 2.1.4 Dialing phone numbers in the call records

Every phone number you have dialled or received will be stored in the list of phone call records. The latest dialled, received and missed numbers will be listed, according to their types, in the respective menu of dialled calls, received calls and missed calls. When call record list is full, the old numbers will be automatically deleted. To view the list, do the following:

1. In standby state press Dial 1/2 key to view the record for dialled calls.
2. All phone numbers in the list can be dialled directly by pressing the Dial key.
3. When the list is displayed, press "OK" to read the details, then "options" to Save or Delete the number.

## 2.2 Emergency Calls

As long as in the network service range (which can be confirmed by checking the signal strength bars on the top left corner of the screen), you can always call emergency service. If your network supplier does not provide roaming service in your area, the screen will display "Emergency", to inform you that only emergency call is permitted. If you are within the network service range, you can also make emergency calls even without the SIM card.

## 2.3 Answering a Call

To answer any incoming call, press dialing key or "answer" key. If an earphone has been connected, use the button on the earphone to answer a call, and if it is not convenient for you to press it, set automatic answer as on, assuring that the earphone is plugged on, so as to make calls automatically answered while the phone rings or vibrates. If Any Key answer function is chosen, pressing any key, other than Ring off key and right soft key, can answer an incoming call.

## 2.4 Call Records


Your phone can also store call records of the latest missed calls, received calls, dialled calls, the time of last call as well as total amount of received calls and total dialled calls for you.

## 2.5 Call Options

In connected state, press left soft key "Options" to enter call option, or press right soft key "H-free" to activate speaker. Under activated-hands free condition, press right soft key "H-hold" to power off speaker. Operation methods of call options are the same as that of Function menu.




This call options can only be viewed during call process, moreover, the functions of call waiting, call holding, and conference calls need service support. Please contact your service provider for more details. In call options, you can perform the following operations:

- **Hold Single call:** Put the current call on hold.
- **End Single call:** End the current call.
- **New Call:** Enter new dialing interface.
- **Phonebook:** Enter phone book menu.
- **Messages:** Enter short message menu. Owing to restrictions of network engagement, MMS function is barred during call process.
- **Sound recorder:** Record the current call.
- **Background Sound:** Setup the background sound for the current calling.
- **Change Voice:** Setup voice changer for current calling.
- **Mute:** Enables you to make your voice response mute.
- **DTMF:** Operations of DTMF powering on and off.
- **Conference\*:** Enter multiple party conference call state. By following the prompts, you can have the following functions: receive waiting calls, add them into multiple party call, maintain the multiple party call, talk privately with one party of the conference while maintaining all other callers, connect one party in the call conference with another party while exiting the multiple party call oneself, maintain one party of the multiple party call and end current call and all other maintained calls.

 <p>Note:</p>	<p>The menu marked * items will only appear in special circumstances. For conference function, it is necessary to apply for service supply to corresponding service operator.</p>
---	---

## 2.6 Input Method

This mobile phone provides the following input methods:

Input Method Icon	Explanation
	Upper case English input method.
	Lower case English input method.
	Digit input method.

### 2.6.1 Key board

In idle screen, press the left soft key to directly access the **Menu**. In idle screen, press the right soft key to directly access the **Phonebook** list. During menu operation, the current functions of the left and right soft keys are shown in the bottom line of the screen, and they are closely related to the current status of the phone.

### 2.6.2 Navigation keys (up/down and left/right keys)

Direction keys are used to readily access different functions which can be assigned by dedicating the keys by **Dedicated Keys** option in **Settings**.

### 2.6.3 Pound key

Press the pound key to enter "#".

Press and hold the pound key in idle screen to activate/deactivate the Silent mode.

When in an editing screen, press the pound key to change the input method.

### 2.6.4 Number keys

Press number keys (0-9) to enter numbers.

Press and hold number keys (2-9) to start speed dial.

You can also use number keys to select menus. If a number is shown before an option in menu list, you can select the option quickly by pressing the corresponding number key.

### 2.6.5 Asterisk key

Press the asterisk key to enter "\*".

Press the asterisk key twice in a row to enter "+", to make an international call.

## 2.6.6 Communication control keys









Calling key is used to make a call after a number has been entered or selected from the phone book, or to answer an incoming call.

Ending key is used to end a call during calling or conversation, or to quit the menu and return to idle screen. Press and hold the ending key for about five seconds to turn on/off the phone.

## 2.6.7 Connection jack

The connection jack is used to connect charger and headset.

The following icons may be displayed in the first line of the screen.

	Signal strength for SIM1
	Signal strength for SIM2
	Battery status
	Keypad locked
	Alarm activated
	Connected to the GPRS network
	Ring
	Vibration only

## 3 Phonebook

You can store information such as names, phone numbers, and email address in phonebook. Phone numbers can be stored in your mobile phone or SIM card. The mobile phone can store up to 1000 records, the amount of phone numbers that SIM card can store vary with its capacity. In standby state, you can access this interface with the help of right soft key.

### 3.1 Search

Search allows you to search an entry in the Phonebook by entering the key letters or words of the name.

You can fast locate the number of the person you want to contact. Enter the initial letter of the person's name, and related records about it will display on the screen. Please use the Up / Down key to select the number as desired, and then press Dial Key to make a call.

### 3.2 Add New

You can add a new contact entry to the Phone Book, for the SIM1, SIM2 and phone memory.

On selecting **SIM1** and **SIM2** to save the phone number, you get the following fields to edit:


- **Name**
- **Number**

On selecting **Phone memory** to save the phone number, you get the following fields to edit:

- **Name**
- **Number**
- **Home Number**
- **Company name**
- **Email address**
- **Office number**
- **Fax number**
- **Birthday**
- **Caller picture**
- **Caller ringtone**
- **Caller group**

### 3.3 Caller Groups

This mobile phone supports incoming call group function, you can select groups, view and edit group details under incoming call group list interface.

 <p>Note:</p>	<p>Member addition or reduction of incoming groups is only limited to phone record on the mobile phone.</p>
--	---

### 3.4 Extra numbers

This feature enables to enter **SOS Number** for SIM1 and SIM2.

### 3.5 Speed dial

This feature enables you set the speed dial status and assign number keys from 2-9 to phonebook numbers to quickly dial the number.

### 3.6 Copy all

This function enables you to copy all entries both from the SIM card to Phone / Other SIM and vice versa.

### 3.7 Delete

You can delete entries from the SIM card and Phone.

To delete from SIM card or Phone select "**From SIM1**", "**From SIM2**" (if both are inserted in the phone) and "**From Phone**" respectively to delete entries.

You can select "**One by One**" to delete entries by selecting the particular phone number.

### 3.8 Import/Export

This function enables you to import/export the messages to phone/memory card.

### 3.9 Settings


This function enables you to check memory status and preferred storage location.

#### 3.9.1 Memory status

It is the default storage location of the phone number. You can also select different storage location when saving a phone number.

#### 3.9.2 Preferred storage

It enables to select your preferred storage location "SIM Memory" or "Phone Memory".

 <p>Note:</p>	<p>If either of your storage location is already full, the phone will automatically save your message to the alternate location</p>
--	---

#### 3.9.3 Fields

It enables to setup vCard details, such as Home number, Company name, Email address etc.

#### 3.9.4 My vCard

You can create your own card via vCard method. The options available are:

**Edit my vCard:** Enables to edit the vCard by entering the following fields

- Name

- Number
- Home number
- Company name
- Email address
- Office number
- Fax number

**Send my vCard:** Enable to send your vCard.

### **3.9.5 VCard version**

This function enables you to set the version of your vCard.

## 4 Messages

### 4.1 SMS

The phone supports Short Message Service (SMS), and picture, animation, melody, and sound can be added in the Short message. Short message can also be created by using templates.

#### 4.1.1 Write Message

You can create and send message by this option.

Select **Menu > Messages > SMS > Write Message**, to create new message, SMS editor screen appears. You can write a message maximum of 612 characters. It also displays the length indicator counting backwards from 160 to 0 but it varies from page as you can write a 4 page message.

Selecting **Option** provide following sub-options to perform:

**SIM1 done:** This option provides you with various options to send the message using SIM1.

**SIM2 done:** This option provides you with various options to send the message using SIM2.

**Use templates:** It provides option to insert the templates available in the phone.

**Insert object:** It provides option to insert object such as Picture, Animation, Melody and Sound from their respective folders.

**Text format:** It enables you to define Text style, Alignment and New paragraph.

**Insert Contact Information:** Enables to insert the name in the message from the phonebook.

**Insert bookmark:** Enables to insert any bookmark in the message.

**Input Method:** It enables to select the method how you want to edit the message.

#### 4.1.2 Inbox

All received messages are saved in the inbox; you can edit or forward these messages and so on.

Select **SMS > Inbox**; for SIM1 and SIM2 messages respectively you have to select the SIM by navigation key. On selecting the message, press **Option** to display the following options:

**Reply:** Enables to reply to the sender of the message.

**View:** Enables to view the current message.

**Chat:** Enables to chat with the sender of the current message.

**Select Delete:** Enables to delete the current message.

**Delete all:** Enables to delete all the messages.

**Copy all:** Enables to copy all the messages.

**Move all:** Enables to move all the messages.

**Select export:** Enables to export the current message to phone/SIM.

**SMS select hidden:** Enables you to hide the selected message.

To unhide the message go to idle screen and then type \*123456#. On entering, this phone displays following option:

- **Display hidden SMS:** Enables you to display the hidden SMS.

- **SMS number Hidden:** Enables you to add the phone numbers from which message are to be made hidden.

**Sort:** Enables you to sort the messages according to date received or according to name.

### 4.1.3 Outbox

This folder contains the saved messages which are successfully sent to the destination. On selecting outbox, press **Option** to display the following options:

**Write message:** Enables you to write a new message.

**View:** Enables you to view the current message.

**Select Delete:** Enables to delete the current message.

**Delete all:** Enables to delete all the messages from outbox.

**Copy all:** Enables to copy all the messages from SIM/Phone to phone/SIM.

**Move all:** Enables to move all the messages from SIM/Phone to phone/SIM.

**Select export:** Enables to export the messages to phone/SIM.

### 4.1.4 Drafts

This folder contains the saved messages, which have to be sent later. On selecting draft, press **Option** to display the following options:

**Send from SIM1:** Enables to forward the message using SIM1.

**Send from SIM2:** Enables to forward the message using SIM2.

**Edit:** Enables to edit and forward the current message.

**Delete:** Enables to delete the current message.

**Copy to phone / SIM:** Enables to copy the message to SIM/Phone.

**Move to phone / SIM:** Enables to move the message to SIM/Phone.

**Select export:** Enables to export the current message to phone/memory card.

**Copy all:** Enables to copy all the messages from SIM/Phone to phone/SIM.

**Move all:** Enables to move all the messages from SIM/Phone to phone/SIM.

**Use number:** Enable to extract the number from the message and then provides option to dial or save the number to phone book.

**Use URL:** Enable to extract/use the URL address from the message.

### 4.1.5 Templates

Your phone contains 10 SMS which can be used commonly in your messages. You can edit or erase them.

### 4.1.6 SMS settings

SMS settings help in to edit the settings for the text messages. It provides following option:

#### **SIM1 message settings**

##### **Profile Settings**

Enables to select the profile you have configured in your mobile phone.

### Common settings


- **Delivery report:** Enables to get the delivery notification by making the status ON /OFF.
- **Reply path:** Enables to make out reply path by making the feature ON / OFF.

### Memory status

It enables to check SIM and Phone memory status.

### Preferred Storage

It enables to select your preferred storage location “SIM Memory” or “Phone Memory”.

 <p>Note:</p>	<p>If either of your storage location is already full, the phone will automatically save your message to the corresponding location</p>
--	---

**SIM2 message settings:** Please refer to the content in “**SIM1 message settings**”.

## 4.1.7 Signature Settings

Enables you to set the status of the signature Append/No Append and edit the message signature.

## 4.2 MMS

MMS stands for Multimedia Message Service, whose largest feature is its support for multimedia function, capable of transmitting multimedia format information such as texts, images and voice.

MMS service needs service provider support, before use. Please confirm whether your SIM card supports this service or consult relevant service provider. If your phone supports MMS function, you need to make some necessary MMS setup before you can receive and send multimedia information.

### 4.2.1 Write message

You can create multimedia messages by this option. You can edit all the fields with the help of left soft key. The fields which can be inserted are:

**To:** Enables to insert the main recipient number.

**Cc:** Enables to enter carbon copy recipient.

**Bcc:** Enables to enter blind carbon copy recipient.

**Subject:** Enables to enter and edit subject.

**Edit content:** Enables to edit content.

### 4.2.2 Inbox

This folder contains the multimedia message received from other users.

### 4.2.3 Outbox

This folder contains the saved messages which are successfully sent to the destination.

### 4.2.4 Drafts

This folder is a temporary storage place for MMS that are waiting to be sent.

### 4.2.5 Templates

Your phone contains a default template of multimedia messages.

### 4.2.6 MMS settings

MMS settings help in to edit the settings for multimedia messages. The different options are:

**Compose:** Enables to compose a multimedia message, including Creation mode, Picture resizing, Auto signature and Signature.

**Send:** Enables to set Validity period, Delivery report, Read report, Priority, Slide timing, Delivery time for sending multimedia messages.

**Retrieve:** Enables to set Home network, Roaming, Read report and Delivery report for receiving multimedia messages.


**Filter:** Enables to set rejection of multimedia messages on some criteria:

Anonymous – Allow / Reject

Advertisement – Allow / Reject

**Server profile:** Enables to activate and edit the server profile. Please contact your service providers for settings.

**Memory Status:** Enables to view the memory usage ratio, used space and free space for multimedia message.

	<ol style="list-style-type: none"><li>1. Cases of delivery report and anonymous transmission are related to the service provided by your service provider, for more information contact your service provider.</li><li>2. Your phone has specially reserved certain available spaces for storing MMS. Saving a large amount of MMS might totally occupy this available storage capacity, therefore your phone might prompt your storage capacity is full. At this time you must first delete redundant information in all MMS mail directories, so as to ensure there is sufficient space for keep saving new MMS.</li></ol>
---	--

Note:

## 4.3 Chat

It is possible to set up two Chat rooms, to formulate "My Nickname" and "Destn. Number", in this way chatting through short message with the other party becomes possible.

## 4.4 Voice Mail Server

When you cannot connect and answer a call, you can request the caller to leave a message through Voicemail service; afterward, you can listen to messages by accessing Voicemail. Voice Mail Server is a network service to which you may need to subscribe. For more information, contact your service provider.

Select **Message > Voice Mail Server**, to access this option.

## 4.5 Broadcast Message

Broadcast Message enables you to receive messages on various topics, such as weather or traffic conditions from your service provider (network service). For available topics and relevant topic numbers, and more information contact your service provider.

The options available under this are:

**Receive mode:** Enables to make receiving mode ON / OFF.

**Read message:** Enables to read the messages received.

**Languages:** Enables to set out the preferred language.

**Channel settings:** Enables to set out the preferred channel.

## 4.6 Schedule SMS

Schedule SMS enables you to send the messages automatically at the desired date and time. To add a timing message, click left soft key, and the phone enables you to specify the details of the message. The various options that you can access are:

**Date:** Enables you to enter the date at which the message has to be dispatched.

**Time:** Enables you to set the time at which the message has to be dispatched.

**Phone Number:** Enables you to enter the phone number to which the message has to be delivered. You can also search a contact from the phonebook.

**Content:** Enables you to enter the contents of the message that you want to send.

**Sending Card:** Enables you to select the SIM card from which the message has to be delivered.

**Remind Methods:** Enables you to set the reminder, whether you want the message to be dispatched automatically or a popup tip should appear on the phone if the message is dispatched.

## 5 History

You can view SIM1/SIM2 information related to call records, including Missed Calls, Dialed Calls, Received Calls and Delete Call Log, Call Time, Call Cost, SMS Counter, GPRS Counter. If you have inserted only one SIM card, you can see only one of the SIM card phone records.

### 5.1 SIM1 history

#### 5.1.1 SIM1 missed calls

You can see the latest missed calls.

#### 5.1.2 SIM1 dialed calls

You can see the latest dialed calls.

#### 5.1.3 SIM1 received calls

You can see the latest received calls.

#### 5.1.4 Delete SIM1 call logs

Delete **Missed calls**, **Dialed calls**, **Received calls** and **Delete all** on the SIM1 card.

#### 5.1.5 SIM1 call timer

View **Last call**, **Dialed calls**, **Received calls** and **Reset all** of the SIM1 card.

#### 5.1.6 SIM1 call cost

View Last call cost and Total cost of the SIM1 card. You can also Reset cost and set the Maximum cost and the Price per unit of the SIM1 card. It requires network support.

#### 5.1.7 SIM1 SMS counter

View and reset the numbers of short messages sent and received on the SIM1 card.

#### 5.1.8 SIM1 GPRS counter

View the volume of GPRS last sent, last received, all sent and all received on the SIM1 card. You can also reset the counter on the SIM1 card.

### 5.2 SIM2 history

Please refer to the content in "**SIM1 history**".

## **6 File manager**

You can use File Manager to organize your files in folders in the phone and memory card.

If a memory card is inserted, the files stored on it are organized separately.

Select Phone or Memory card and select Options to browse, copy, delete, and move files in folders.

## 7 Multimedia

### 7.1 Audio player

Audio player allows you to play audio files. The phone supports T-Flash memory card. You need to save music files to **My Music** folder to play directly.

**Play:** Play the music files.

**Details:** Check the details of music files.

**Add to ringtones:** Add the music to ringtones.

**Refresh list:** update the play list.

**Settings:** Settings includes Auto Gen. List, List auto gen, Repeat, Shuffle, Background play and Sound effects.

### 7.2 FM Radio

You can use your phone to listen to FM radio stations once the original Headset is plugged into the accessories connector.

Select **Menu > Multimedia > FM Radio**, to access radio controls, it also provides following options:

**Channel list:** Enables check out the list off all the available channels.

**Manual input:** Enables to set the channel and receive the channel manually.

**Auto tuning:** Enables to search the channel automatically and reset the channel list.

**Settings:** Enables to set the settings for “Background Play”, “Loud Speaker”, “Record Format”, “Audio Quality” and “Record Storage”.

**Record:** Enables to record FM program while you are enjoying it. It can be processed by pressing OK Key.

**Append:** If there is any record, then you can append record after it.

**File List:** Enables to scroll over all of the records available in phone.

### 7.3 Sound recorder

You can use your phone to record sounds. It supports two kinds of recording formats: **AMR** and **WAV**. Select a format from settings in options. A call may also be recorded and saved to the phone or the memory card.

Select **Menu > Multimedia > FM Radio**, to access radio controls, it also provides following options:

**New record:** Enables to record a new sound.

**Play:** Enables to play the current recorded sound.

**Append:** Enables to append the current recorded sound.

**Rename:** Enables to rename the already saved sound.

**Delete:** Enables to delete the recorded sound.

**Settings:** Enables you to specify the storage location, file format and the audio quality.

**Use as:** Enables you to use the current recorded sound as ringtone in the current profile.

**Send:** Enables you to send the current recorded sound as MMS.

## 7.4 Image viewer

Image Viewer provides you with a quick view of the picture functions. You can view the pictures from the photos folder.

**View:** Enables you to view the captured images.

**Browse style:** You can view list style or matrix style.

**Use as:** Enables you to send the image to wallpaper and screen saver.

**Send:** Enables you to send the current image as MMS

**Rename:** Enables you to change the name of the image.

**Delete:** Enables you to delete the current image.

**Delete all files:** Enables you to delete all the images files stored in the image viewer folder.

**Sort by:** Enables you to sort the images in the Image Viewer by name, type, time and size.

**Storage:** Enables you to set the storage location for the image.

## 8 Games

Select **Menu > Games**, to access the game.

Game interface offers option to select a game, user can select the following game from the interface:

- **Copter**
- **Puzzle**
- **Panda**

On selecting, any of the particular game users receive following options:

**Start Game:** To start the game

**Game level:** Enable to configure the game level.

**Best Grades:** Enable to see best grades/score.

**Game Help:** Display the introduction how to play the game

Game interface also displays the Game settings option:

- **Game Settings**

You can configure your game settings such as background music and sound effect by this option.

## 9 Services

### 9.1 SIM applicator / STK

STK (SIM Tool Kit) is shown only if it is provided by your SIM card. For further details, please contact your network operator.

### 9.2 WAP

WAP function enables you to use the phone to surf the Internet.

**Homepage:** Enables to connect browser to a homepage you set.

**Bookmarks:** The phone displays a list of stored bookmarks. To add a page to bookmarks go to **Bookmarks > Options > Add bookmark**.

**Recent pages:** Displays the recent pages visited.

**Offline pages:** Displays the list of the pages which are offline and visited previously.

**Input address:** Enables to enter the Address to visit that particular page.

**Service inbox:** This folder stores all the messages from the operator and WAP functional messages.

**Settings:** Enables to set the browser settings, including Select SIM, Edit account, Browser options, Service message settings, Clear cache, Clear cookies and Trusted certificates.

### 9.3 Data account

This function enables to set the account information:

**GPRS:** Enables to specify Account name, APN, User name, Password, Auth. Type, Primary DNS and Secondary DNS.

## 10 Organizer

### 10.1 Calendar

You can use the phone's calendar to keep track of reminders, calls you need to make, meetings and birthdays. You can set the calendar to sound an alarm for your task.

Pressing the left soft key "Option" enables to View Tasks, Add task, Jump To Date and Go to weekly view.

**View tasks:** Enables to view tasks list and add tasks.

**Add task:** Use Navigation key for moving to the day you want and press Options to select Add task. You can select task type such as: Reminder / Meeting / Course / Date / Call / Anniversary.

**Jump to date:** Enables to input date to jump to date.

**Go to weekly view:** enables to go monthly view and weekly view respectively.

### 10.2 To Do List

You can use your phone to keep track of all your Reminder, Meeting, Course, Date, Call and Anniversary. It displays all schedules for today and the future days, under the option menu, it is possible to Browse, Add, Edit, Delete, and Delete All.

### 10.3 Alarm

You can set the device to sound an alarm at a desired time. The mobile phone can set up at most five alarms, and supports shutdown alarm.

Select **Menu > Organizer > Alarm**, to access alarm.


To set the Alarm, select the time and set the Options: On /Off, Time, Repeat Type, Snooze time and Alert type.

You can repeat the alarm **Once, Everyday** and **User Defined**.

### 10.4 Calculator

You can use your phone's calculator to add, subtract, multiply and divide.

1. Press the # key to enter decimal point.
2. Press the up, down, left and right key and OK key to select +, -, x, /, +, = respectively.
3. Press Clear to delete the figure.

 <p>Note:</p>	<p>This calculator is limited in accuracy, rounding off errors might occur.</p>
--	---

### 10.5 Unit Converter

You can make the units conversion for weight and length.

In the first entry field, select the format from which unit you want to convert and to which.

In the second entry field, enter the value to be converted.

After entering the value and pressing **OK**, automatically convert it into required value.

## 10.6 Currency Converter

You can use your phone for converting currency. You have to select the amount and currency rate to convert.

## 10.7 World Clock

You can scroll to browse every city's time zone in the world map. The related date and time will display at the bottom of the screen.

## 10.8 EBook reader

Your phone can be used to read the books by storing them \*.txt file\*. It supports view of UCS2, ASCII and UTF8 encoding documents.

Select **Menu > Organizer > E - Book Reader**, to access/read the books stored in your EBook folder.



Note:

To open a book, the encoding of the file should be appropriate.

# 11 Settings

## 11.1 Dual SIM settings

You can set the dual-mode mobile phone according following options:

- **Dual SIM open**
- **Only SIM1 open**
- **Only SIM2 open**
- **Flight mode**

## 11.2 User Profiles

You can select your own user profile for the phone.

Select **Menu > User Profile**, to access different profiles.

- **General**
- **Meeting**
- **Outdoor**
- **Indoor**
- **Headset**
- **Silent**

You can activate and customize them as per your need.

**Activate:** Enables to select the particular profile and activate it.

**Customize:** Enables to set Tone setup, Volume, Alert type, Ring type, Extra tone, and Answer mode.

## 11.3 Phone setup

Select **Menu > Settings > Phone Setup**, to get access to these options:

**Time and Date:** Enables to set time and date by setting home city, time/date, and format.

**Schedule power on / off:** Enables to set the time for auto power on / off.

**Language:** Enables to select the desired language for the display text.

**Prefer. input methods:** Enables to select the desired input method for the default input method.

**Display setup:** Enable to set display characters such as Wallpaper, Screen saver, Date and time and the operator name.

**Greeting text:** Enable to edit and enter the words, as your greeting text once you switch on the phone.

**Shortcuts:** Enables to set the shortcuts for the function you often used.

**Dedicated key:** Enables to configure shortcut functions for the up, down, left, and right key respectively.

**LCD backlight:** Enable to set the LCD backlight.

## **11.4 Call setup**

### **11.4.1 SIM1 call setting**

#### **11.4.1.1 Caller ID**

This option enables you to set your caller ID by network, hide your caller ID or send caller ID. You can hide your caller ID only if it is supported by your network provider.

#### **11.4.1.2 Call waiting**

This option enables you to Activate / Deactivate call diversion and check the query status.

##### **11.4.1.2.1 Activate**

If activated, an incoming call is signaled by a call waiting tone when you are on another call. The number/name of the incoming call is displayed simultaneously.

##### **11.4.1.2.2 Deactivate**

Enables to cancel all the call waiting functions.

##### **11.4.1.2.3 Query Status**

Enables to enquire the current status from the network.

#### **11.4.1.3 Call divert**

Enables to set Divert all voice calls, Divert if unreachable, Divert if no answer, Divert if busy, Divert all data calls and Cancel all divert.

#### **11.4.1.4 Call barring**

It allows you to restrict the calls that you make and receive with your phone. You can set outgoing calls, incoming calls, cancel all or change barring password. It is a network based service.

#### **11.4.1.5 Line switching**

This option enables you to change the phone line in use.

### **11.4.2 SIM2 call setting**

Please refer to the content in “**SIM1 call setting**”.

### **11.4.3 Auto Redial**

This option enables you to set auto redial on/off.

### **11.4.4 Call time display**

It enables you to on/off the call time display.

### 11.4.5 Call time reminder

This option can provide prompts for a call running in certain duration of time. The following prompting methods are listed according to menu functions:

- **Off:** To turn off the option.
- **Single:** Enter a number between 1 and 3000 second to give prompt of call duration.
- **Periodic:** Enter a number between 30 and 60 second as cycle, to give prompt on connection time at regular intervals.

### 11.4.6 Auto Disconnect

It enables you to disconnect the current call automatically after certain duration of time. You can on/off this option and set the time between 1 and 9999 seconds.

### 11.4.7 Change Voice

This option allows you to change your voice during an active call.

### 11.4.8 Low Battery protect

It enables you to on/off the low battery protect.

### 11.4.9 Background sound

This option enables you to play a background sound during an active call. You can also add your own sound.

### 11.4.10 SMS Responson

This option enables you to type a message, which is delivered automatically to the caller, when you reject a call.

## 11.5 Network Setup

### 11.5.1 SIM1 network setup

#### 11.5.1.1 Network selection

Search or select network can help search the network where you are. You can select the selection mode: Automatic or Manual. When you select automatic, the phone will make the preferential selection according to the network. When you select manual, you are required to select the same network as the registered network.

#### 11.5.1.2 Preferences

Select the preferred networks from the list of available networks. The default network is the network where the SIM card belongs.

### 11.5.2 SIM2 network setup


Please refer to the content in "**SIM1 network setup**".

## 11.6 Security setup

### 11.6.1 SIM1 security setup

#### 11.6.1.1 SIM1 lock

The PIN number can prevent the illegal use of your SIM card. You can set SIM1 lock On / Off by this feature.

 <p>Note:</p>	<p>If you input the wrong PIN code for thrice will ask PUK code. PUK is used to release and modify the locked PIN. If the PUK code is not provided or missed, please contact your network operator.</p>
--	---

#### 11.6.1.2 Fixed dial

This function enables to set the fixed dial option on or off.

#### 11.6.1.3 Barred dial

This function enables you to set the barred dial option On or Off.

#### 11.6.1.4 Change password

This option let you to change the password of your phone.

### 11.6.2 SIM2 security setup

Please refer to the content in “SIM1 security setup”.

### 11.6.3 Phone lock

You can lock or unlock the phone. Enter the password to activate or deactivate the phone lock. When the phone is locked, you will be required to enter the phone password.

### 11.6.4 Private Protection

You can set password to various applications of the phone so as to avoid unauthorized access of your phone. The default password is 0000.

### 11.6.5 Auto keypad lock

You can lock or unlock the phone keyboard and set the key lock time to 5 seconds – 5 min.

### 11.6.6 Change password

This option let you to change the password of your phone.

## 11.6.7 Firewall Setting

### 11.6.7.1 Black List

This function enables you to add the number/group in the black list and activating it enables you to block calls from that number/group. You can choose to close, reject all calls, accept phonebook numbers or to reject group. If you enable the black list, you can also specify whether you want to block the calls from a number/group everyday or any particular day and time.

### 11.6.7.2 Group Setting

This function enables you to create different groups with different settings to block all the numbers of the group. You can add numbers in the group by directly entering the phone numbers or you can select the contacts from the phonebook.

## 11.6.8 Tracker

This function enables you to trace the phone incase if it gets lost. If someone inserts another SIM card in your lost phone, you will receive an SMS from the new SIM card to know who is using your phone. The different options which are to be configured are:

### 11.6.8.1 Status


Enables to set the Status to **On** or **Off**.

### 11.6.8.2 Setting

Enables you to set the password for tracker, specify the bonding number to which the message should be sent in case the SIM is changed and edit the contents of the message. The default password for the tracker is "0000".

## 11.7 Restore Factory Settings

All settings can be restored to factory settings with this function. The Lock code for the phone in factory setting is 0000.

 <p>Note:</p>	<p>On restoring, the phone to factory setting the default network setting will remain the same which is previously configured.</p>
--	--

## 12 Disclaimer

Features and specifications specified in this manual are subject to change without prior notice. Certain mobile phone features may not be activated by your service provider, and/or their network setting may limit the feature's functionality. Services and some features such as GPRS, email may be dependent on the network, SIM card, as well as on the compatibility of the devices used and content formats supported, and may require network/service subscription/solutions. Data transfer speeds are network dependent. In order for Bluetooth devices to communicate with one another, they must use the same Bluetooth Profile. To determine the profiles supported by other Videocon products, visit <http://www.videoconmobiles.com>. For other devices, contact their respective manufacturers. Certain Bluetooth features including those listed may not be supported by all compatible Bluetooth enabled devices, and/ or the functionality of such features may be limited in certain devices, or certain wireless carriers. Always demand for original Videocon mobile phones to protect against buying tinkered and/or used or tampered phones. Buy Videocon tested and Videocon certified compatible accessories and add-ons. The warranty is applicable only for Videocon phones; the company is not responsible for any loss or theft. Always use Videocon original Enhancements (including batteries) for safety. The use of any other type may invalidate warranty applicable to the mobile phone and may also be dangerous. The phone is designed to operate using Lithium-ion batteries approved by the Videocon phone manufacturers. Using non approved batteries with the phone may result in poor performance and damage to the phone or its enhancements or attachments. The display and products visualization here are for illustrative purposes only. All features, functionality and other product specifications are based on the latest available information and are correct at the time of printing; however such product specifications are subject to change without notice based on newer versions and enhancements. The unauthorized copying of copyrighted material is not legal and is inimical to the provisions of the copyright laws of India and other countries.

Kindly refer <http://www.videoconmobiles.com> website for newer versions of information provided in this manual, which might be of further use.

## Appendix I Troubleshooting

If you encounter problems while using the phone, or if it performs erratically, you can consult the information in the following table. If a particular problem cannot be resolved by using the following information, contact the dealer where you purchased the phone.

<b>Problem</b>	<b>Possible causes</b>	<b>Possible solution</b>
Poor reception	The network signal is too weak at your current location, for example, in a basement or near a tall building, because wireless transmissions cannot effectively reach it.	Move to a location where the network signal can be properly received.
	The network is busy at the current time, for example, during peak times, because there may be too much network traffic to handle additional calls.	Avoid using the phone at such time, or try again after waiting a short time.
	You are too far away from a base station for your service provider.	You can request a service area map from your service provider.
Echo or noise	Poor network trunk quality on the part of your service provider.	Press the ending key and dial again. You may be switched to a better-quality network trunk or phone line.
	Poor local telephone line quality	Press the ending key and dial again. You may be switched to a better-quality network trunk or phone line.
Battery not charging properly	The battery or battery charger is damaged.	Contact the dealer.
	The temperature of the phone is below -10°C or higher than 55°C.	Adjust the battery charging environment to avoid extremes of temperature.
	Poor contact between the battery and charger.	Check all connectors to make sure all connections have been properly made.

Shortened standby time	The standby time is related to your service provider system configuration. The same phone used with different service providers' systems will not provide exactly the same length of standby time.	If you are located in an area where signaling is weak, temporarily switch off the phone.
	The battery is depleted. In high temperature environments, battery life will be shortened.	Use a new battery.
	If you are not able to connect to the network, the phone will continue to send out signals as it attempts to locate a base station. Doing so consumes battery power and will consequently shorten standby time.	Change your location to one where the network is accessible, or temporarily turn off your phone.
You cannot switch your phone on.	Battery power has been exhausted.	Recharge the battery.
SIM card error	SIM card malfunction or damage	Take the SIM card to your service provider for testing.
	SIM card is inserted improperly.	Insert the SIM card properly.
	Debris on the SIM card metal area	Use a soft and dry cloth to clean the SIM card metal area.
Unable to connect to the network.	SIM card invalid.	Contact your service provider.
	You are not within the service area of the network.	Check the service area with your service provider.
	Poor signal.	Move to an open space, or if you are inside a building, move closer to a window.
PIN Code is blocked.	You have entered an incorrect PIN code three consecutive times.	Contact your service provider. If the service provider provides the PUK code of the SIM card, use the PUK code to unlock the SIM card.

Unable to enter information into the phone book.	The memory of the phone book is already full.	Delete unnecessary data from the phone book.
Unable to select certain features.	Your service provider does not support these features, or you have not applied for services that provide these features.	Contact your service provider.

## Appendix II Abbreviations and Explanation

GSM	Global System of Mobile Communication
GPRS	General Packet Radio Service
SMS	Short Message Service
WAP	Wireless Application Protocol
FDN	Fixed Dialing Numbers
SIM	Subscriber Identity Module
PIN	Personal Identification Number
PUK	Personal Unblocking Key
IMEI	International Mobile Equipment Identity
MCC	Mobile Country Code
MNC	Mobile Network Code
Call waiting	A service provided by the network, which allows you to answer another incoming call without interrupting the active call, but it is different from conference call. You can only talk to one party while another party is held at the same time.
Call divert	A service provided by the network, which allows you to divert an incoming call to a specified number according to different circumstances.
Roaming	The phone is not used in the area of its local registered network. It includes international and domestic roaming. In this manual it refers to international roaming only.
STK	SIM Toolkit