




DUAL BAND Mobile Cellular Phone SGH-M100


SERVICE *Manual*

Dual Band Mobile Cellular Phone

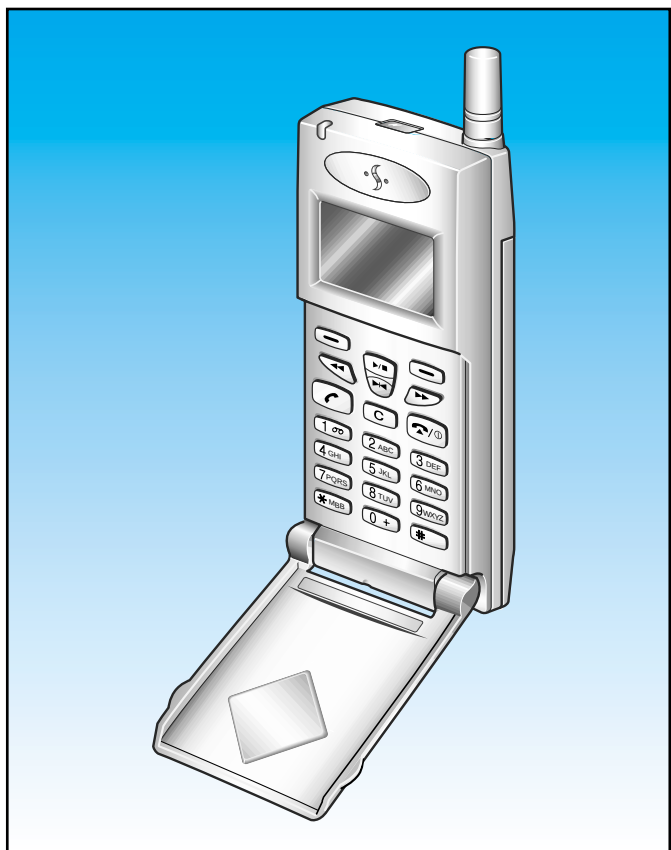


CONTENTS

1. Electrical Parts List
2. Exploded Views and Parts List
3. Block Diagram
4. PCB Views
5. Schematic Diagrams

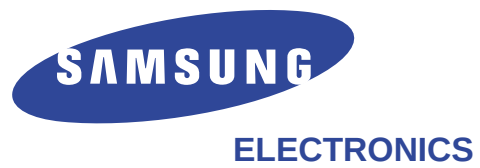

2. Exploded View and its Parts List


2-1 SGH-M100 Cellular phone Exploded View

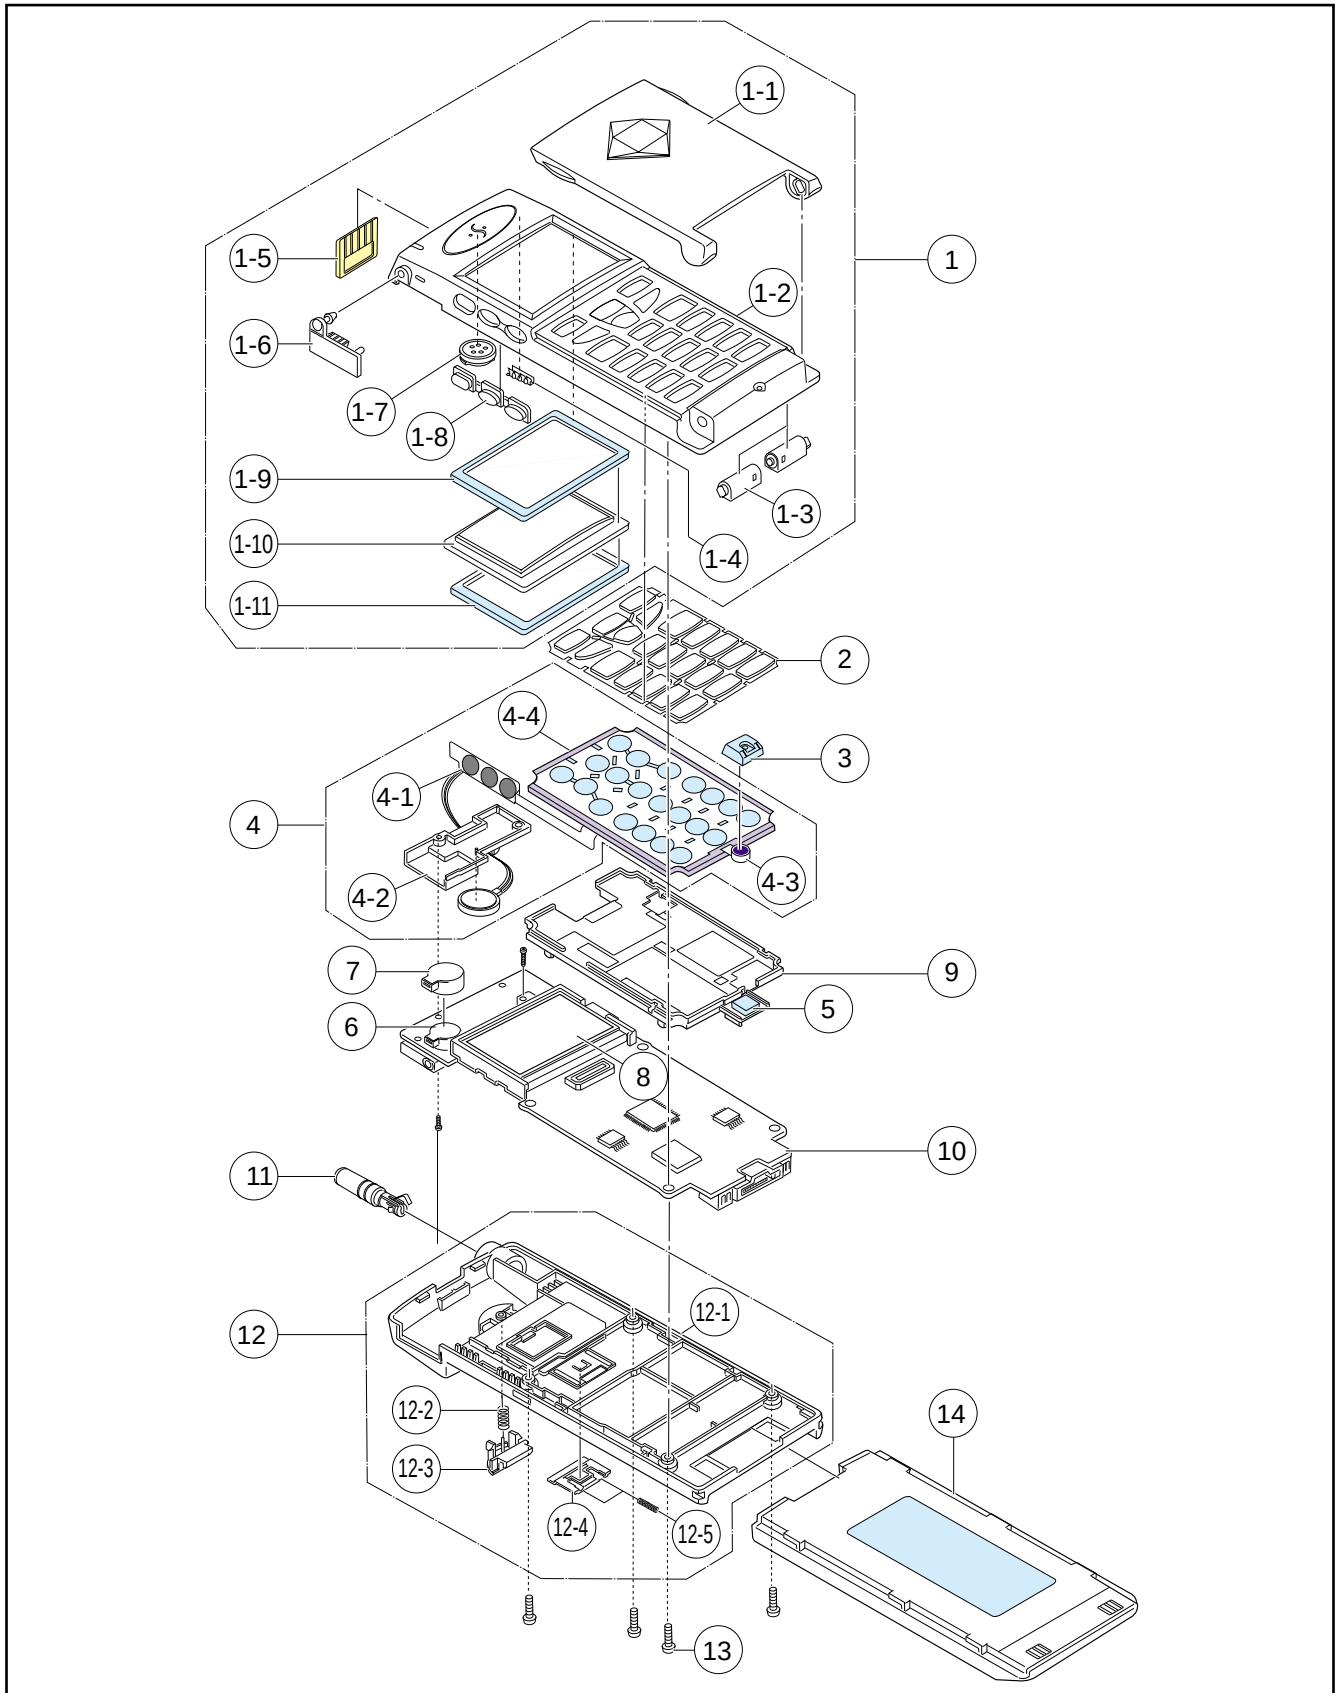


2-2 SGH-M100 Cellular phone Parts List

NO	DESCRIPTION	SEC.CODE	REMARK
1	MEC-FRONT COVER	GH75-00498C	GOLD
1-1	MEC-FLIP COVER	GH75-00500C	
1-2	PMO-FRONT COVER	GH72-01126C	SNA
1-3	MEC-HINGE ASS'Y	GH75-11115A	SNA
1-4	NPR-SHIELD STRIP	GH7100258A	
1-5	PMO-IRDA WINDOW	GH72-01130A	
1-6	PMO-EARJACK HOLDER	GH72-01134A	
1-7	SPEAKER	3001-001148	
1-8	MEC-VOLUME KEY	GH75-00746A	
1-9	MPR-LCD SILICON	GH74-00548A	SNA
1-10	PMO-LCD WINDOW	GH72-01129A	
1-11	MPR-LCD SPONGE	GH74-00493A	SNA
2	PMO-KEY PAD	GH72-01144A	
3	PMO-MIC HOLDER	GH73-00494A	
4	KEY PBA ASS'Y	GH82-00031A	
4-1	VOL KEY ASS'Y	GH59-00092A	
4-2	REAR SHIELD CAN	GH72-01132A	
4-3	MIC	3003-001047	
4-4	METAL DOME	GH59-00101A	
5	MPR-MIC SPONGE	GH74-00557A	
6	BUZZER	3002-001095	
7	RMO-BUZZER HOLDER	GH7300337A	
8	DISPLAY LCD	GH07-00035A	
9	PMO-KEY SHIELD CAN	GH72-01133A	
10	MAIN PBA	GH92-00785A	
11	ANTENNA	GH42-00062B	
12	MEC-REAR COVER	GH75-00499A	GOLD
12-1	PMO-REARCOVER	GH72-011127A	SNA
12-2	IPR-LOCKER SPRING	GH70-10516A	SNA
12-3	PMO-BATTERY LOCKER	GH72-01143A	SNA
12-4	PMO-SIM LOCKER	GH72-00513D	SNA
12-5	IPR-SIM SPRING	GH70-00006A	SNA
13	SCREW-MACHINE	6001-001345	4PCS
14	BATTERY	GH43-00206A	750 mAh


2-3 Test Jig (GH80-00161A)

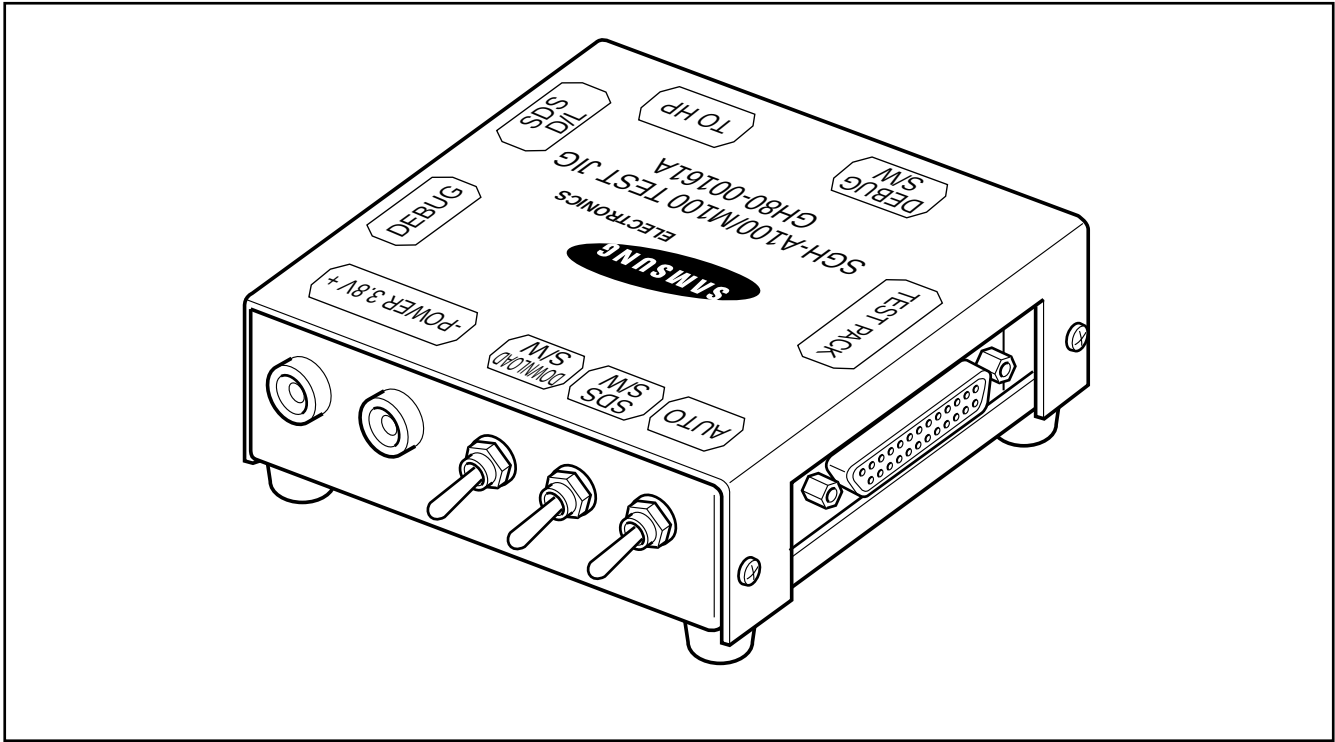

Data Cable

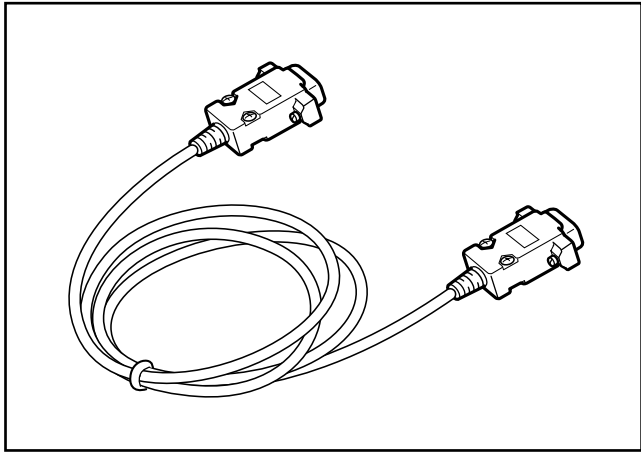


Test Cable

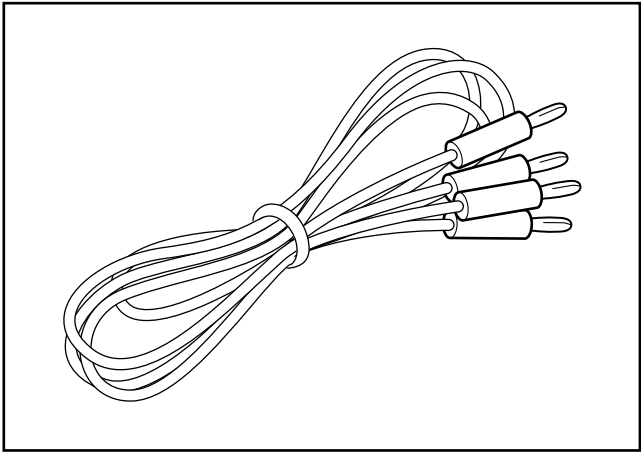

	SWITCH					
MODE	AUTO	SDS S/W	DOWNLOAD S/W	DEBUG S/W	SDS D/L	DEBUG
D/L	HIGH	LOW	HIGH	LOW	CONNECT	N.C
CAL	HIGH	LOW	LOW	HIGH	CONNECT	N.C


2-4 MP3 Data Cable (GH59-00090A)

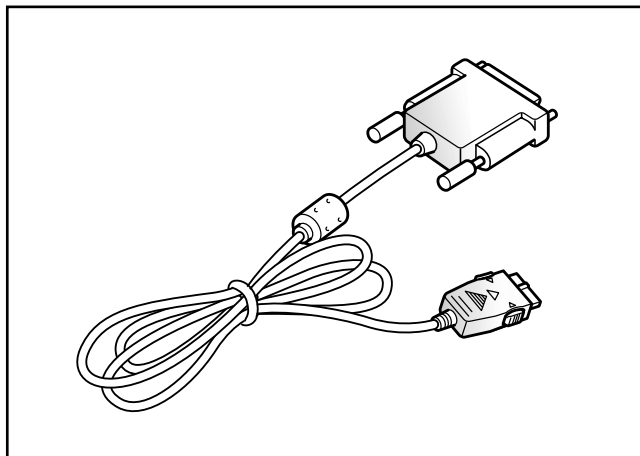

2-5 Desk Top Charger


Europe (GH44-00121A)

China (GH44-00121C)

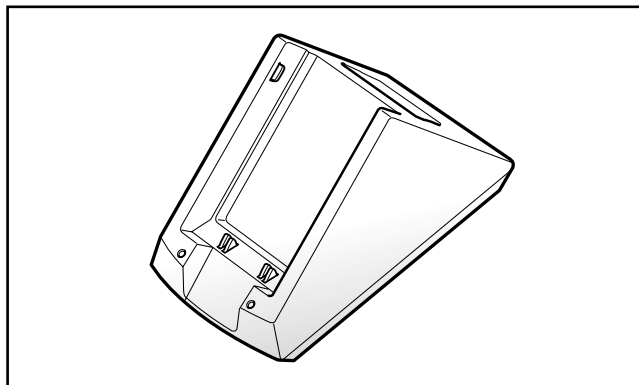


2-6 Cigarette Lighter Adaptor


(GH44-30546A)

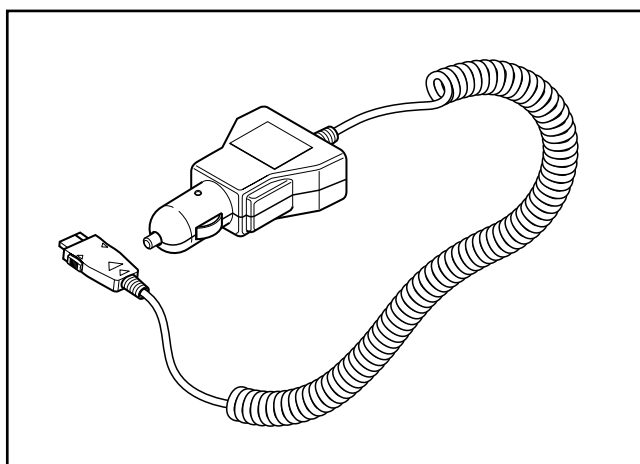


2-7 Test Cable (GH39-00051A)

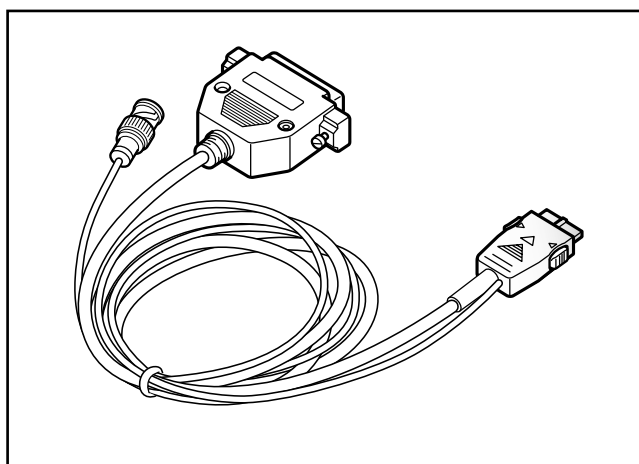

2-8 Jack Adaptor (GH59-00103A)

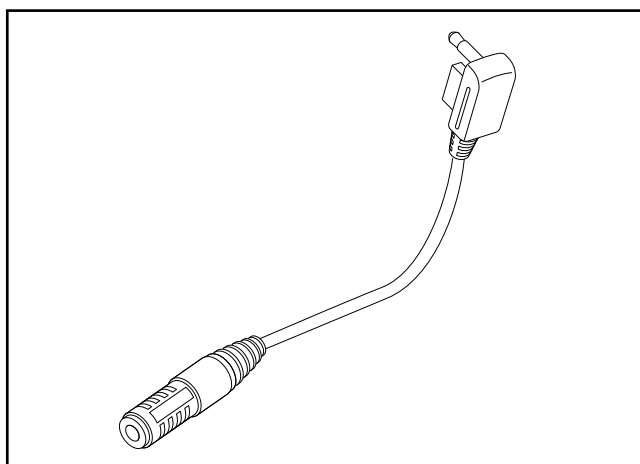


2-9 CD ROM (GH46-00006A)

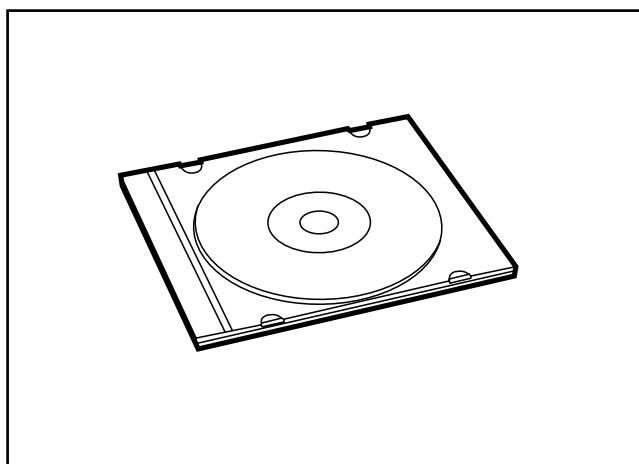


2-10 Travel Adaptor

Europe (GH44-00119A)

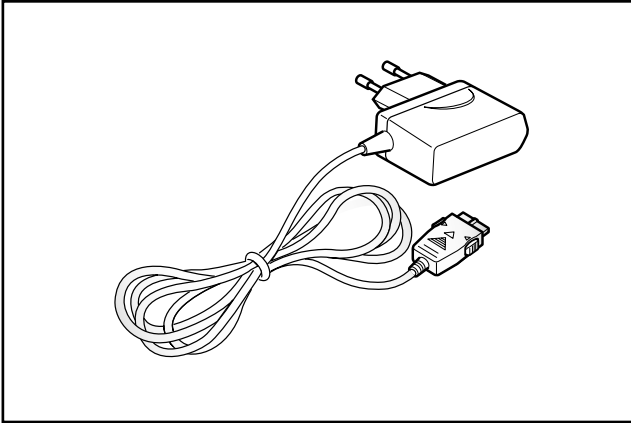


2-11 Travel Adaptor

England (GH44-00119B)

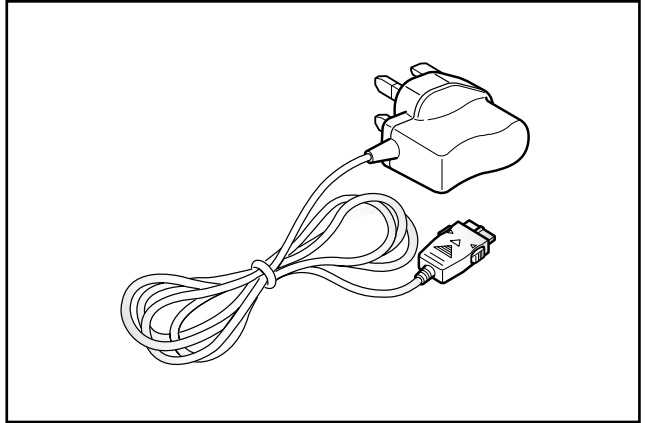


2-12 Travel Adaptor

China (GH44-00119C)

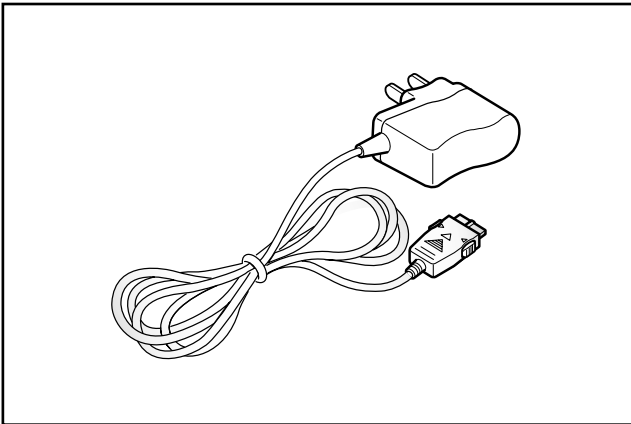

2-13 Travel Adaptor

Australian (GH44-00119D)

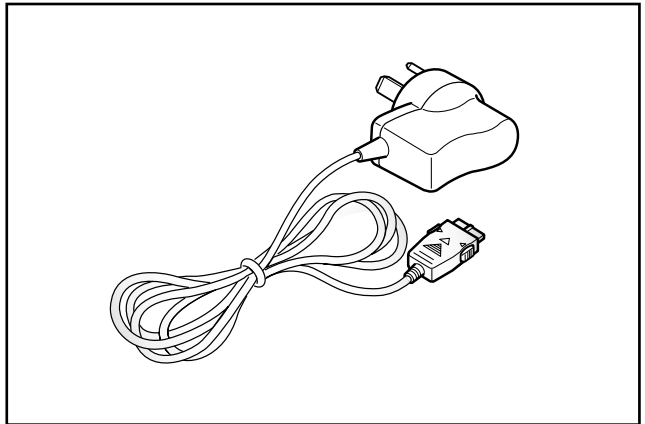

MEMO



1. SGH-M100 MAIN Electrical Parts List

Level	SEC CODE	Design LOC	DESCRIPTIONS
0	GH92-00785A		
1	0401-001033	D201	DIODE-SWITCHING MCL4154, 25 V, 200 mA, M-MELF, TP
1	0401-001091	D1105	DIODE-SWITCHING 1SS376, 250 V, -, SOD-323, TP
1	0404-000108	ZD407	DIODE-SCHOTTKY RB705D, 20 V, 30 mA, SOT-23, TP
1	0404-000108	ZD408	DIODE-SCHOTTKY RB705D, 20 V, 30 mA, SOT-23, TP
1	0404-001044	ZD402	DIODE-SCHOTTKY UPS5817, 20 V, 1 A, SMD, TP
1	0404-001044	ZD608	DIODE-SCHOTTKY UPS5817, 20 V, 1 A, SMD, TP
1	0404-001044	ZD609	DIODE-SCHOTTKY UPS5817, 20 V, 1 A, SMD, TP
1	0405-001057	D301	DIODE-VARACTOR SMV1234-004, 15 V, 50 NA, SOT-23, TP
1	0406-001084	ZD1101	DIODE-TVS SMF05, 6/-/ V, 200 W, -
1	0406-001084	ZD1102	DIODE-TVS SMF05, 6/-/ V, 200 W, -
1	0406-001084	ZD1103	DIODE-TVS SMF05, 6/-/ V, 200 W, -
1	0407-000115	D801	DIODE-ARRAY DAN202U, 80 V, 100 mA, CA2-3, SC-70,
1	0407-001002	D1001	DIODE-ARRAY DAN222, 80 V, 300 mA, CA2-3, EM3, TP
1	0407-001002	D603	DIODE-ARRAY DAN222, 80 V, 300 mA, CA2-3, EM3, TP
1	0407-001002	D901	DIODE-ARRAY DAN222, 80 V, 300 mA, CA2-3, EM3, TP
1	0501-000218	Q1001	TR-SMALL SIGNAL 2SC4081, NPN, 200 mW, UMT, TP, 180-3
1	0501-002011	Q1002	TR-SMALL SIGNAL 2SD2114K, NPN, 200 mW, SOT-23, TP, 8
1	0501-002202	Q402	TR-SMALL SIGNAL MMBT2222AWT1, NPN, 150 mW, SOT-323
1	0501-002202	Q802	TR-SMALL SIGNAL MMBT2222AWT1, NPN, 150 mW, SOT-323
1	0504-000167	Q201	TR-DIGITAL RN1102, NPN, 100 mW, 10K/10K, SSM, TP
1	0504-000168	Q1101	TR-DIGITAL RN1104, NPN, 100 mW, 47K/47K, SSM, TP
1	0504-000168	Q606	TR-DIGITAL RN1104, NPN, 100 mW, 47K/47K, SSM, TP
1	0504-000168	Q607	TR-DIGITAL RN1104, NPN, 100 mW, 47K/47K, SSM, TP
1	0504-000168	Q801	TR-DIGITAL RN1104, NPN, 100 mW, 47K/47K, SSM, TP
1	0504-001012	Q701	TR-DIGITAL DTC114YE, NPN, 150 mW, 10K/47K, EMT3, TP
1	0504-001012	Q702	TR-DIGITAL DTC114YE, NPN, 150 mW, 10K/47K, EMT3, TP
1	0504-001012	Q703	TR-DIGITAL DTC114YE, NPN, 150 mW, 10K/47K, EMT3, TP
1	0504-001042	U701	TR-DIGITAL BCR10PN, NPN/PNP, 250 mW, 10K/10K,
1	0504-001042	U702	TR-DIGITAL BCR10PN, NPN/PNP, 250 mW, 10K/10K,
1	0504-001042	U703	TR-DIGITAL BCR10PN, NPN/PNP, 250 mW, 10K/10K,
1	0504-001042	U904	TR-DIGITAL BCR10PN, NPN/PNP, 250 mW, 10K/10K,
1	0505-001237	Q401	FET-SILICON MGSF3442 V, N, 20 V, 4 A, 0.07 ohm, 2 W,
1	0506-001052	U1003	TR-ARRAY UMH9N, NPN, 2, 150 mW, SC-88, TP, 68-
1	0506-001052	U607	TR-ARRAY UMH9N, NPN, 2, 150 mW, SC-88, TP, 68-

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	0506-001052	U609	TR-ARRAY UMH9N, NPN, 2, 150 mW, SC-88, TP, 68-
1	0601-001094	LED201	LED CHIP, Y-GRN, 0.8 x 1.1 mm, 570nm
1	0604-001146	LED901	PHOTO-IRDA -, 875NM, 500 mW, 30DEG, TP
1	0801-002015	U710	IC-CMOS LOGIC 4S81, AND GATE, SOP, 5P, 63MIL, SIN
1	0801-002015	U903	IC-CMOS LOGIC 4S81, AND GATE, SOP, 5P, 63MIL, SIN
1	0801-002399	U711	IC-CMOS LOGIC TC7S86FU, EX-OR GATE, SSOP, 5P, 11
1	0801-002399	U804	IC-CMOS LOGIC TC7S86FU, EX-OR GATE, SSOP, 5P, 11
1	0902-001386	U201	IC-MICROPROCESSOR 46, 16Bit, uBGA, 160P, -, 32 MHz, TR,
1	1001-001132	U1002	IC-ANALOG MULTIPLEX MAX4525EUB-T, TTL/CMOS, SOP,
1	1003-001300	U1104	IC-DRIVER SM8142BD-EL, SOJ, 8P, 110MIL, -, -, TP, PLASTIC, -, -
1	1103-001184	U902	IC-EEPROM 24C256, 32K x 8Bit, dBGa, 8P, 92MIL, -, 2.7 V, -,
1	1109-001135	U901	IC-ETC. MEMORY 1342, 128K x 16BIT, CSP, 72P, -, 100NS, 3 V,
1	1201-001420	U502	IC-IF/RF AMP RF210, TSSOP, 20P, 255MIL, -, -, PLASTIC, 5
1	1201-001421	U707	IC-IF/RF AMP RF142, TSSOP, 20P, 255MIL, -, 15 dB,
1	1201-001422	U708	IC-POWER AMP RM008, MCM, 16P, 457MIL, -, -, PALSTIC, 4.5 V, -,
1	1201-001462	U801	IC-AUDIO AMP 4864, MSOP, 8P, 118MIL, -, -, PLASTIC, 6 V, 300
1	1201-001462	U802	IC-AUDIO AMP 4864, MSOP, 8P, 118MIL, -, -, PLASTIC, 6 V, 300
1	1203-001515	U605	IC-BATTERY 1510, SSOP, 16P, 150MIL, PLASTIC, 3
1	1203-001703	U401	IC-VOLTAGE REGULATOR 20436, TQFP, 48P, 275MIL, PLASTIC,
1	1203-001917	U205	IC-VOLTAGE REGULATOR 5213, SOT-23, 5P, 50MIL, PLASTIC, 3.3,
1	1205-001647	U301	IC-TRANSCEIVER RF137, TQFP, 48P, 275MIL, PALSTIC, 5 V, 600
1	1205-001708	U101	IC-CODEC 20420, BGA, 100P, -, PLASTIC, 2.7 V, -, -25TO+85C, TR,
1	1209-001219	U706	IC-SENSOR LM60C, SOT-23, 3P, 115MIL, PLASTIC
1	1405-001018	D1102	VARISTOR 14 V, -, 1.6 x 0.8 mm, TP
1	1405-001018	D1103	VARISTOR 14 V, -, 1.6 x 0.8 mm, TP
1	1405-001019	D1101	VARISTOR 5.6 V, -, 1.6 x 0.8 mm, TP
1	1405-001082	V101	VARISTOR 5.6 V, 20 A, 1 x 0.5 x 0.6 mm, TP
1	1405-001082	V102	VARISTOR 5.6 V, 20 A, 1 x 0.5 x 0.6 mm, TP
1	1405-001082	V401	VARISTOR 5.6 V, 20 A, 1 x 0.5 x 0.6 mm, TP
1	1405-001082	V801	VARISTOR 5.6 V, 20 A, 1 x 0.5 x 0.6 mm, TP
1	1405-001082	V802	VARISTOR 5.6 V, 20 A, 1 x 0.5 x 0.6 mm, TP
1	1405-001082	V803	VARISTOR 5.6 V, 20 A, 1 x 0.5 x 0.6 mm, TP
1	1405-001082	V804	VARISTOR 5.6 V, 20 A, 1 x 0.5 x 0.6 mm, TP
1	1405-001082	V805	VARISTOR 5.6 V, 20 A, 1 x 0.5 x 0.6 mm, TP
1	1405-001082	V806	VARISTOR 5.6 V, 20 A, 1 x 0.5 x 0.6 mm, TP

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	1405-001082	V807	VARISTOR 5.6 V, 20 A, 1 x 0.5 x 0.6 mm, TP
1	2007-000070	R1115	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1608
1	2007-000070	R410	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1608
1	2007-000070	R815	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1608
1	2007-000104	R1113	R-CHIP 150 kohm, 5 %, 1/16 W, DA, TP, 1608
1	2007-000137	R505	R-CHIP 2 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000137	R507	R-CHIP 2 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000138	R118	R-CHIP 100 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000138	R127	R-CHIP 100 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000138	R222	R-CHIP 100 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000138	R322	R-CHIP 100 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000138	R323	R-CHIP 100 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000138	R418	R-CHIP 100 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000138	R818	R-CHIP 100 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000138	R819	R-CHIP 100 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000139	R717	R-CHIP 220 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R1006	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R102	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R105	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R108	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R1106	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R1107	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R1108	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R1109	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R1110	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R1111	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R1112	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R1114	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R201	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R309	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R704	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R716	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R807	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R808	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R817	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2007-000140	R905	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000141	R419	R-CHIP 2.2 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000143	R304	R-CHIP 4.7 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000143	R314	R-CHIP 4.7 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000143	R903	R-CHIP 4.7 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000144	R708	R-CHIP 5.1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000144	R711	R-CHIP 5.1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000146	R313	R-CHIP 6.8 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R1005	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R1102	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R1103	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R1104	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R1105	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R202	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R204	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R205	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R206	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R207	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R218	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R219	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R220	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R221	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R409	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R701	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R702	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R705	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R802	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R803	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R915	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R917	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000151	R902	R-CHIP 15 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000153	R812	R-CHIP 22 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000156	R643	R-CHIP 30 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000157	R1007	R-CHIP 47 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000157	R710	R-CHIP 47 kohm, 5 %, 1/16 W, DA, TP, 1005

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2007-000162	R1001	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R1003	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R1004	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R1008	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R401	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R638	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R804	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R805	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000170	R223	R-CHIP 1 Mohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000170	R715	R-CHIP 1 Mohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000172	R101	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000172	R1119	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000172	R119	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000172	R224	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000172	R303	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000172	R308	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000172	R310	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000172	R321	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000172	R326	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000172	R422	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000172	R501	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000173	R117	R-CHIP 22 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000173	R312	R-CHIP 22 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000173	R325	R-CHIP 22 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000775	R116	R-CHIP 33 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000932	R215	R-CHIP 470 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001292	R217	R-CHIP 33 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001298	R301	R-CHIP 51 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001298	R305	R-CHIP 51 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001298	R327	R-CHIP 51 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001298	R328	R-CHIP 51 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001298	R703	R-CHIP 51 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001298	R709	R-CHIP 51 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001298	R820	R-CHIP 51 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001298	R821	R-CHIP 51 ohm, 5 %, 1/16 W, DA, TP, 1005

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2007-001305	R713	R-CHIP 120 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001305	R714	R-CHIP 120 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001306	R721	R-CHIP 150 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001306	R809	R-CHIP 150 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001308	R722	R-CHIP 200 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001323	R306	R-CHIP 3 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001323	R307	R-CHIP 3 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-002965	R720	R-CHIP 15 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-003001	R719	R-CHIP 12 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007001	R1002	R-CHIP 3.9 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007001	R302	R-CHIP 3.9 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007001	R329	R-CHIP 3.9 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007008	R650	R-CHIP 300 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007092	R107	R-CHIP 1.1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007092	R112	R-CHIP 1.1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007095	R718	R-CHIP 390 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007107	R640	R-CHIP 100 kohm, 1 %, 1/16 W, DA, TP, 1005
1	2007-007107	R641	R-CHIP 100 kohm, 1 %, 1/16 W, DA, TP, 1005
1	2007-007135	R646	R-CHIP 18 kohm, 1 %, 1/16 W, DA, TP, 1005
1	2007-007142	R644	R-CHIP 10 kohm, 1 %, 1/16 W, DA, TP, 1005
1	2007-007193	R530	R-CHIP 5.1 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007197	R103	R-CHIP 3.3 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007197	R104	R-CHIP 3.3 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007197	R114	R-CHIP 3.3 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007197	R115	R-CHIP 3.3 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007309	R647	R-CHIP 12 kohm, 1 %, 1/16 W, DA, TP, 1005
1	2007-007312	R707	R-CHIP 20 kohm, 1 %, 1/16 W, DA, TP, 1005
1	2007-007468	R106	R-CHIP 121 kohm, 1 %, 1/16 W, DA, TP, 1005
1	2007-007470	R706	R-CHIP 7.5 kohm, 1 %, 1/16 W, DA, TP, 1005
1	2007-007592	R639	R-CHIP 270 kohm, 1 %, 1/16 W, DA, TP, 1005
1	2007-007592	R645	R-CHIP 270 kohm, 1 %, 1/16 W, DA, TP, 1005
1	2007-007771	R110	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R1101	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R1118	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R113	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2007-007771	R125	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R126	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R208	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R212	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R213	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R315	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R403	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R415	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R420	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R421	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R712	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R730	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R731	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R813	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R814	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R906	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R907	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R908	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R914	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007833	R406	R-CHIP 0.68 ohm, 2 %, 1/10 W, DA, TP, 2012
1	2007-007875	R637	R-CHIP 160 kohm, 1 %, 1/16 W, DA, TP, 1005
1	2203-000138	C714	C-CERAMIC, CHIP 1.5 nF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000233	C108	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C326	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C329	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C356	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C402	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C510	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C701	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C702	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C704	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C705	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C712	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C728	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C731	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2203-000233	C915	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000254	C1115	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C1117	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C216	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C317	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C324	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C327	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C328	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C352	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C401	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C720	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C721	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C734	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000254	C914	C-CERAMIC, CHIP 10 nF, 10 %, 16 V, X7R, TP, 1005, -
1	2203-000278	C113	C-CERAMIC, CHIP 0.01 nF, 0.5 pF, 50 V, NP0, TP, 1005
1	2203-000278	C136	C-CERAMIC, CHIP 0.01 nF, 0.5 pF, 50 V, NP0, TP, 1005
1	2203-000278	C137	C-CERAMIC, CHIP 0.01 nF, 0.5 pF, 50 V, NP0, TP, 1005
1	2203-000278	C709	C-CERAMIC, CHIP 0.01 nF, 0.5 pF, 50 V, NP0, TP, 1005
1	2203-000278	C716	C-CERAMIC, CHIP 0.01 nF, 0.5 pF, 50 V, NP0, TP, 1005
1	2203-000278	C730	C-CERAMIC, CHIP 0.01 nF, 0.5 pF, 50 V, NP0, TP, 1005
1	2203-000278	C832	C-CERAMIC, CHIP 0.01 nF, 0.5 pF, 50 V, NP0, TP, 1005
1	2203-000311	C330	C-CERAMIC, CHIP 0.12 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000311	C331	C-CERAMIC, CHIP 0.12 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000330	C301	C-CERAMIC, CHIP 0.012 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000330	C306	C-CERAMIC, CHIP 0.012 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000330	C350	C-CERAMIC, CHIP 0.012 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000330	C520	C-CERAMIC, CHIP 0.012 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000359	C103	C-CERAMIC, CHIP 0.15 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000359	C106	C-CERAMIC, CHIP 0.15 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000359	C128	C-CERAMIC, CHIP 0.15 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000359	C201	C-CERAMIC, CHIP 0.15 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000359	C203	C-CERAMIC, CHIP 0.15 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000359	C206	C-CERAMIC, CHIP 0.15 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000359	C210	C-CERAMIC, CHIP 0.15 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000359	C403	C-CERAMIC, CHIP 0.15 nF, 5 %, 50 V, NP0, TP, 1005

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2203-000359	C405	C-CERAMIC, CHIP 0.15 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000359	C723	C-CERAMIC, CHIP 0.15 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000386	C316	C-CERAMIC, CHIP 0.015 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000425	C308	C-CERAMIC, CHIP 0.018 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000425	C348	C-CERAMIC, CHIP 0.018 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000438	C318	C-CERAMIC, CHIP 1 nF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000438	C349	C-CERAMIC, CHIP 1 nF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000438	C703	C-CERAMIC, CHIP 1 nF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000438	C725	C-CERAMIC, CHIP 1 nF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000466	C711	C-CERAMIC, CHIP 0.001 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-000466	C740	C-CERAMIC, CHIP 0.001 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-000489	C529	C-CERAMIC, CHIP 2.2 nF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000628	C212	C-CERAMIC, CHIP 0.022 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000628	C213	C-CERAMIC, CHIP 0.022 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000628	C309	C-CERAMIC, CHIP 0.022 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000628	C410	C-CERAMIC, CHIP 0.022 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000628	C506	C-CERAMIC, CHIP 0.022 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000628	C512	C-CERAMIC, CHIP 0.022 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000628	C526	C-CERAMIC, CHIP 0.022 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000628	C528	C-CERAMIC, CHIP 0.022 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000628	C707	C-CERAMIC, CHIP 0.022 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000643	C302	C-CERAMIC, CHIP 0.024 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000643	C307	C-CERAMIC, CHIP 0.024 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000696	C525	C-CERAMIC, CHIP 0.002 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-000696	C735	C-CERAMIC, CHIP 0.002 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-000725	C733	C-CERAMIC, CHIP 3.9 nF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000812	C132	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C138	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C311	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C313	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C314	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C321	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C333	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C351	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C706	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2203-000812	C710	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C713	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C719	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C722	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C724	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C732	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C828	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C829	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C830	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000812	C831	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000854	C715	C-CERAMIC, CHIP 0.039 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000854	C717	C-CERAMIC, CHIP 0.039 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000940	C312	C-CERAMIC, CHIP 470 pF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000940	C343	C-CERAMIC, CHIP 470 pF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000995	C1119	C-CERAMIC, CHIP 0.047 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000995	C143	C-CERAMIC, CHIP 0.047 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000995	C145	C-CERAMIC, CHIP 0.047 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000995	C219	C-CERAMIC, CHIP 0.047 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000995	C515	C-CERAMIC, CHIP 0.047 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-001017	C344	C-CERAMIC, CHIP 0.004 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-001017	C347	C-CERAMIC, CHIP 0.004 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-001239	C325	C-CERAMIC, CHIP 0.082 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-001383	C572	C-CERAMIC, CHIP 0.0005 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-001385	C523	C-CERAMIC, CHIP 0.0015 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-001405	C738	C-CERAMIC, CHIP 22 nF, +80-20 %, 25 V, Y5 V, TP, 1005
1	2203-001432	C104	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-001432	C107	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-001432	C1118	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-001432	C112	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-001432	C116	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-001432	C122	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-001432	C123	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-001432	C126	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-001432	C127	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-001432	C129	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2203-001432	C135	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-001432	C911	C-CERAMIC, CHIP 47 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-002443	C115	C-CERAMIC, CHIP 0.33 nF, 10 %, 50 V, X7R, TP, 1005
1	2203-002443	C354	C-CERAMIC, CHIP 0.33 nF, 10 %, 50 V, X7R, TP, 1005
1	2203-002759	C737	C-CERAMIC, CHIP 15 nF, +80-20 %, 50 V, Y5 V, TP, 1005, -
1	2203-005054	C739	C-CERAMIC, CHIP 0.0047 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-005061	C1003	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C1106	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C1107	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C1108	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C1109	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C211	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C615	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C616	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C810	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C812	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005065	C1002	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C1004	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C1101	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C1102	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C1103	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C1104	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C1105	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C1110	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C119	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C215	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C217	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C404	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C406	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C409	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C411	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C413	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C421	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C617	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C801	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2203-005065	C804	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C809	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C811	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C818	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C821	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C903	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005065	C917	C-CERAMIC, CHIP 1000 nF, +80-20 %, 10 V, Y5 V, TP, 1608
1	2203-005158	C114	C-CERAMIC, CHIP 0.0022 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-005158	C303	C-CERAMIC, CHIP 0.0022 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-005158	C304	C-CERAMIC, CHIP 0.0022 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-005158	C332	C-CERAMIC, CHIP 0.0022 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-005158	C337	C-CERAMIC, CHIP 0.0022 nF, 0.25 pF, 50 V, NP0, TP, 1005
1	2203-005382	C117	C-CERAMIC, CHIP 0.006 nF, 0.1 pF, 50 V, NP0, TP, 1005
1	2203-005383	C144	C-CERAMIC, CHIP 7 pF, 0.1 pF, 50 V, NPO, TP, 1005, -
1	2203-005509	C101	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C105	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C130	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C202	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C204	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C205	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C207	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C209	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C408	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C412	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C912	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C913	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005509	C916	C-CERAMIC, CHIP 330 nF, +80-20 %, 10 V, Y5 V, TP, 1005
1	2203-005562	C427	C-CERAMIC, CHIP 10000 nF, +80-20 %, 10 V, Y5 V, TP, 3216
1	2203-005562	C618	C-CERAMIC, CHIP 10000 nF, +80-20 %, 10 V, Y5 V, TP, 3216
1	2203-005562	C736	C-CERAMIC, CHIP 10000 nF, +80-20 %, 10 V, Y5 V, TP, 3216
1	2203-005682	C415	C-CERAMIC, CHIP 0.033 nF, 5 %, 25 V, NP0, TP, 0603
1	2203-005682	C423	C-CERAMIC, CHIP 0.033 nF, 5 %, 25 V, NP0, TP, 0603
1	2203-005682	C428	C-CERAMIC, CHIP 0.033 nF, 5 %, 25 V, NP0, TP, 0603
1	2203-005708	C1116	C-CERAMIC, CHIP 100 nF, 10 %, 100 V, Y5P, TP, 3225
1	2301-001197	C310, C342	C-FILM, CHIP 390 pF, 5 %, 16 V, TP, 2 x 1.25 x 0.8, -

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2301-001230	C315	C-FILM, CHIP 10 nF, 5 %, 16 V, TP, 2012, -
1	2301-001230	C346	C-FILM, CHIP 10 nF, 5 %, 16 V, TP, 2012, -
1	2404-001088	C334	C-TA, CHIP 2.2 uF, 20 %, 6.3 V, GP, TP, 2012, -
1	2404-001088	C339	C-TA, CHIP 2.2 uF, 20 %, 6.3 V, GP, TP, 2012, -
1	2404-001099	C338	C-TA, CHIP 68 uF, 20 %, 6.3 V, GP, TP, 4035, -
1	2404-001100	C111	C-TA, CHIP 33 uF, 20 %, 6.3 V, GP, TP, 3719, -
1	2404-001100	C131	C-TA, CHIP 33 uF, 20 %, 6.3 V, GP, TP, 3719, -
1	2404-001100	C407	C-TA, CHIP 33 uF, 20 %, 6.3 V, GP, TP, 3719, -
1	2404-001100	C414	C-TA, CHIP 33 uF, 20 %, 6.3 V, GP, TP, 3719, -
1	2404-001100	C805	C-TA, CHIP 33 uF, 20 %, 6.3 V, GP, TP, 3719, -
1	2404-001100	C806	C-TA, CHIP 33 uF, 20 %, 6.3 V, GP, TP, 3719, -
1	2404-001105	C102	C-TA, CHIP 10 uF, 20 %, 6.3 V, GP, TP, 2012
1	2404-001105	C319	C-TA, CHIP 10 uF, 20 %, 6.3 V, GP, TP, 2012
1	2404-001105	C511	C-TA, CHIP 10 uF, 20 %, 6.3 V, GP, TP, 2012
1	2404-001105	C620, C621	C-TA, CHIP 10 uF, 20 %, 6.3 V, GP, TP, 2012
1	2404-001134	C424	C-TA, CHIP 100 uF, 20 %, 6.3 V, LZ, TP, 4028
1	2404-001134	C425	C-TA, CHIP 100 uF, 20 %, 6.3 V, LZ, TP, 4028
1	2404-001134	C426	C-TA, CHIP 100 uF, 20 %, 6.3 V, LZ, TP, 4028
1	2404-001134	C741	C-TA, CHIP 100 uF, 20 %, 6.3 V, LZ, TP, 4028
1	2404-001134	C822	C-TA, CHIP 100 uF, 20 %, 6.3 V, LZ, TP, 4028
1	2404-001134	C823	C-TA, CHIP 100 uF, 20 %, 6.3 V, LZ, TP, 4028
1	2703-000217	L1102	INDUCTOR-SMD 470uH, 10 %, 2.5 x 3.2 x 2 mm
1	2703-000310	L101	INDUCTOR-SMD 1.8uH, 10 %, 0.8 x 1.6 x 0.8 mm
1	2703-001178	L512	INDUCTOR-SMD 3.3 nH, 0.3 nH, 1 x 0.5 x 0.5 mm
1	2703-001180	L1101	INDUCTOR-SMD 15 nH, 5 %, 1 x 0.5 x 0.5 mm
1	2703-001206	L509	INDUCTOR-SMD 4.7 nH, 0.3 nH, 1.6 x 0.8 x 0.8 mm
1	2703-001232	L313	INDUCTOR-SMD 1.5uH, 10 %, 1.6 x 0.8 x 0.8 mm
1	2703-001257	L703	INDUCTOR-SMD 3.9 nH, 0.3 nH, 1.6 x 0.8 x 0.8 mm
1	2703-001297	L316	INDUCTOR-SMD 10 nH, 10 %, 1.6 x 0.8 x 0.8 mm
1	2703-001513	L701	INDUCTOR-SMD 100 nH, 5 %, 1.8 x 1.12 x 1.02 mm
1	2703-001513	L702	INDUCTOR-SMD 100 nH, 5 %, 1.8 x 1.12 x 1.02 mm
1	2703-001543	L303	INDUCTOR-SMD 33 nH, 5 %, 1.8 x 1.12 x 1.02 mm
1	2703-001543	L304	INDUCTOR-SMD 33 nH, 5 %, 1.8 x 1.12 x 1.02 mm
1	2703-001545	L307	INDUCTOR-SMD 47 nH, 5 %, 1.8 x 1.12 x 1.02 mm
1	2703-001547	L314	INDUCTOR-SMD 10 nH, 5 %, 1.8 x 1.12 x 1.02 mm

Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2703-001547	L315	INDUCTOR-SMD 10 nH, 5 %, 1.8 x 1.12 x 1.02 mm
1	2703-001595	L402	INDUCTOR-SMD 47 nH, 5 %, 1.0 x 0.5 x 0.5 mm
1	2703-001600	L308	INDUCTOR-SMD 6.8 nH, 10 %, 1.6 x 0.8 x 0.8 mm
1	2703-001600	L309	INDUCTOR-SMD 6.8 nH, 10 %, 1.6 x 0.8 x 0.8 mm
1	2703-001600	L310	INDUCTOR-SMD 6.8 nH, 10 %, 1.6 x 0.8 x 0.8 mm
1	2703-001600	L311	INDUCTOR-SMD 6.8 nH, 10 %, 1.6 x 0.8 x 0.8 mm
1	2703-001600	L505	INDUCTOR-SMD 6.8 nH, 10 %, 1.6 x 0.8 x 0.8 mm
1	2703-001600	L506	INDUCTOR-SMD 6.8 nH, 10 %, 1.6 x 0.8 x 0.8 mm
1	2703-001685	L503	INDUCTOR-SMD 82 nH, 5 %, 1.7 x 1.14 x 1.02 mm
1	2703-001685	L504	INDUCTOR-SMD 82 nH, 5 %, 1.7 x 1.14 x 1.02 mm
1	2703-001735	L524	INDUCTOR-SMD 3.9 nH, 10 %, 1 x 0.5 x 0.5 mm
1	2703-001853	L601	INDUCTOR-SMD 10 uH, 20 %, 6 x 6 x 1.8 mm
1	2703-001854	L401	INDUCTOR-SMD 22 uH, 20 %, 4.8 x 4.8 x 1.8 mm
1	2801-003747	OSC201	CRYSTAL-SMD .032768 MHz, 30 ppm, 28-ACM, 9 pF, 50 ohm, TP
1	2801-003914	OSC101	CRYSTAL-SMD 19.5 MHz, 10 ppm, 28-ACF, 10.2 pF, 50 ohm, TP
1	2806-001191	OSC301	OSCILLATOR-VCO 1258-1360 MHz, -, 50 ohm, TP, 2.7 V, 20 mA
1	2806-001192	U709	OSCILLATOR-VCO 902.5/1747.5 MHz, -, -, TP, 2.7 V, 50 mA
1	2903-001211	F302	FILTER-CERAMIC BP, 14.6 MHz, 300 KHz, 6 dB, 1 dB, TP, -
1	2904-001096	F502	FILTER-SAW1.8425GHz, 75 MHz, +-37.5 MHz/2.5dB, TP, +-15
1	2904-001124	F501	FILTER-SAW947.5 MHz, 25 MHz, +-12.5 MHz/1.4dB, TP, +-12.5
1	2904-001165	F301	FILTER-SAW400 MHz, .28 MHz, +-70 KHz, TP, 6.5 dB, -
1	2909-001084	U704	FILTER-DUPLEXER 942.5 MHz, 897.5 MHz, 1/1.2 dB, TP, -, -
1	3002-001095	AU801	BUZZER-MAGNETIC 93dB, 3.6 V, 90 mA, 2550Hz, TP
1	3301-001105	B301	CORE-FERRITE AB, 1.6 x 0.8 x 0.8 mm, -, -
1	3301-001105	B701	CORE-FERRITE AB, 1.6 x 0.8 x 0.8 mm, -, -
1	3301-001208	B601	CORE-FERRITE BEAD AB, 1.6 x 0.8 x 0.8 mm, -, -
1	3301-001208	B602	CORE-FERRITE BEAD AB, 1.6 x 0.8 x 0.8 mm, -, -
1	3709-001144	CN401	CONNECTOR-CARD EDGE 6P, 2.54 mm, SMD-S, AU30U
1	3710-001596	CN1001	CONNECTOR-SOCKET 40P, 2R, 0.5 mm, SMD-S, AUF
1	3710-001600	CN1101	CONNECTOR-SOCKET 18P, 1R, 0.5 mm, SMD-A, AUF
1	3722-001471	CN801	JACK-PHONE 8P, 2.6PI, -, BLK, -
1	4302-001081	BAT1	BATTERY-LI(2ND) -, .25MAH, COIN, 0.03MA, -, -
1	4709-001144	U705	COUPLER-DIRECTION 897.5/1747.5 MHz, 19 dB/14 dB, 24 dB, 2 x
1	GH07-00035A	U1101	DISPLAY LCD-SGHM100 SGH-M100, UG12B50-FGHTX-A,
1	GH39-00054A	SEMI-RIGID	CBF SIGNAL-SGHM100 SEMI-RIGID SGH-M100, SEMI-RIGID
1	GH41-00105A		PCB-SGHM100 MAIN SGH-M100, FR-4, 3L, -, 0.7T, 118 x
1	GH72-01131A		PMO-LCD BRACKET SGH-M100, ABS, -, -, -
1	GH73-00337A		RMO-BUZZER HOLDER SGH-M100, CR, -, BLK, 60


SGH-M100 MP3 Electrical Parts List

Level	SEC CODE	Design LOC	DESCRIPTIONS
0	GH92-00850A		
1	0401-000160	D1	DIODE-SWITCHING ISS314, 30 V, 100 mA, USC, TP
1	0401-000160	D2	DIODE-SWITCHING ISS314, 30 V, 100 mA, USC, TP
1	0401-000160	D3	DIODE-SWITCHING ISS314, 30 V, 100 mA, USC, TP
1	0406-001084	U9	DIODE-TVSSMF05, 6/-/ V, 200 W, -
1	0501-000462	Q1	TR-SMALL SIGNAL MMBT2907A, PNP, 225m W, SOT-23, TP,
1	0601-001343	LD1, LD2, LD3, LD4	LED CHIP, Y-GRN, 1.1 x 0.8 mm, 570NM
1	0601-001343	LD5, LD6, LD7, LD8	LED CHIP, Y-GRN, 1.1 x 0.8 mm, 570NM
1	1001-001088	U10	IC-ANALOG SWITCH MAX4544EUT-T, -, SOT-23, 6P, -, SINGLE, 13
1	1002-000174	U2	IC-D/A CONVERTER CS4331-KS, 18BIT, SOP, 8P, -, -, ST,
1	1009-001006	U8	IC-HALL EFFECT S/W A3210ELH, SC-74A, 3P, -, TP, -, -, 5 V,
1	1107-001183	U3	IC-FLASH MEMORY29DU256, 32K x 8BIT, TSOP1, 48P, 724MIL,
1	1201-001465	U1	IC-AUDIO AMP 4881, MSOP, 8P, 118MIL, DUAL, -, PLASTIC, 6
1	1203-000392	U4	IC-RESET 809, SOP, 3P, -, PLASTIC, -0.3/6 V, 4
1	1203-001717	U5	IC-VOLTAGE REGULATOR 5210, MSOP, 8P, 117MIL, PLASTIC,
1	1204-001542	U6	IC-DECODER STA013T, TQFP, 28P, -, PLASTIC, 3.6 V, 125M W, -
1	2007-000138	R45, R46, R47	R-CHIP 100 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000140	R15	R-CHIP 1 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000141	R39	R-CHIP 2.2 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000141	R6	R-CHIP 2.2 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000141	R7	R-CHIP 2.2 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000148	R25, R36, R41, R42	R-CHIP 10 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000152	R27	R-CHIP 20 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000153	R8, R9	R-CHIP 22 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000157	R37, R38	R-CHIP 47 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000159	R4, R5	R-CHIP 56 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R1, R2, R10, R11	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R12, R13, R19, R20	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R21, R22, R23, R24	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R26, R28, R29, R32	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R33, R50	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R34, R35	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000162	R44, R48	R-CHIP 100 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-000170	R3, R17	R-CHIP 1 Mohm, 5 %, 1/16 W, DA, TP, 1005


Level	SEC CODE	Design LOC	DESCRIPTIONS
1	2007-000172	R14, R16	R-CHIP 10 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-001325	R30, R31	R-CHIP 3.3 kohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-002970	R49	R-CHIP 56 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2007-007771	R18, C36	R-CHIP 0 ohm, 5 %, 1/16 W, DA, TP, 1005
1	2203-000233	C37, C38	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000233	C8	C-CERAMIC, CHIP 0.1 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000438	C12, C13, C23	C-CERAMIC, CHIP 1 nF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000438	C50	C-CERAMIC, CHIP 1 nF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000489	C42, C43	C-CERAMIC, CHIP 2.2 nF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000812	C49	C-CERAMIC, CHIP 0.033 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000885	C25	C-CERAMIC, CHIP 4.7 nF, 10 %, 25 V, X7R, TP, 1005, -
1	2203-000940	C19, C24	C-CERAMIC, CHIP 470 pF, 10 %, 50 V, X7R, TP, 1005, -
1	2203-000995	C26, C27	C-CERAMIC, CHIP 0.047 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-000995	C9	C-CERAMIC, CHIP 0.047 nF, 5 %, 50 V, NP0, TP, 1005
1	2203-002443	C15	C-CERAMIC, CHIP 0.33 nF, 10 %, 50 V, X7R, TP, 1005
1	2203-005061	C1, C2, C5, C6	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C22, C28, C30, C31, C34	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C35, C44, C47	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2203-005061	C7, C10, C11, C20, C21	C-CERAMIC, CHIP 100 nF, +80-20 %, 16 V, Y5 V, TP, 1005
1	2404-001088	C14	C-TA, CHIP 2.2 uF, 20 %, 6.3 V, GP, TP, 2012, -
1	2404-001101	C39	C-TA, CHIP 1 uF, 20 %, 16 V, GP, TP, 2012, -
1	2404-001101	C40, C41	C-TA, CHIP 1 uF, 20 %, 16 V, GP, TP, 2012, -
1	2404-001105	C18, C29, C45	C-TA, CHIP 10 uF, 20 %, 6.3 V, GP, TP, 2012
1	2404-001105	C3, C4, C16, C17	C-TA, CHIP 10 uF, 20 %, 6.3 V, GP, TP, 2012
1	2703-000125	L1	INDUCTOR-SMD 10uH, 10 %, 1.25 x 2 x 1.25 mm
1	2801-003833	X1	CRYSTAL-SMD 14.7456 MHz, 20 ppm, 28-ACF, 20PF, 30 ohm,
1	2801-003899	X2	CRYSTAL-SMD 13.5168 MHz, 20 ppm, 28-ACF, 20 pF, 40 ohm,
1	3711-004509	J1	CONNECTOR-HEADER BOX, 40P, 2R, 0.5 mm, SMD-S, AUF
1	GH09-00001A	U7	IC MICRO COMPUTER-MP3 MICOM SCH-M210,
1	GH41-00106A		PCB-SGHM100 MP3 KEY SGH-M100, FR-4, 3L, -, 0.7T, 118 x
1	GH59-00092A	VOLUME KEY	UNIT-SGHM100VOL KEY ASS'Y SGH-M100, KBSGHM100,
1	GH59-00101A	METAL DOME	UNIT-SGHM100 METAL DOME SGH-M100, SGH-M100, -,

4. PCB Diagrams

4-1 SGH-M100 Main PCB Top Diagram

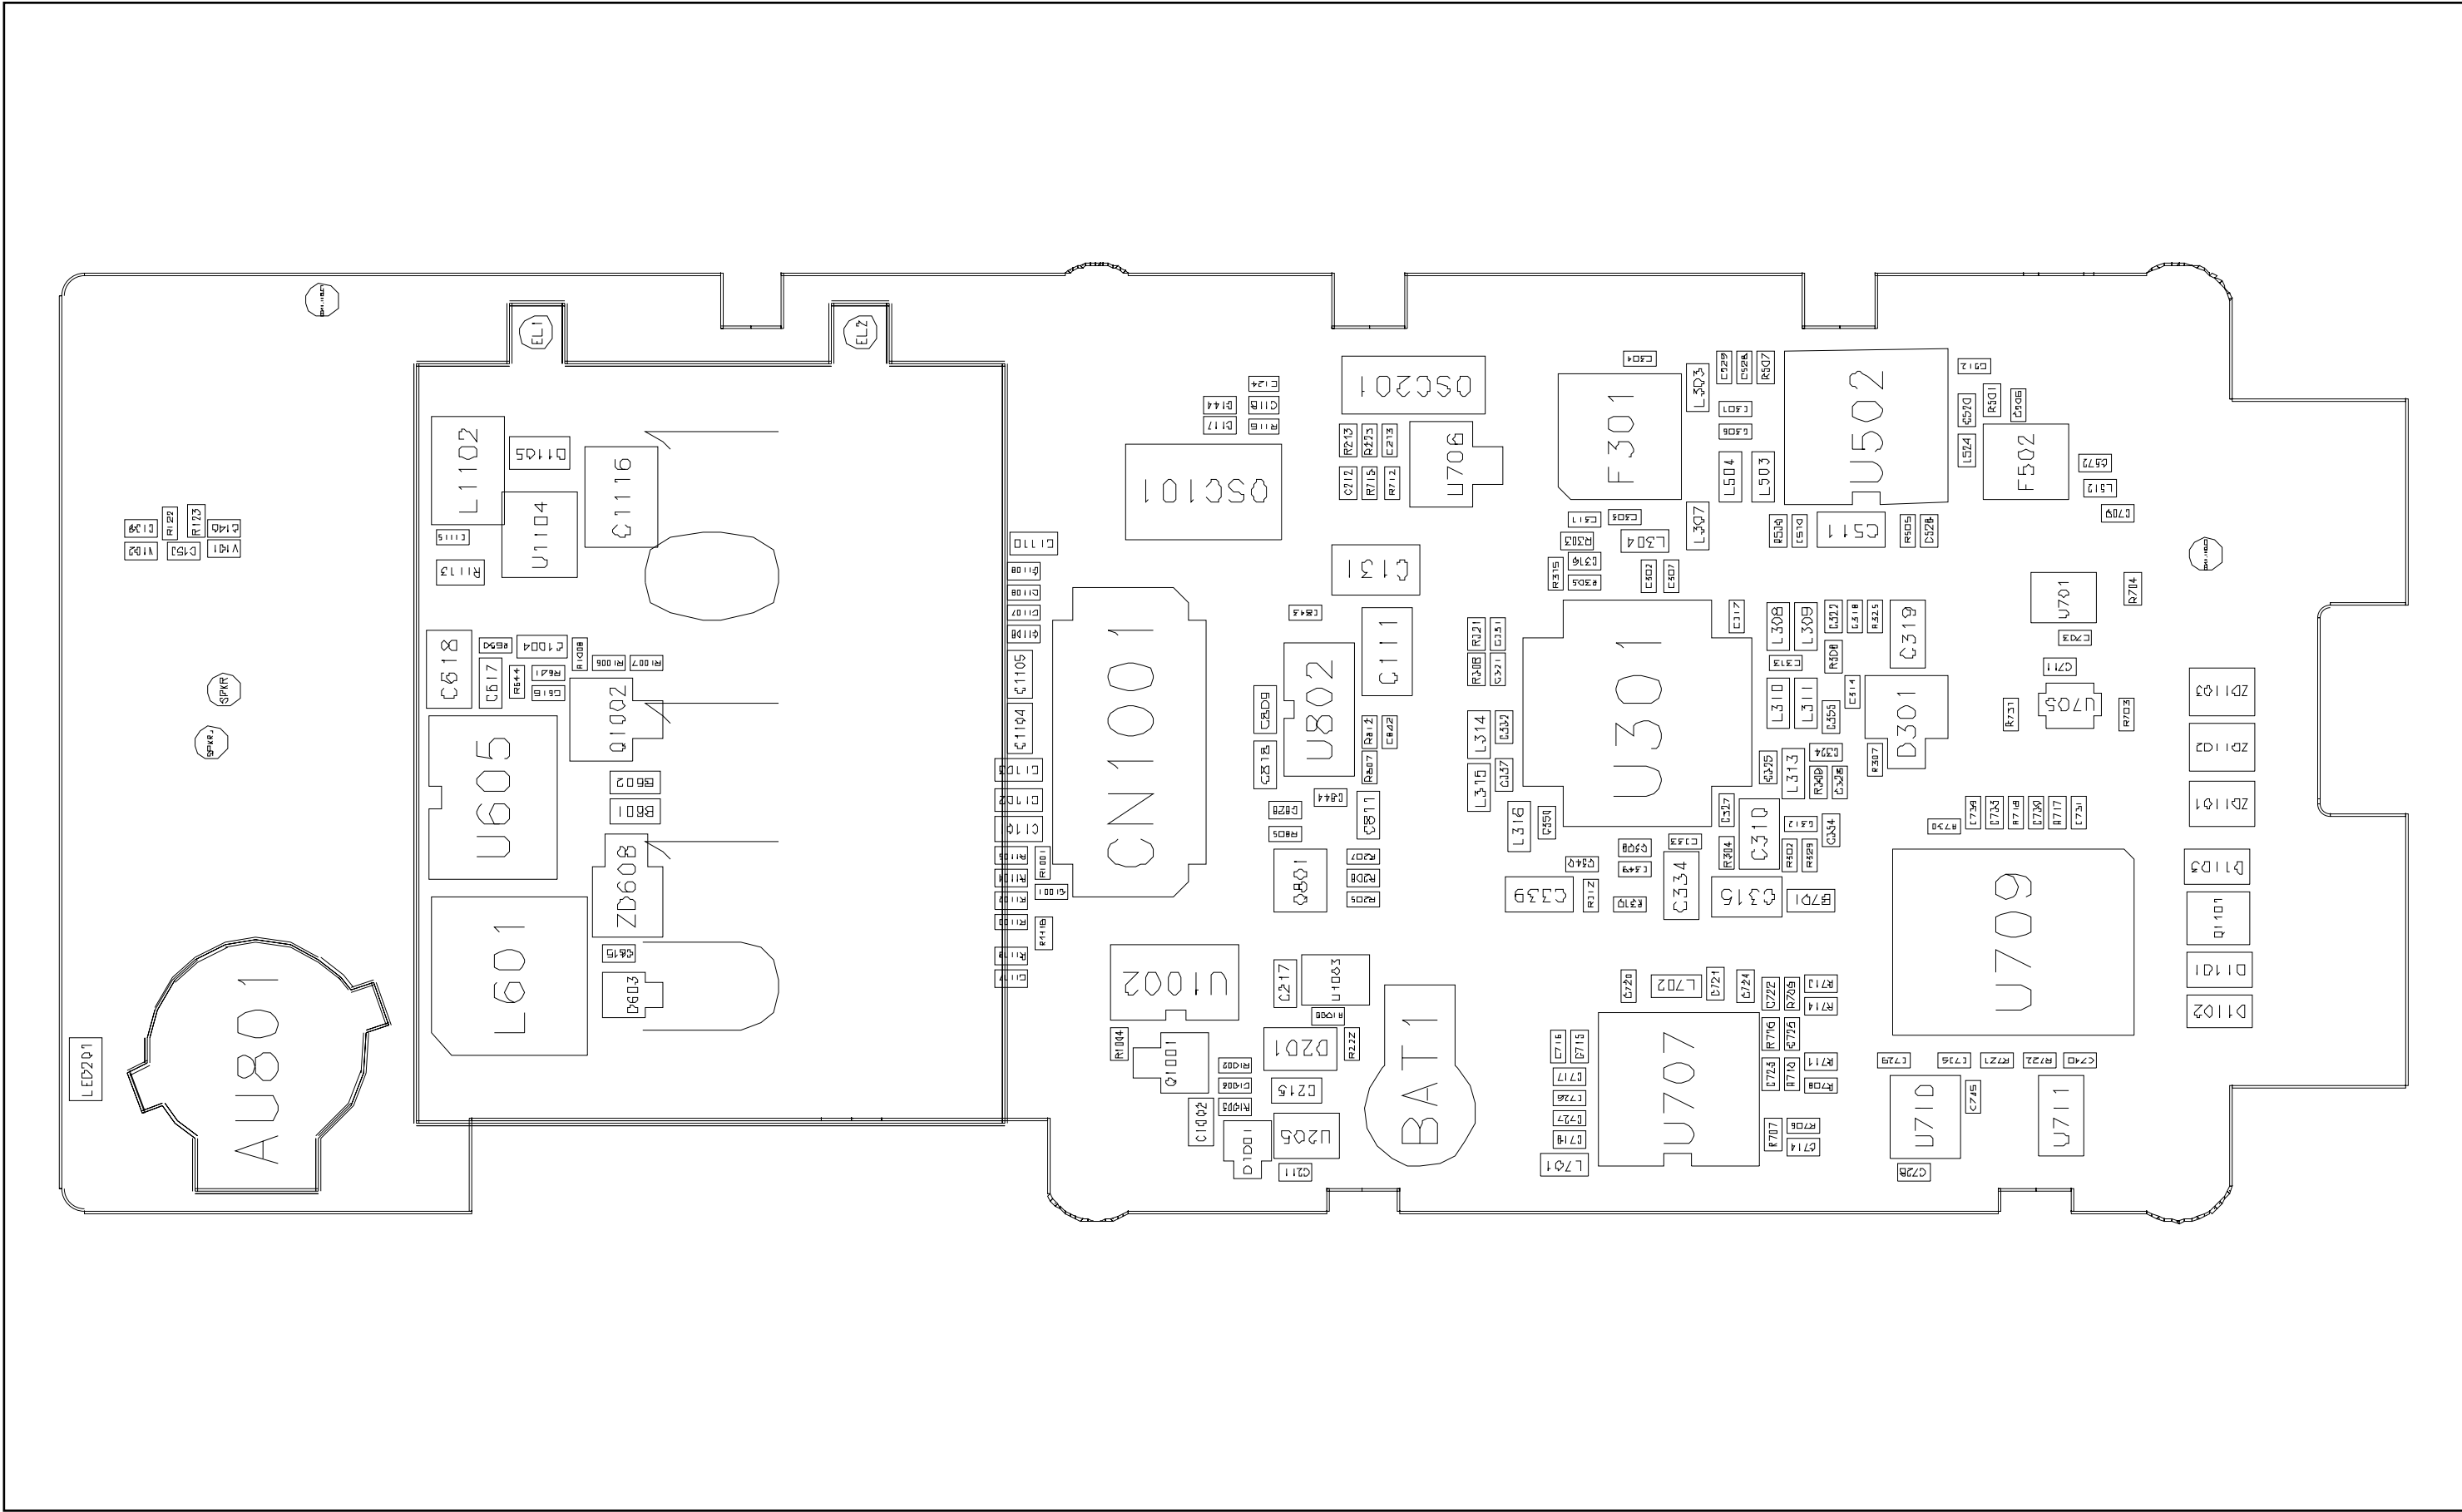


4-3 SGH-M100 MP3 Diagram

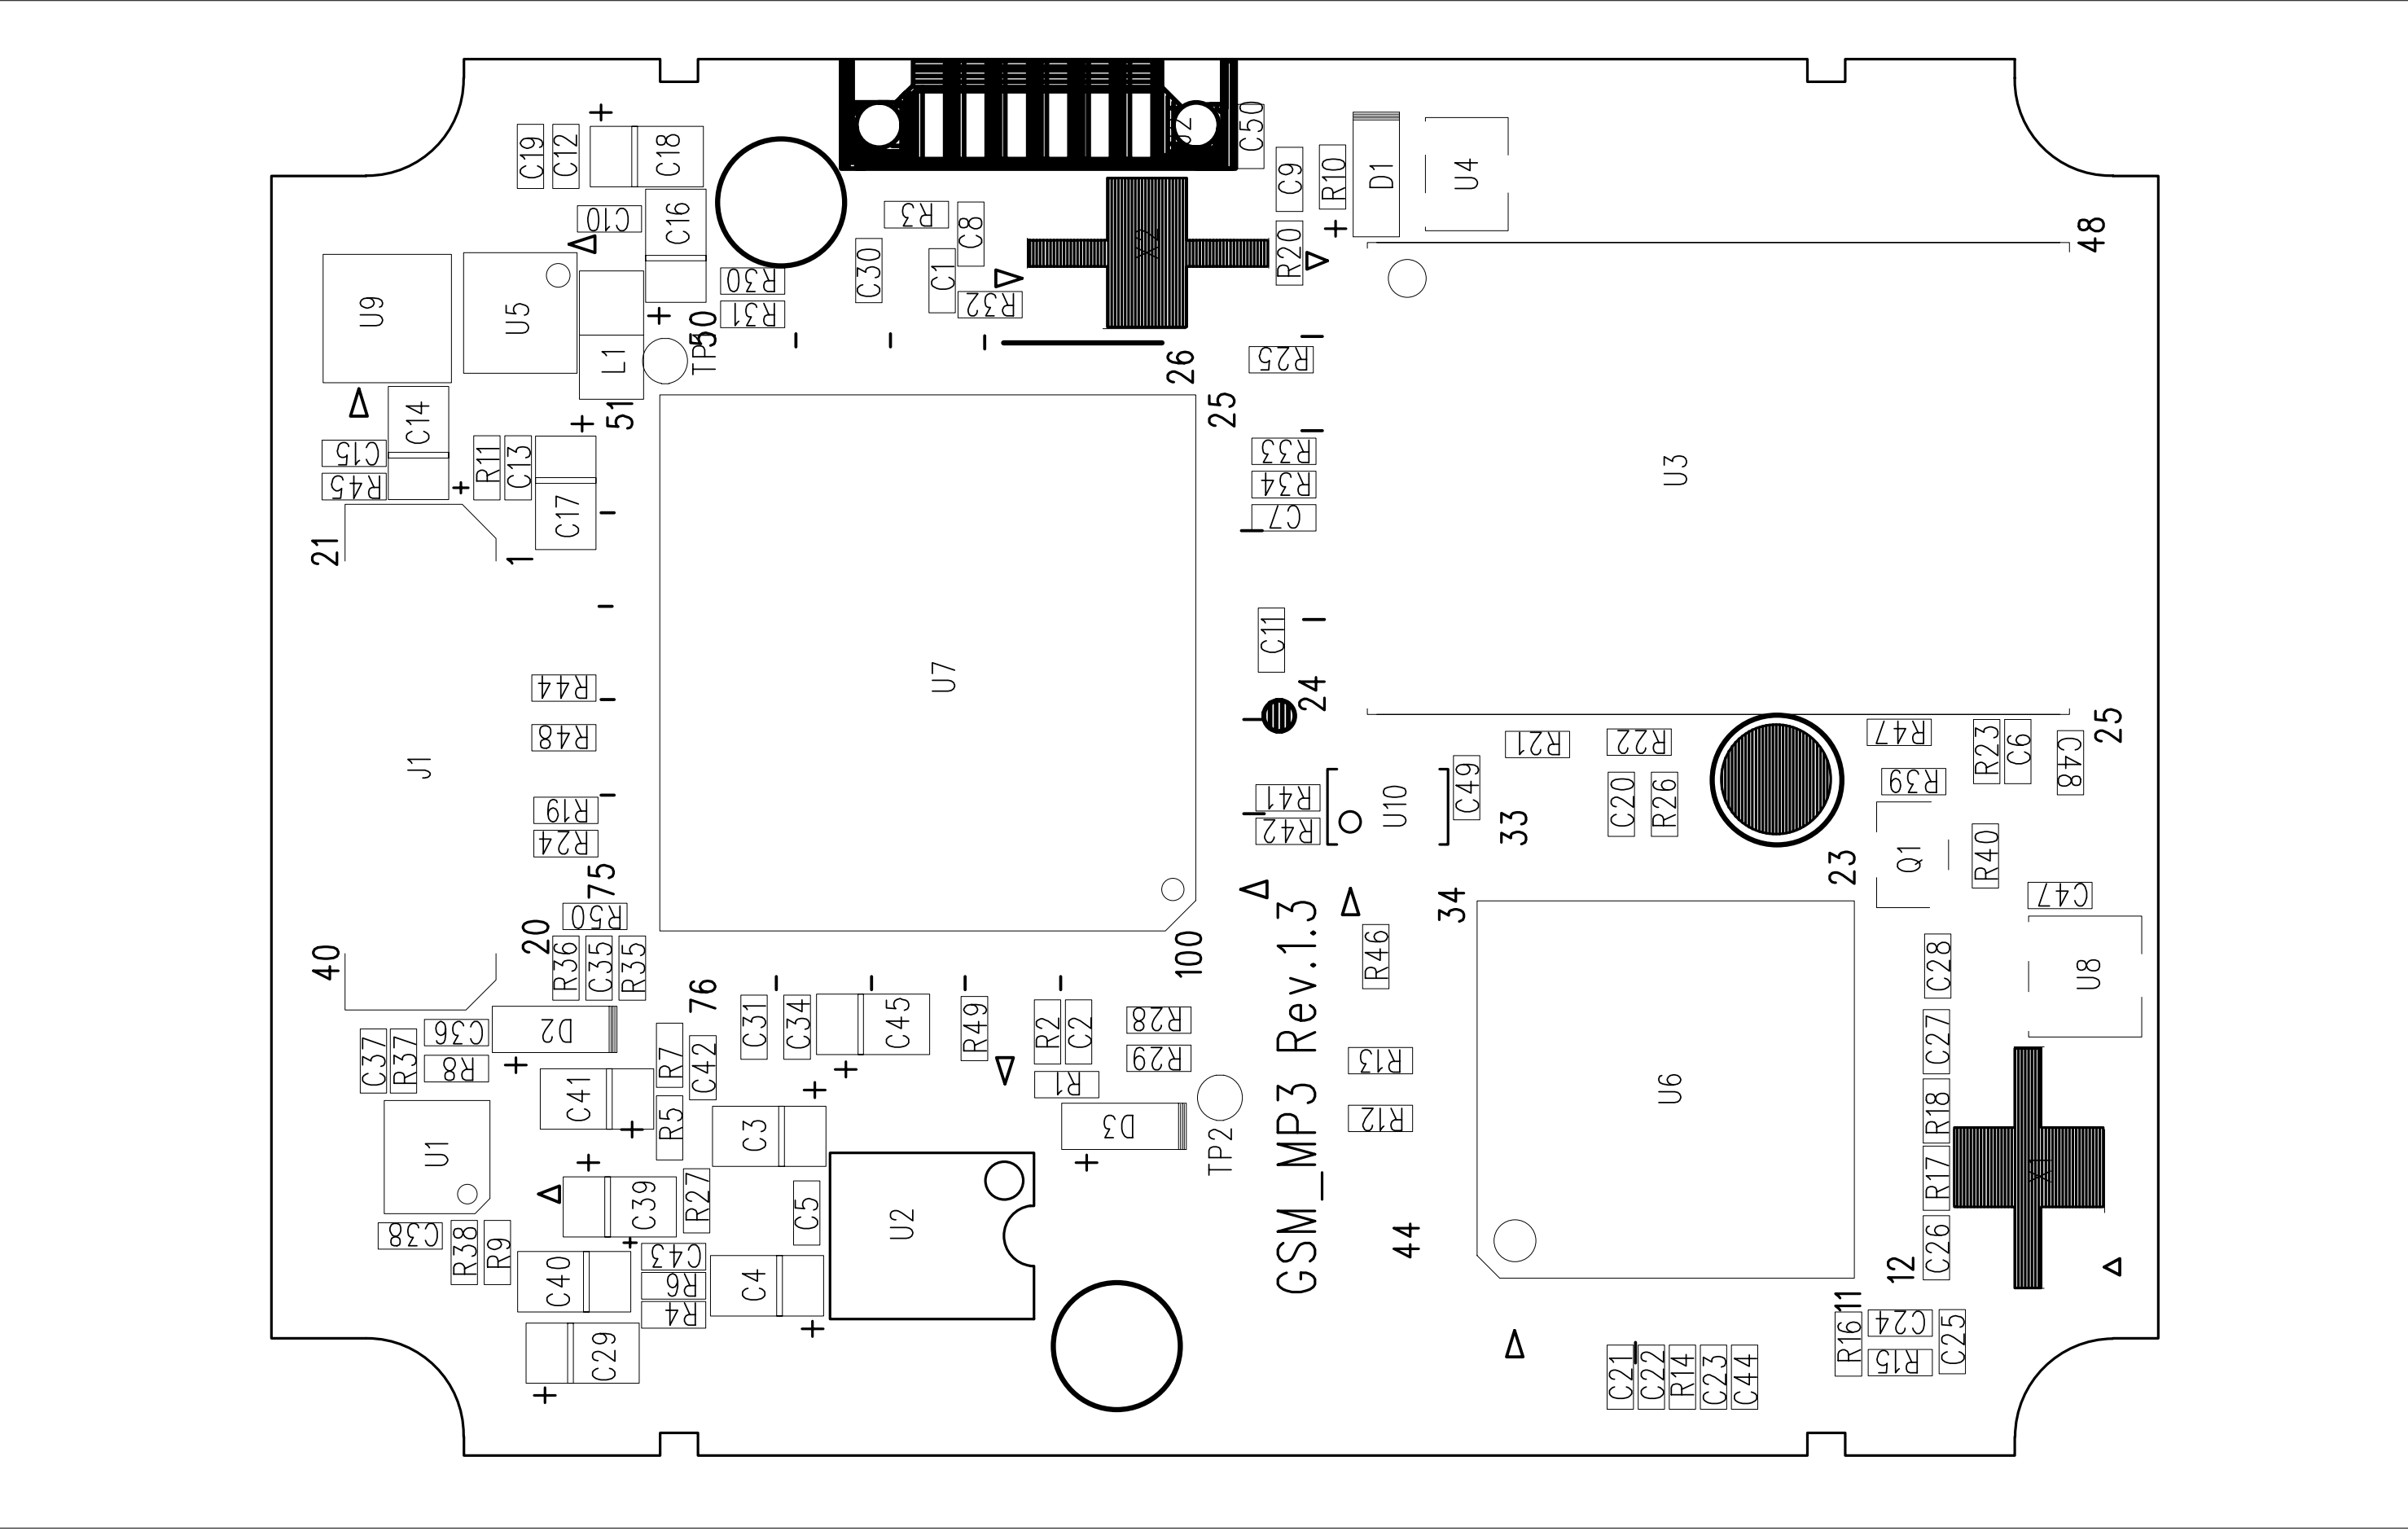


5. Circuit Diagrams


5-1 SGH-M100 Intergrated Analog Circuit Diagram

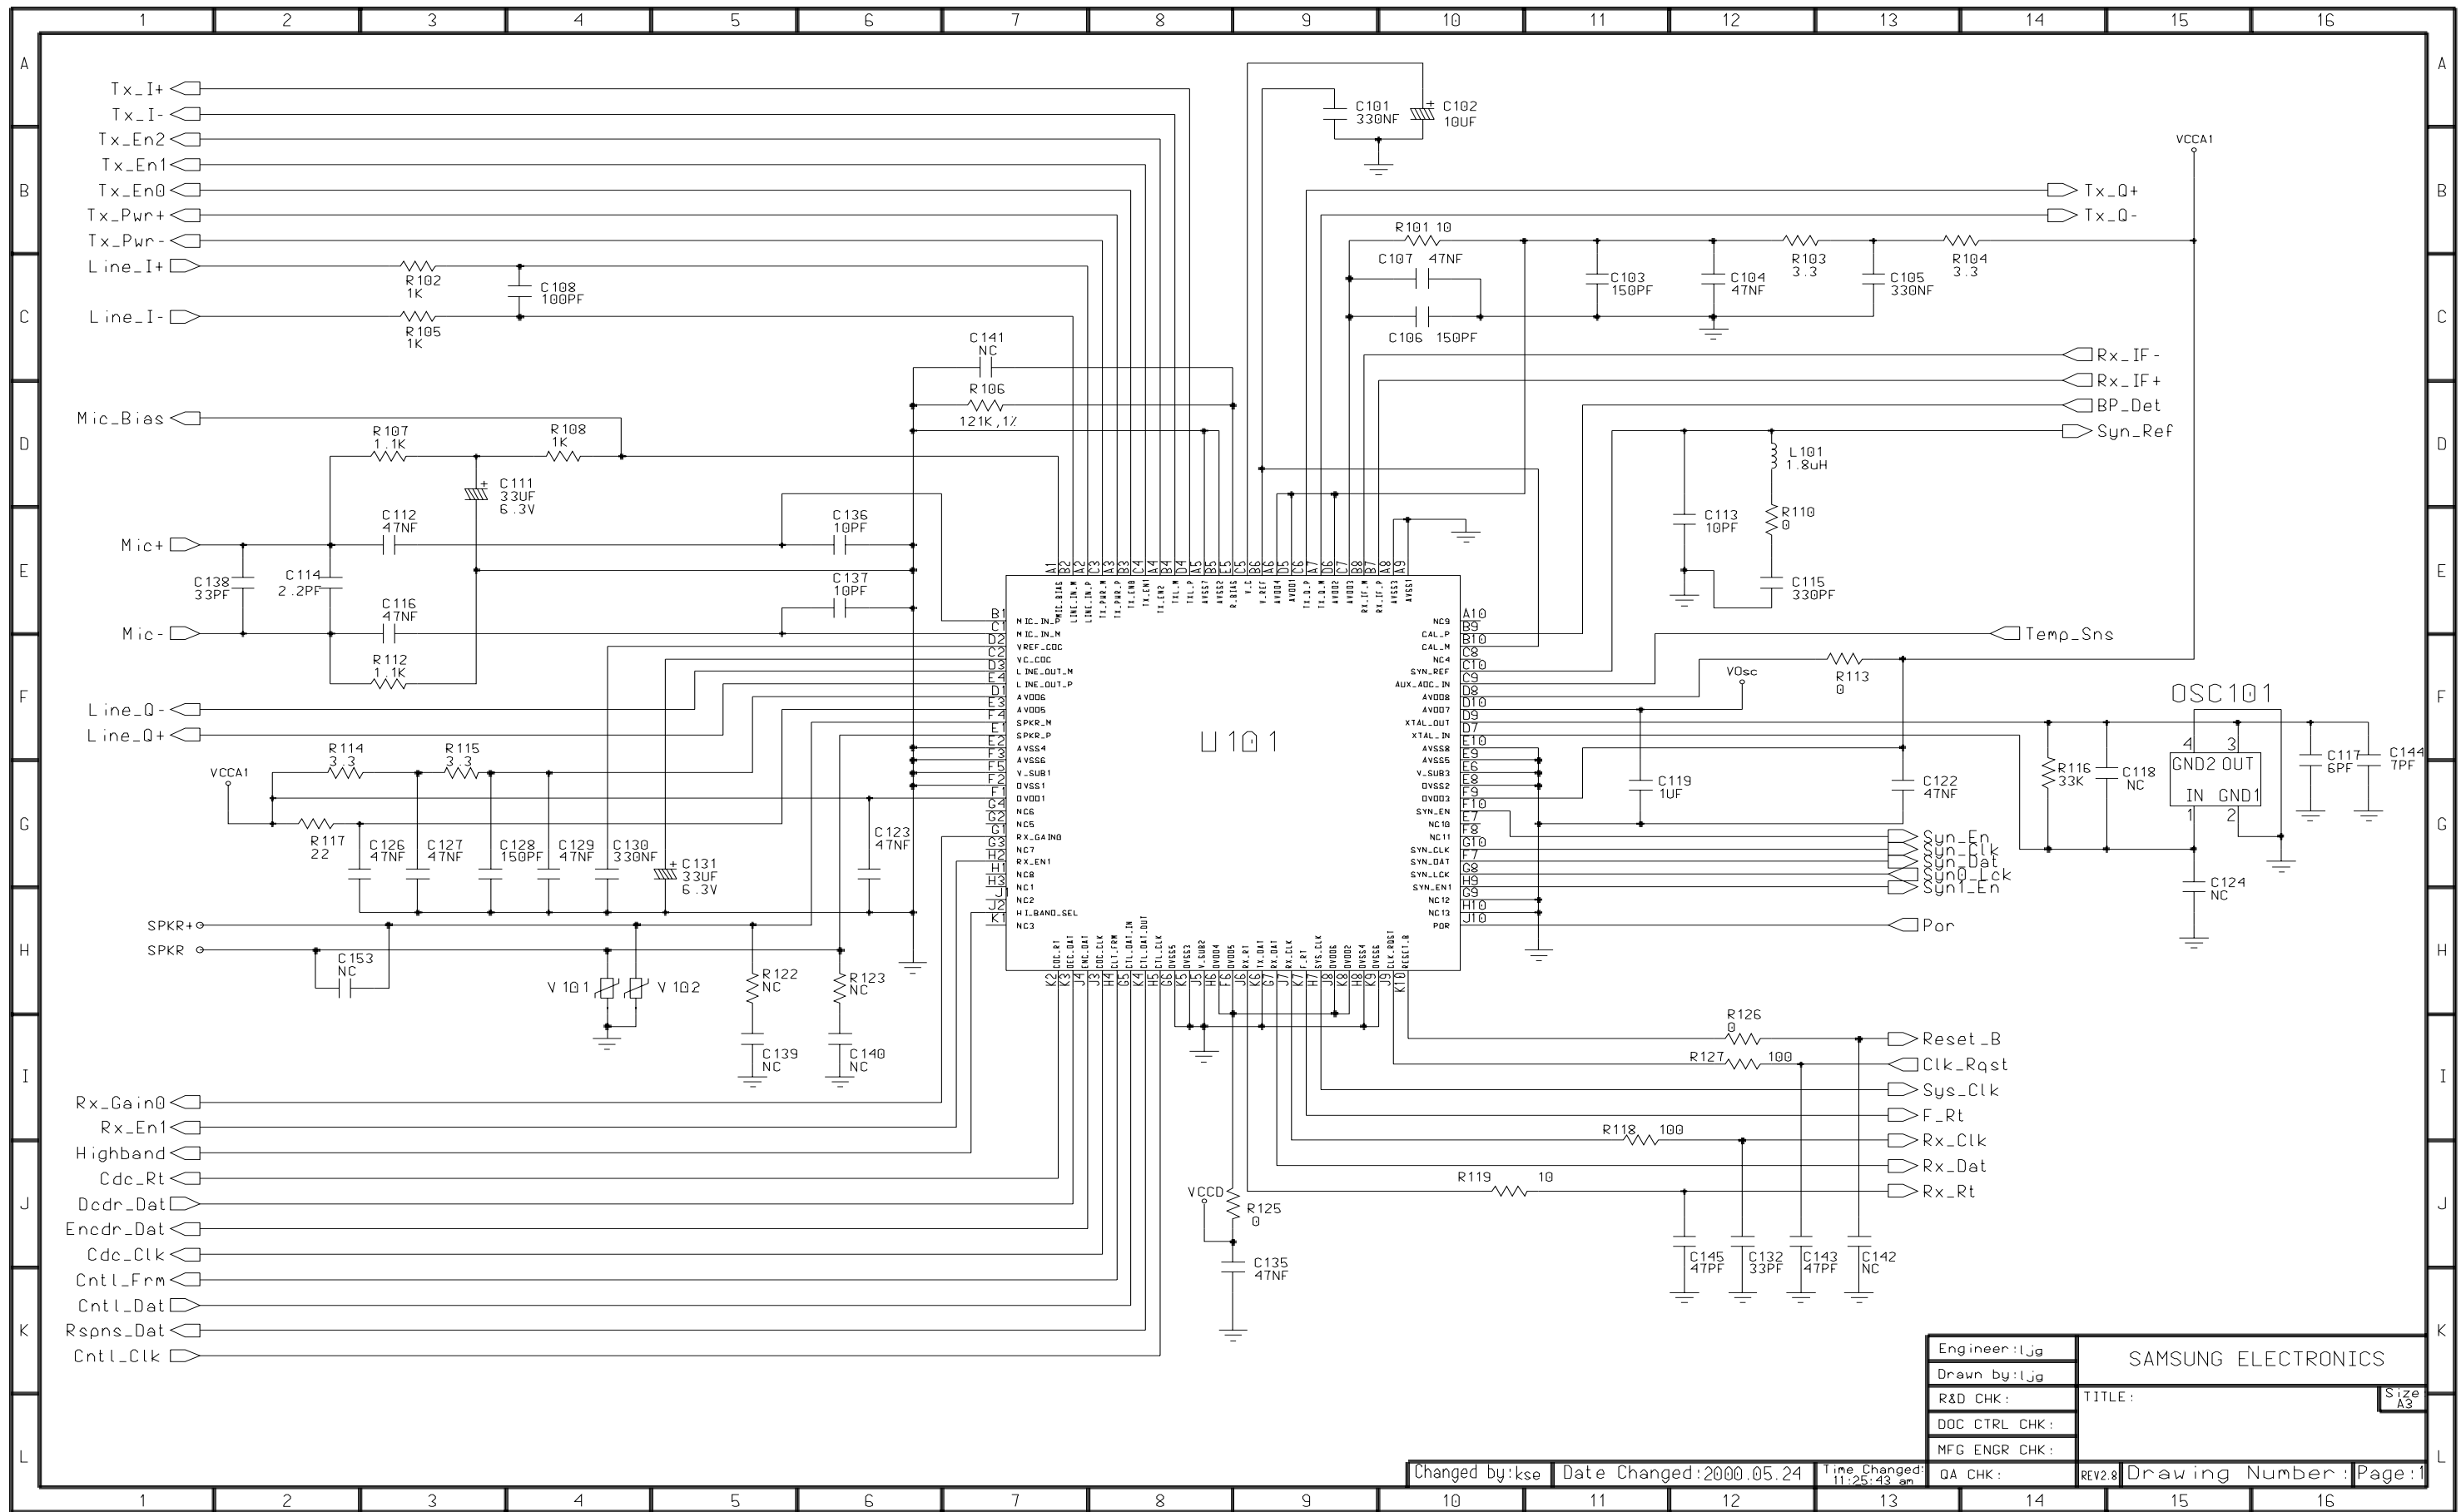


5-2 SGH-M100 I/F Connector & LCD Circuit Diagram

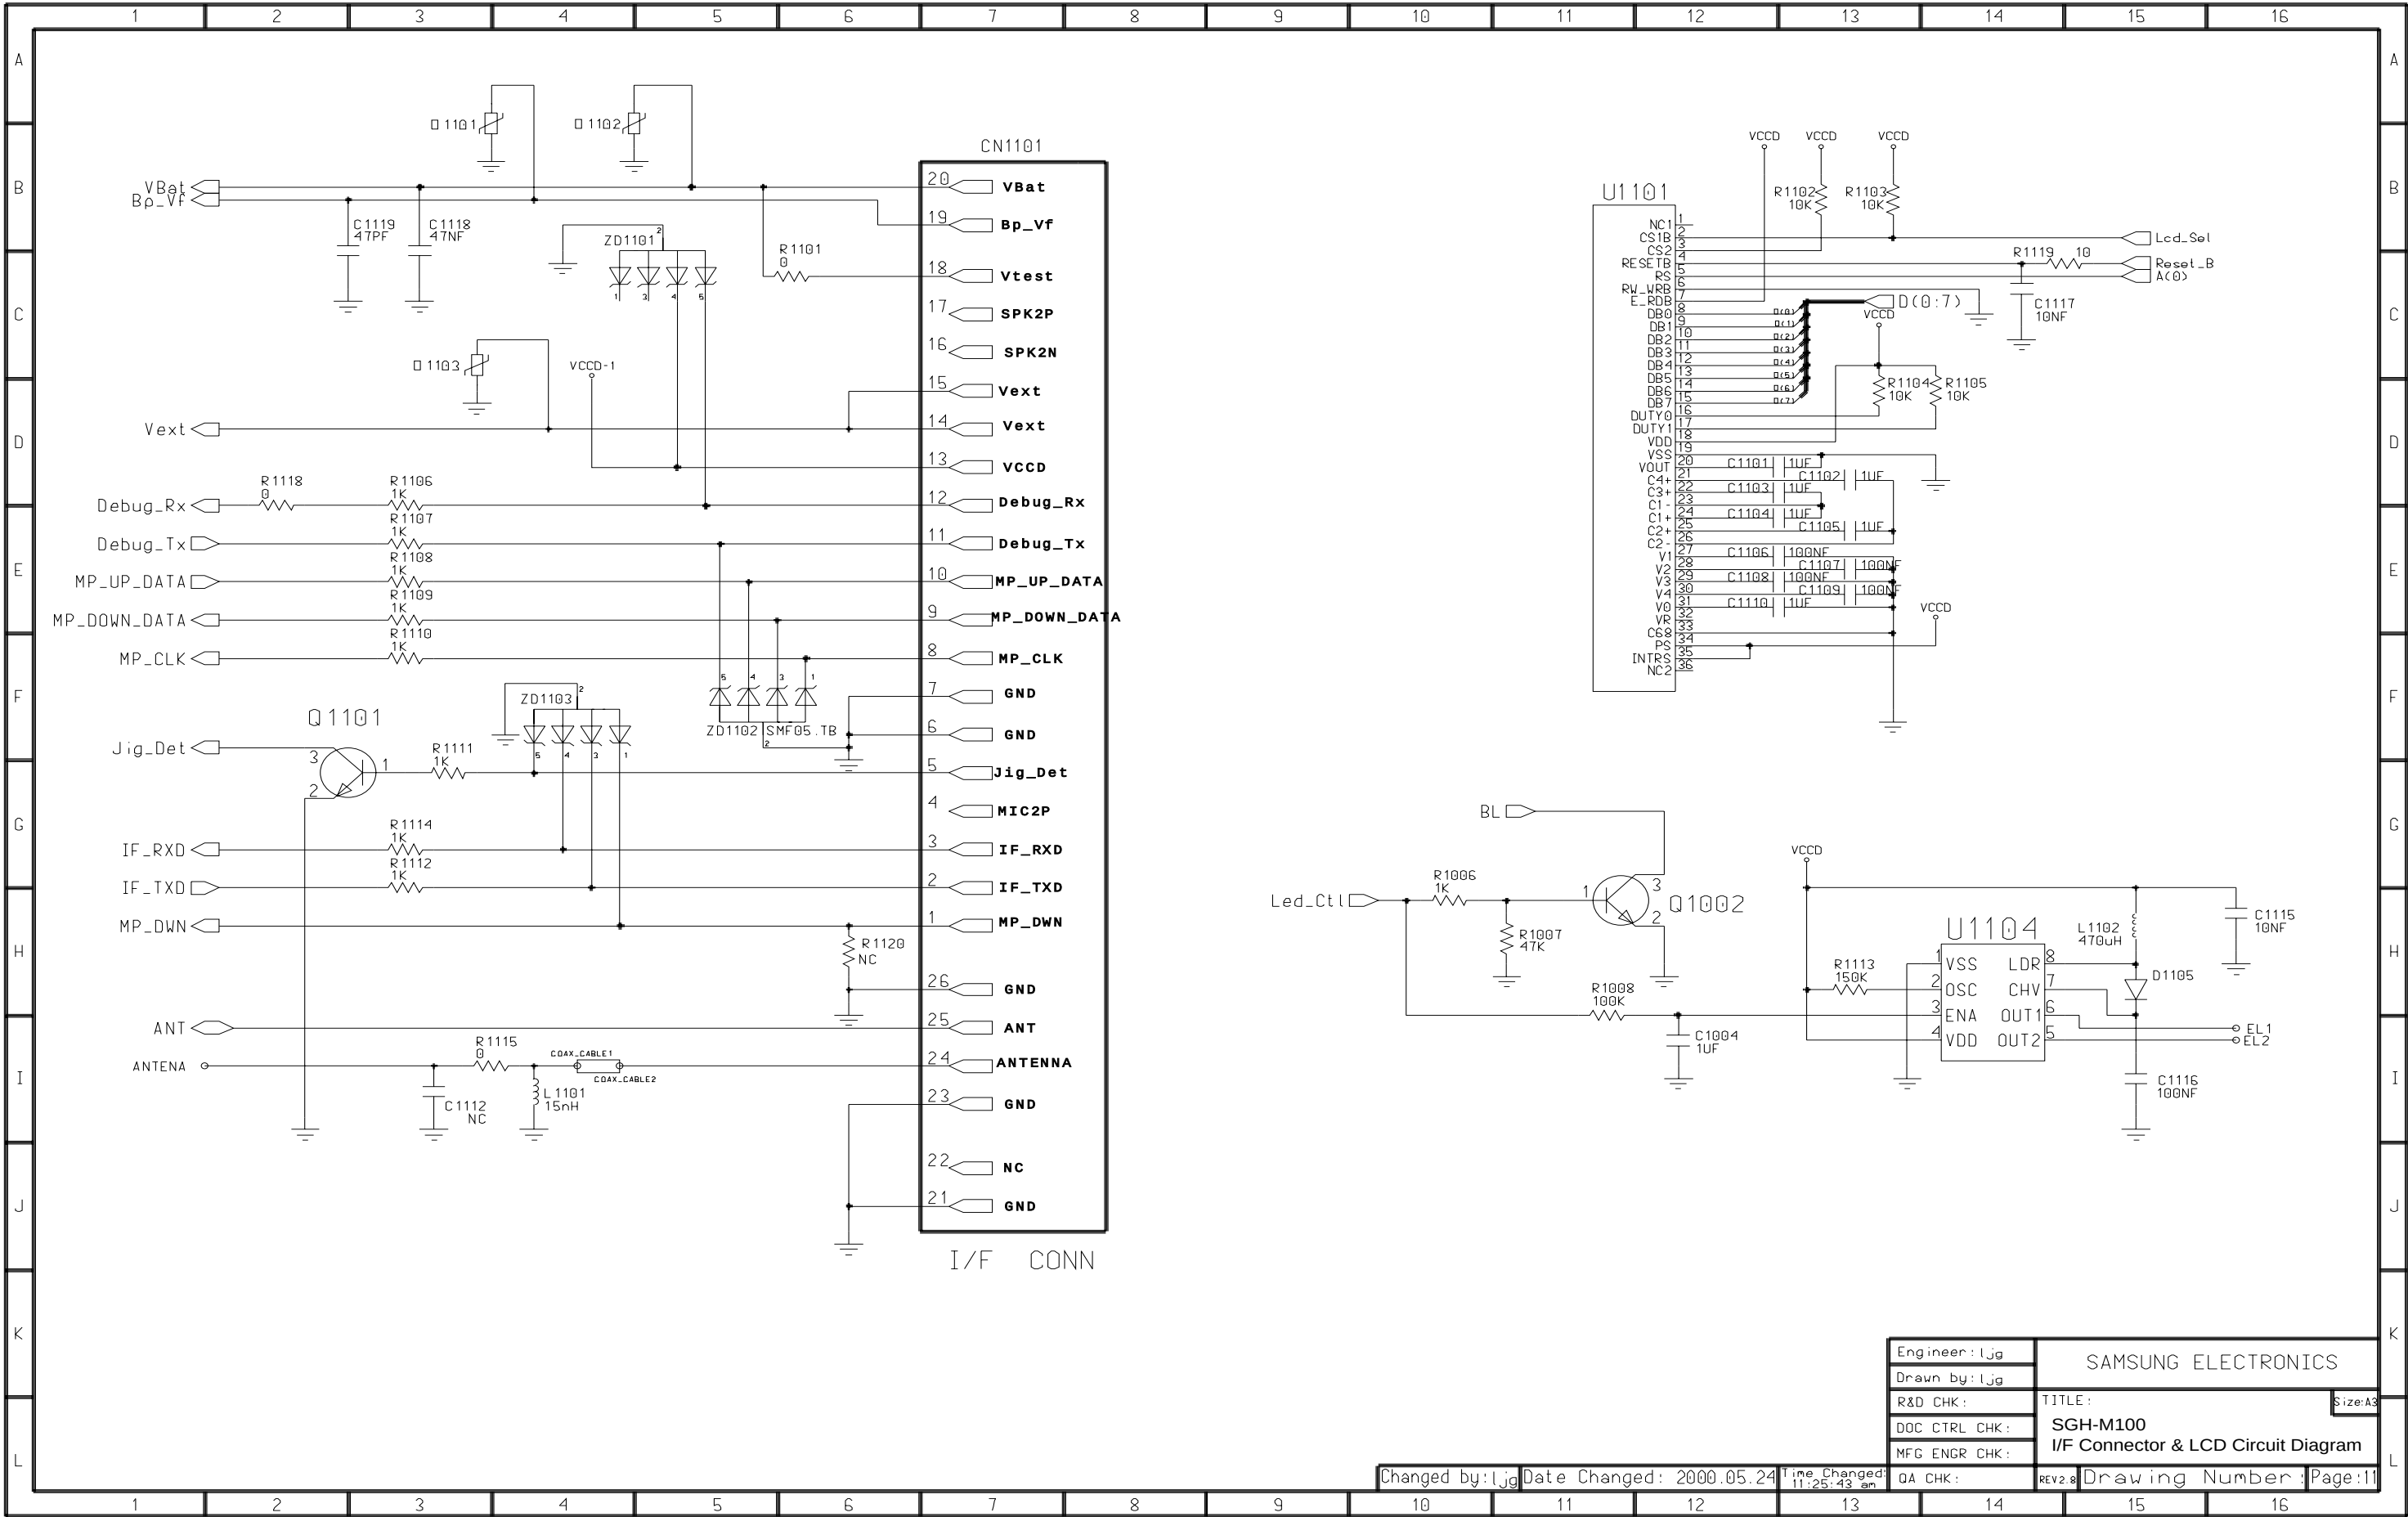


5-3 SGH-M100 B'd-to-B'dConnector Circuit Diagram

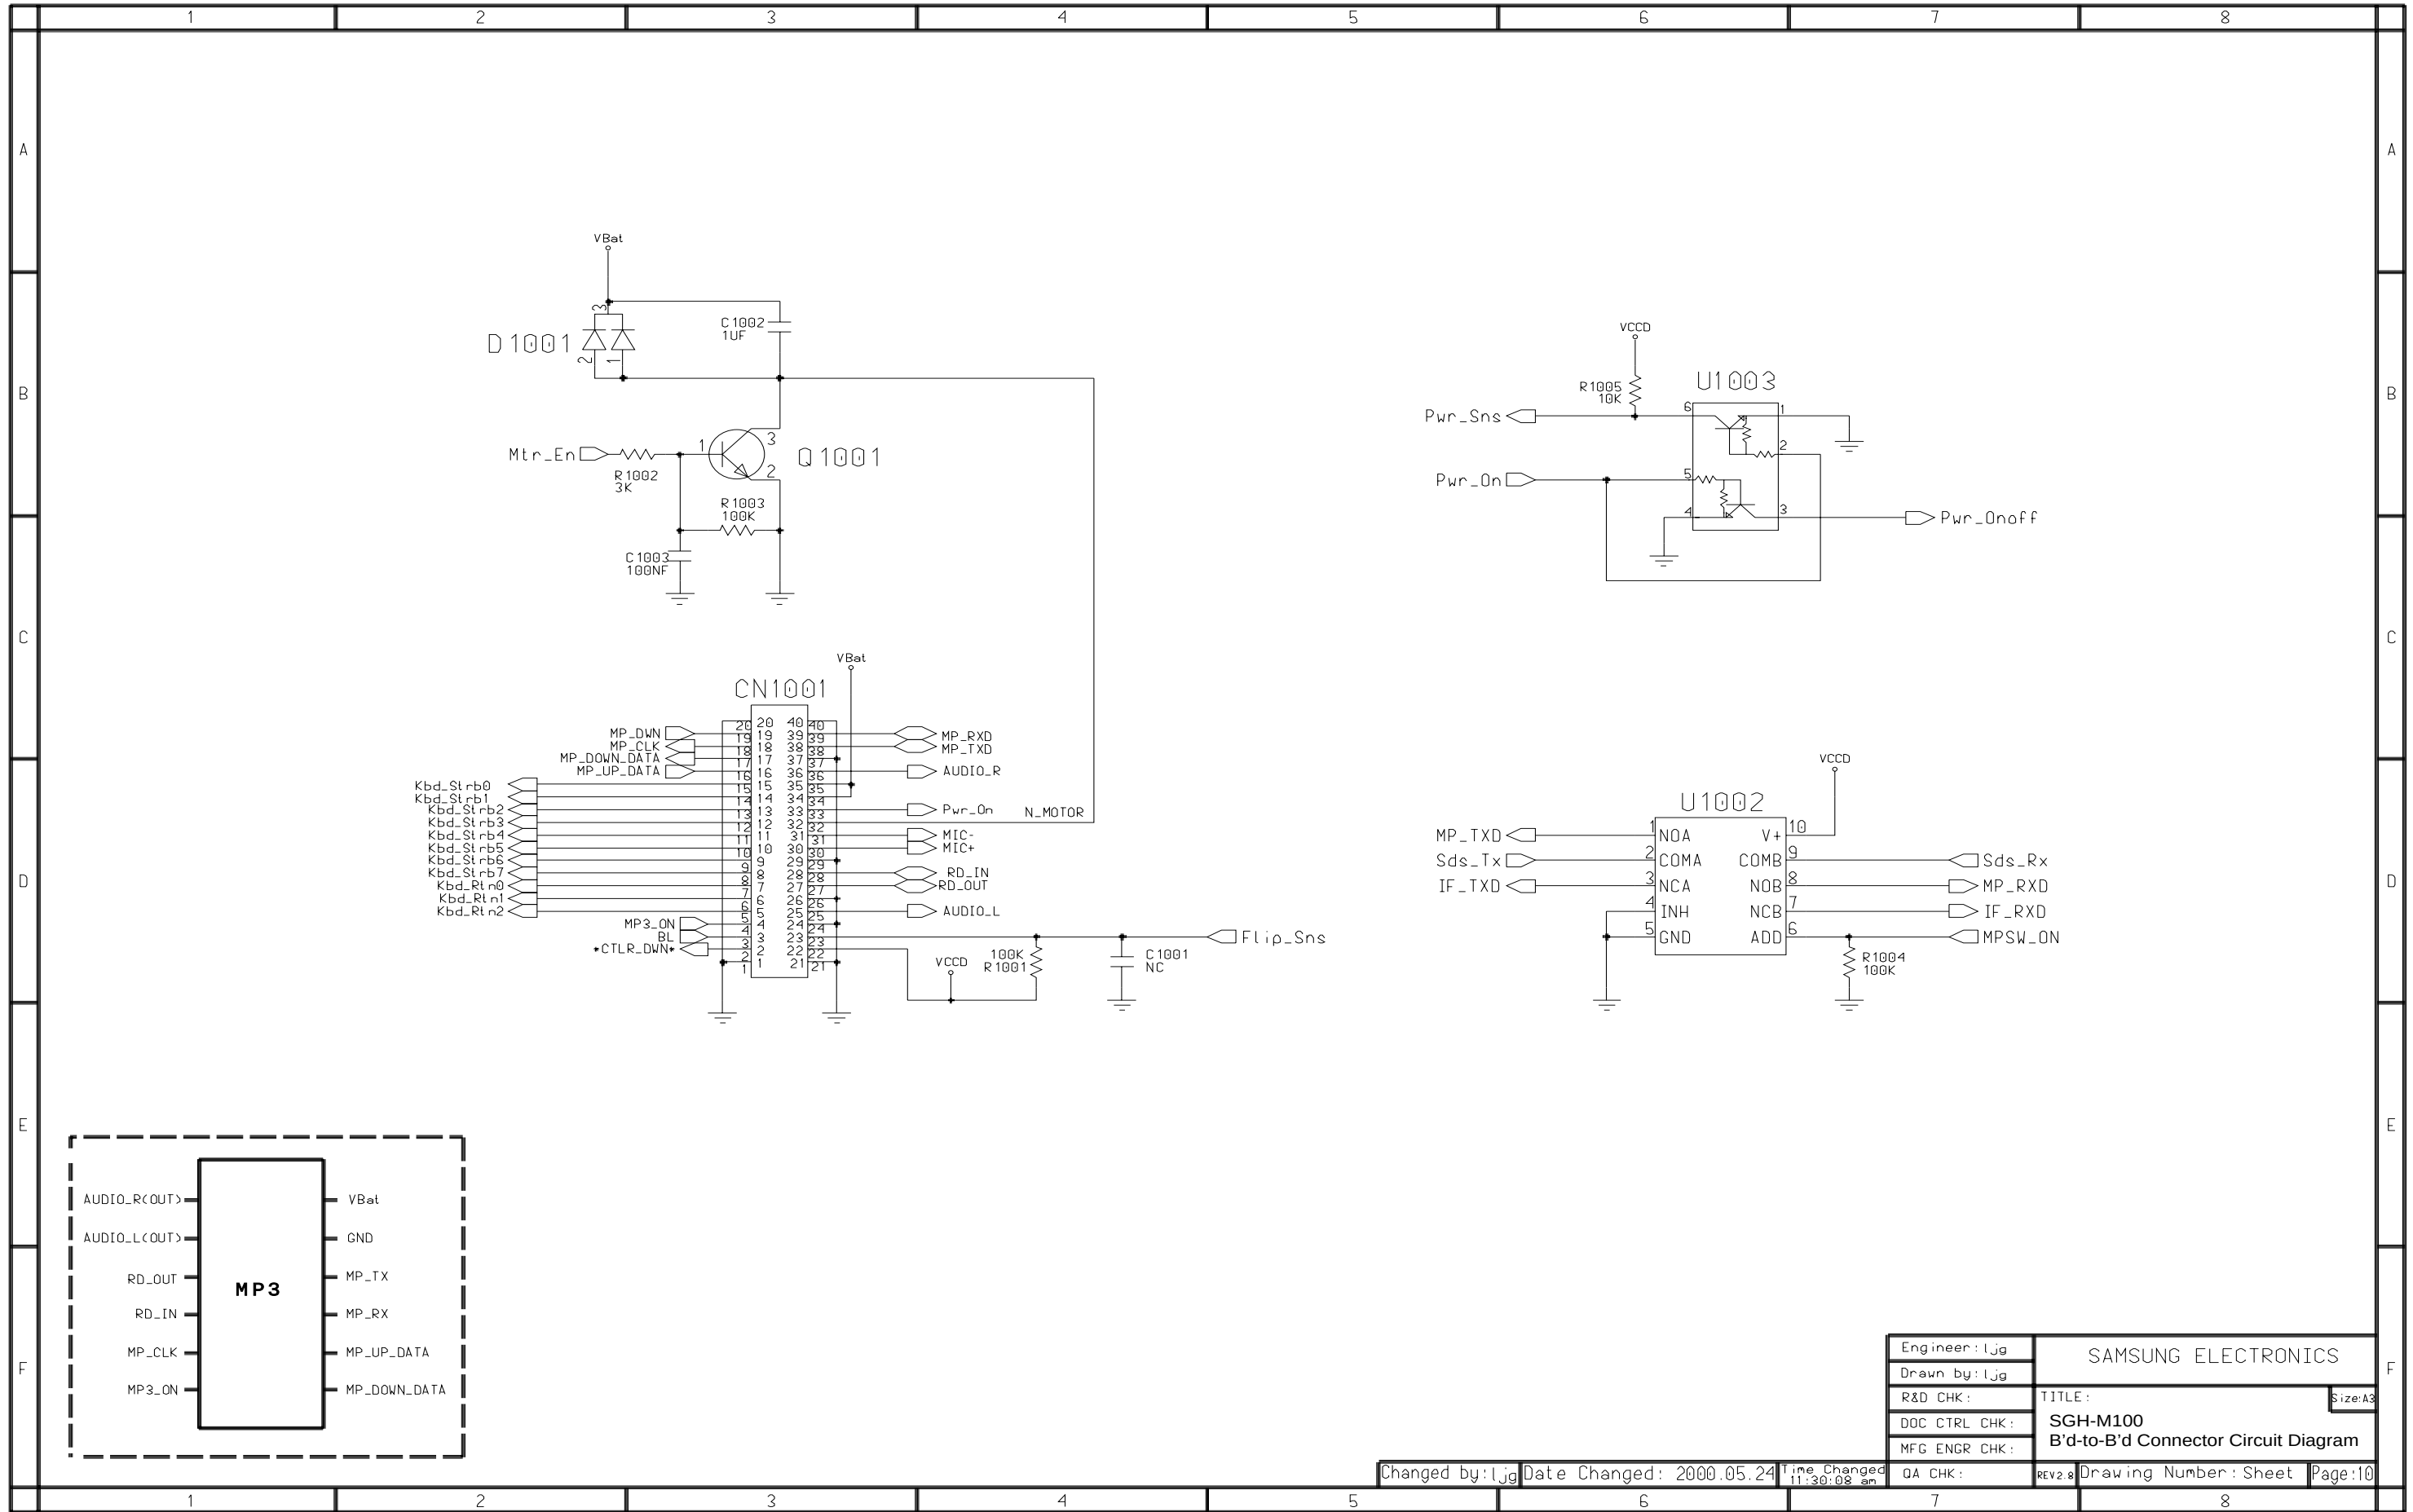





5-5 SGH-M100 Dual Synthesizer + Transceiver Circuit Diagram

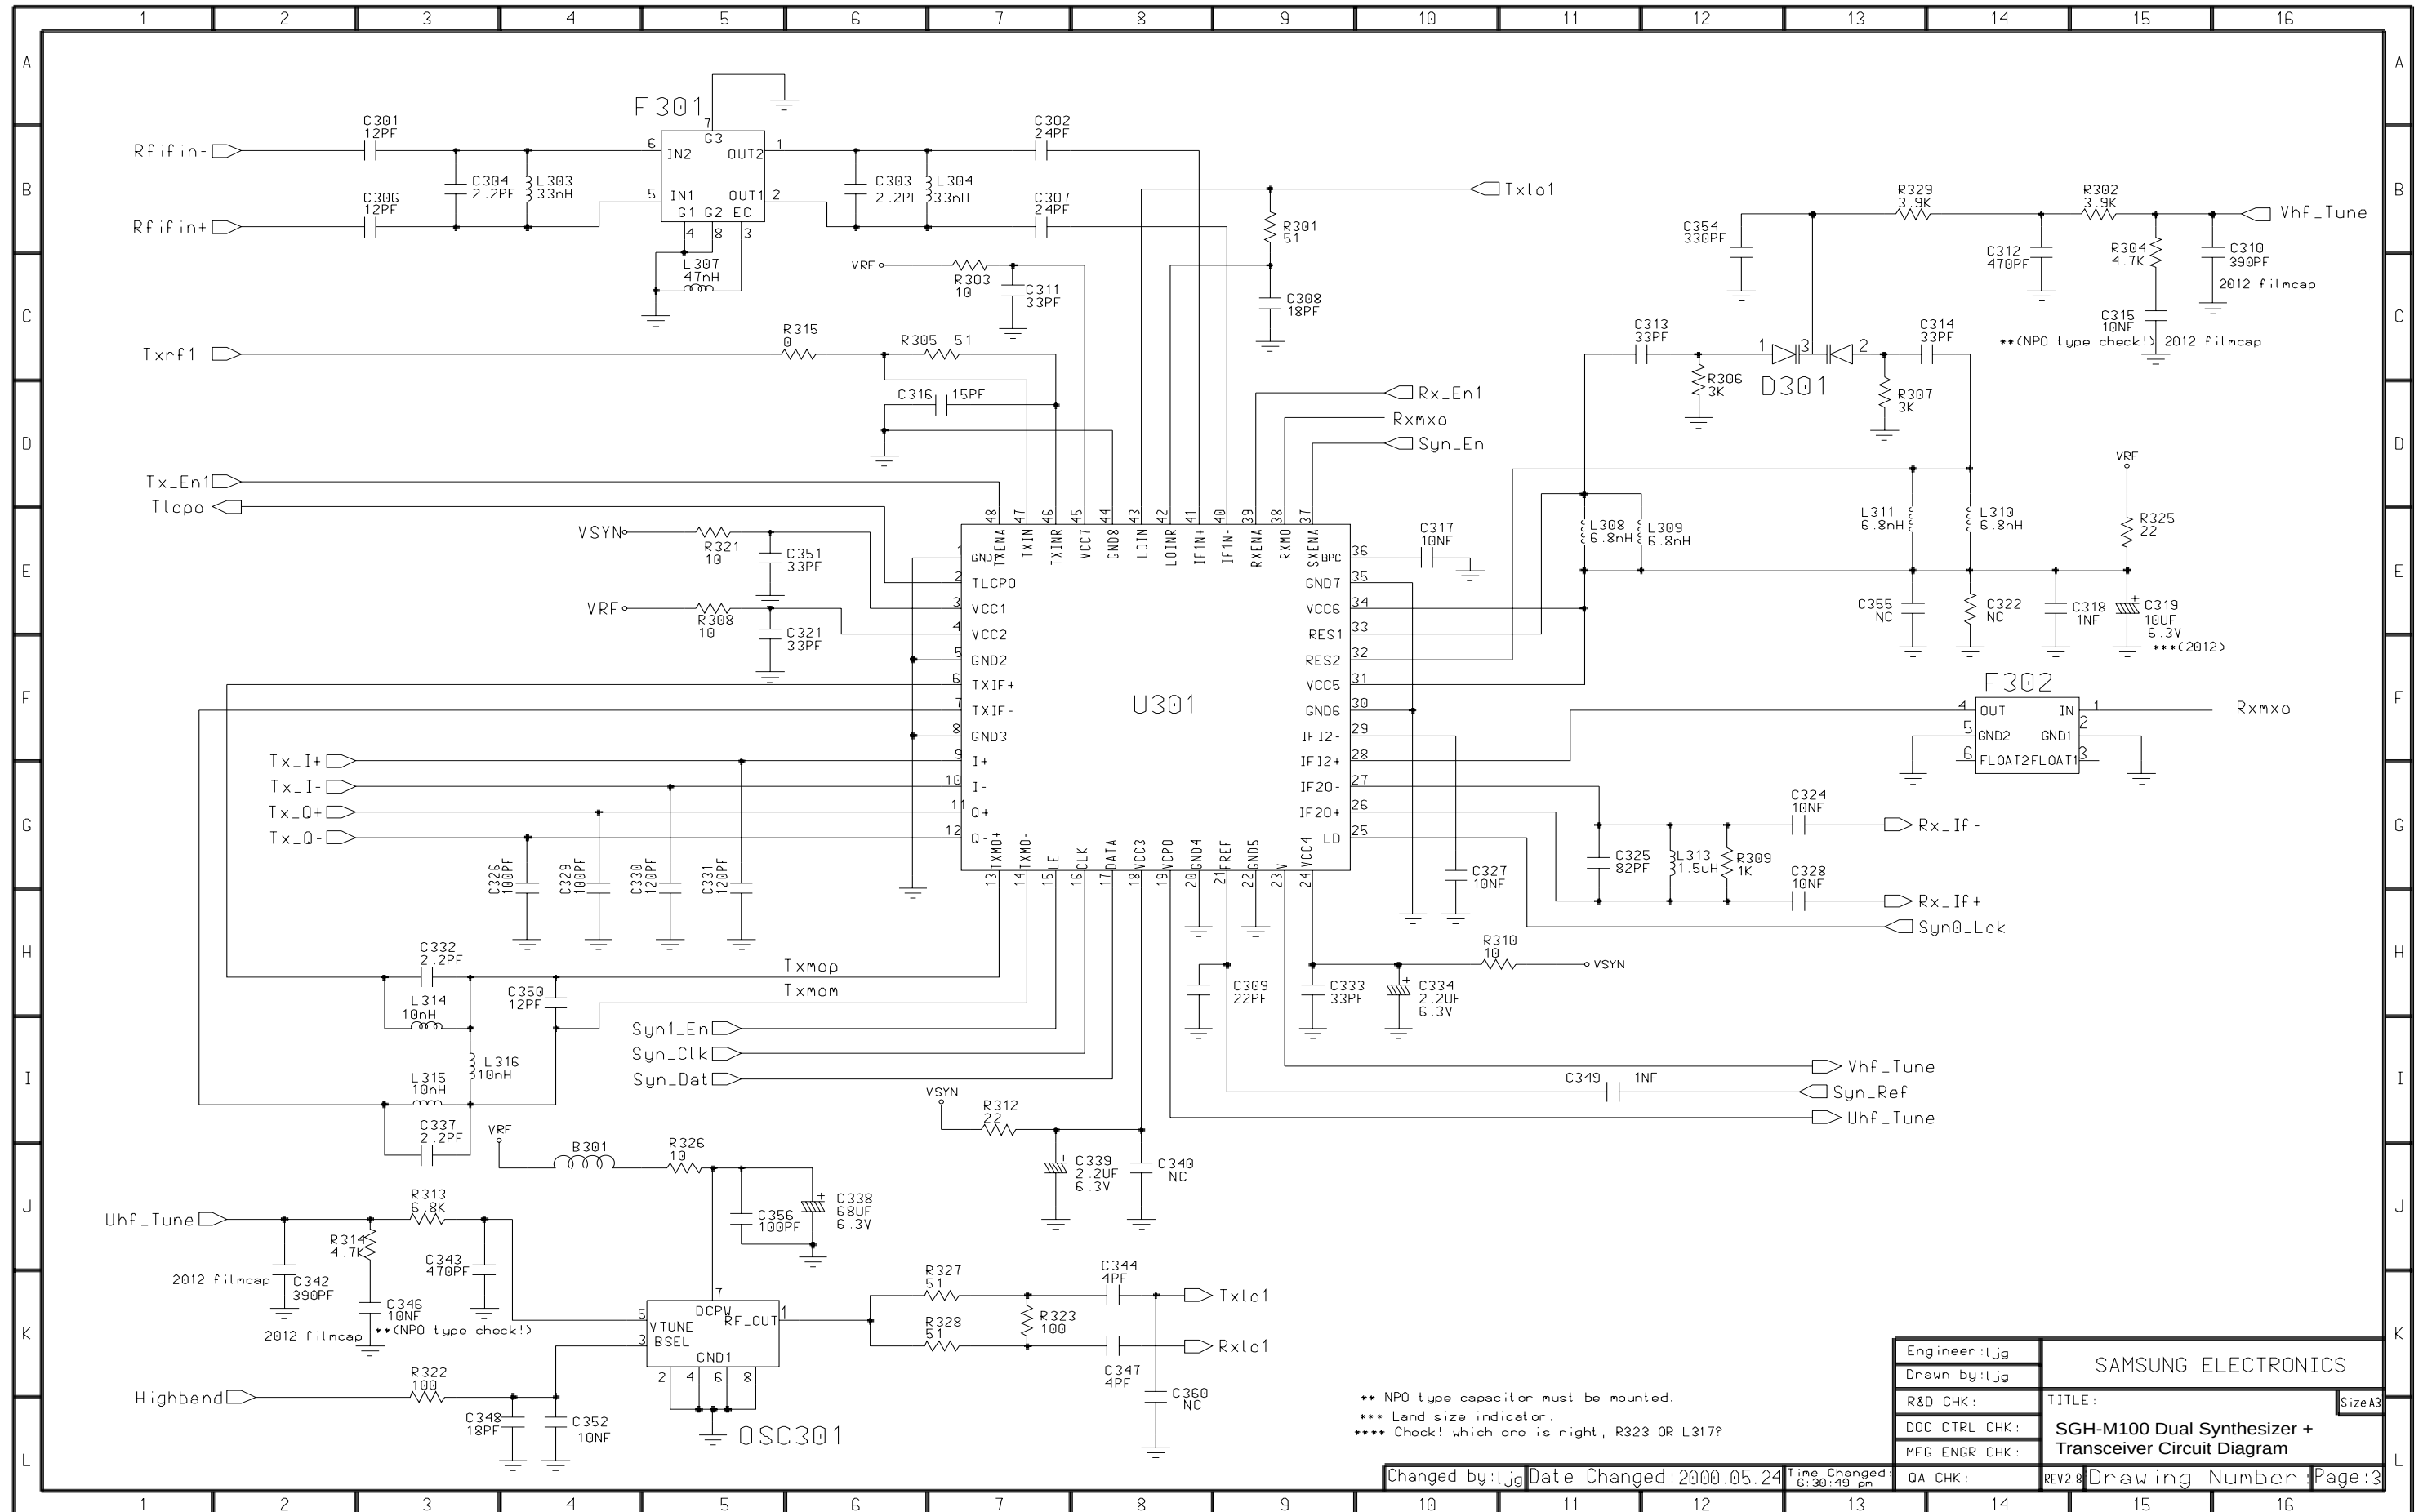


5-6 SGH-M100 Power Management Circuit Diagram

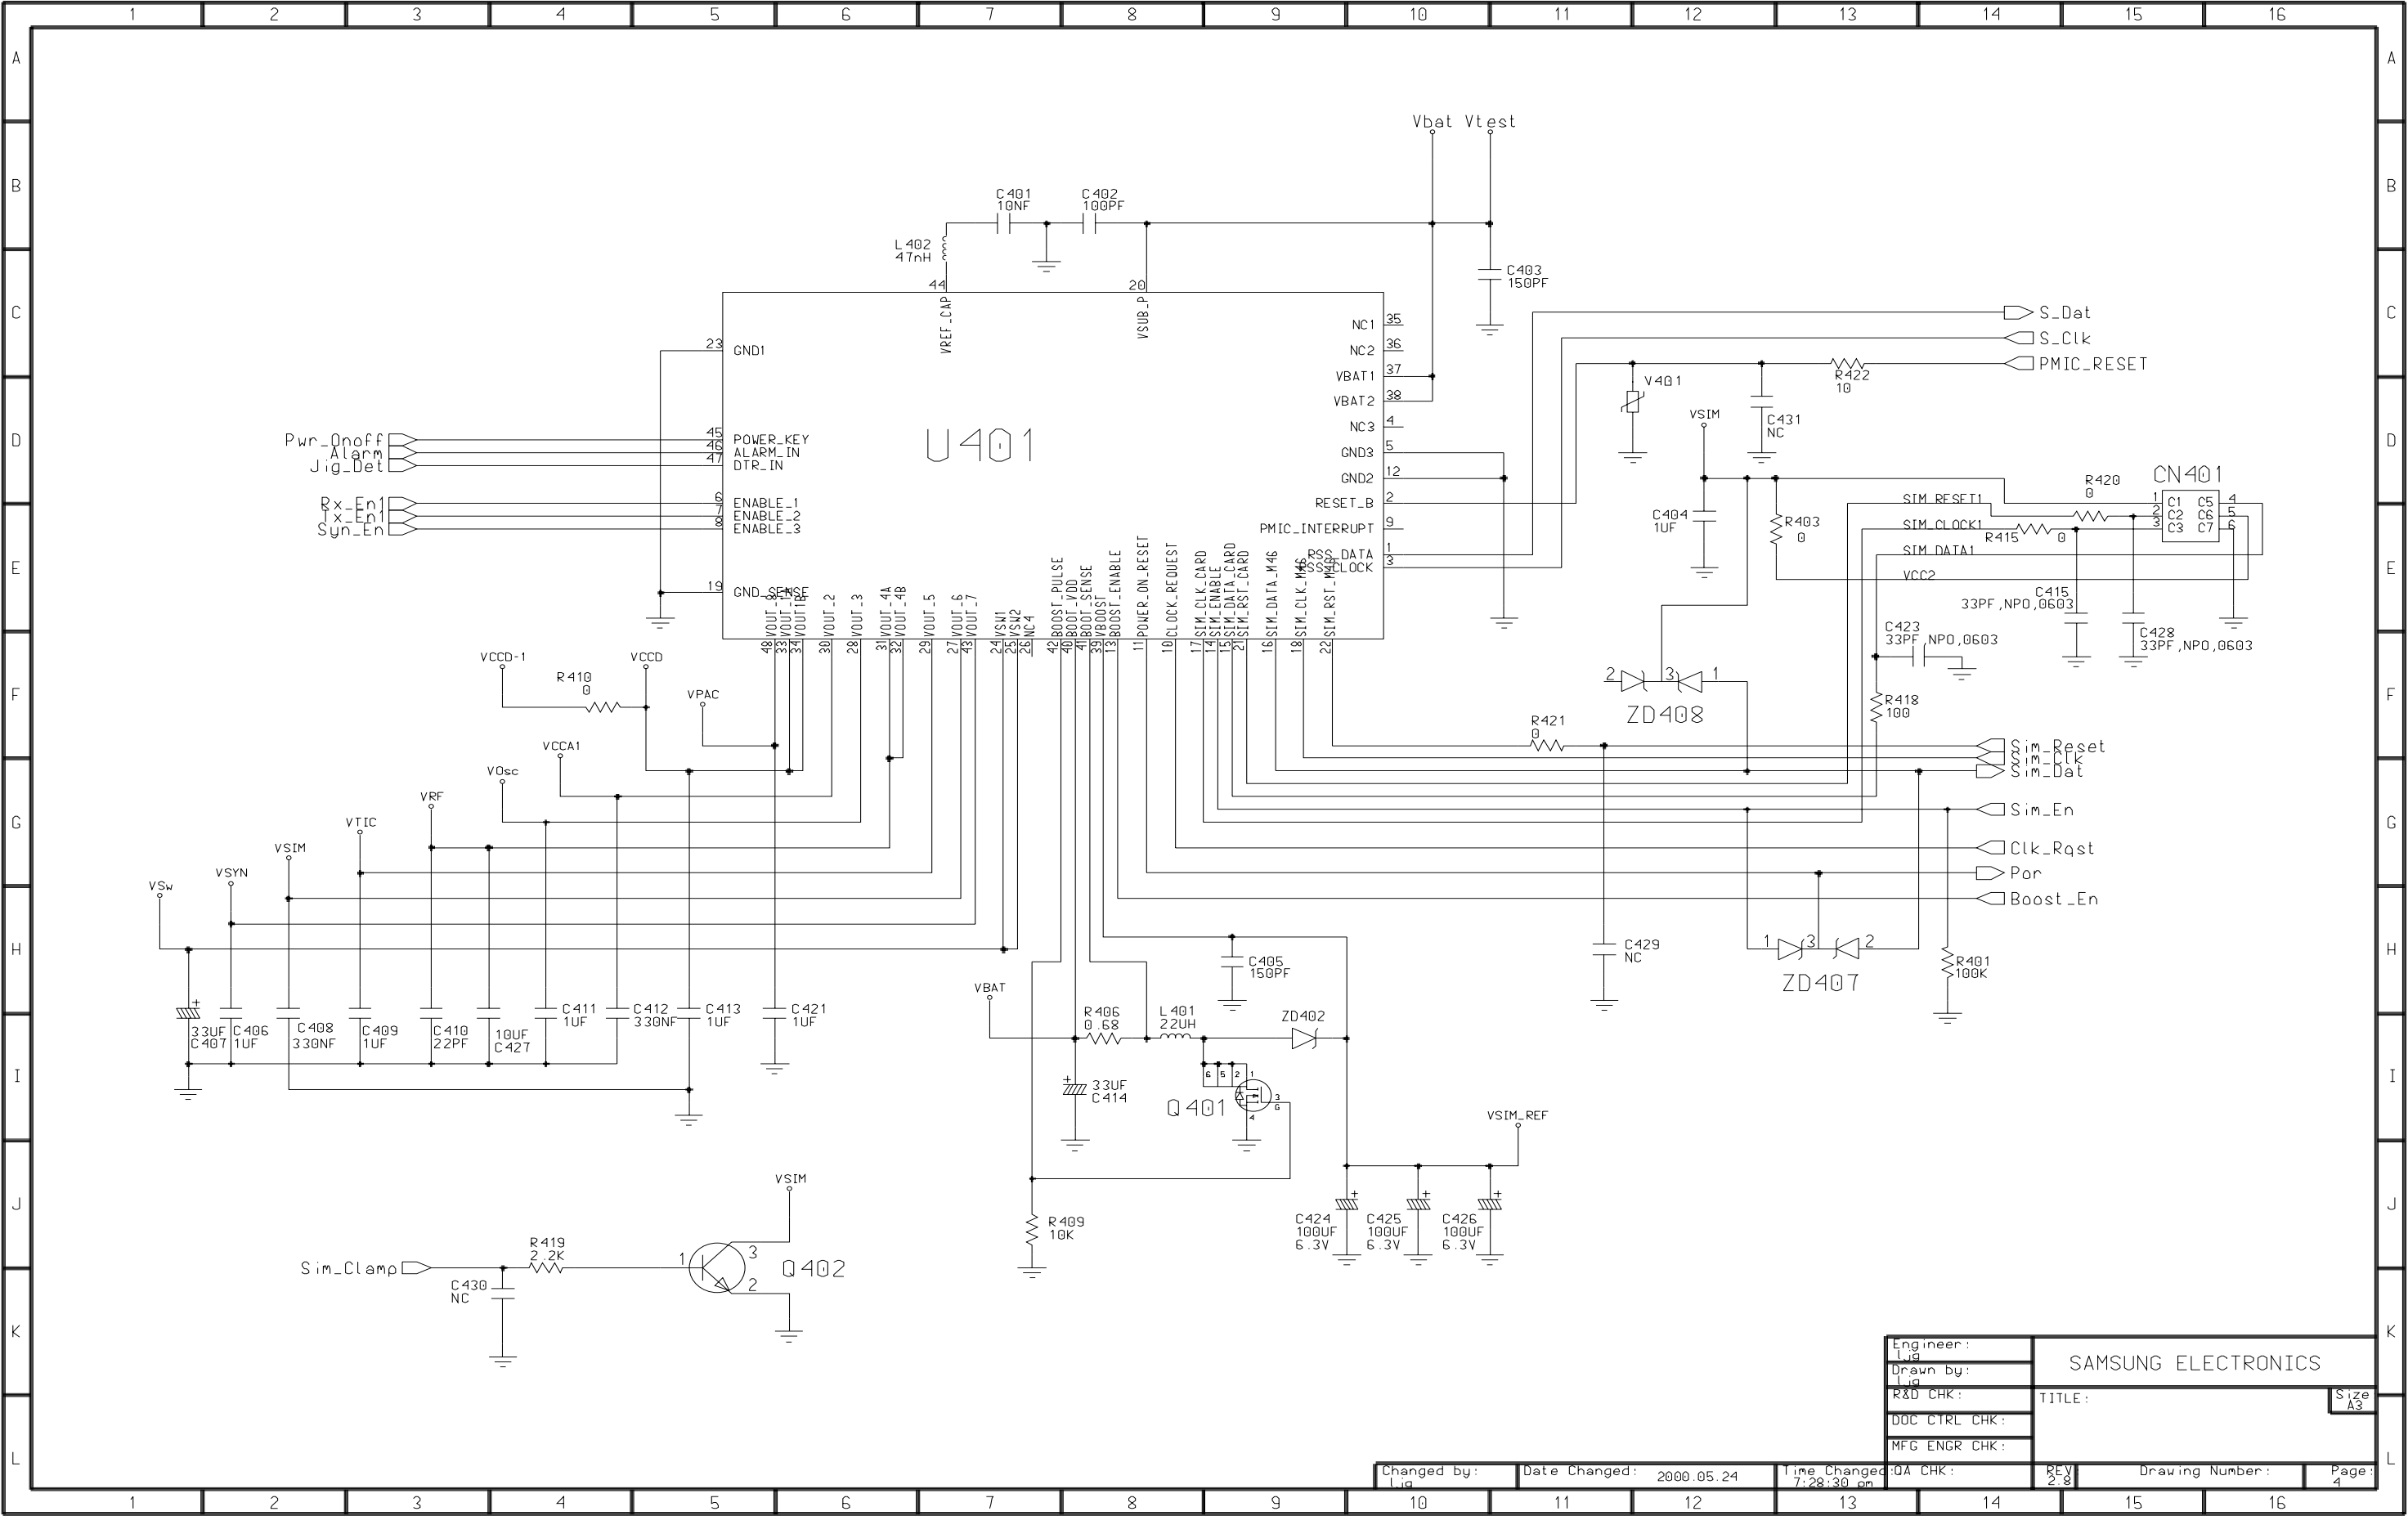

5-7 SGH-M100 Receiver FrontEnd Circuit Diagram Circuit Diagram

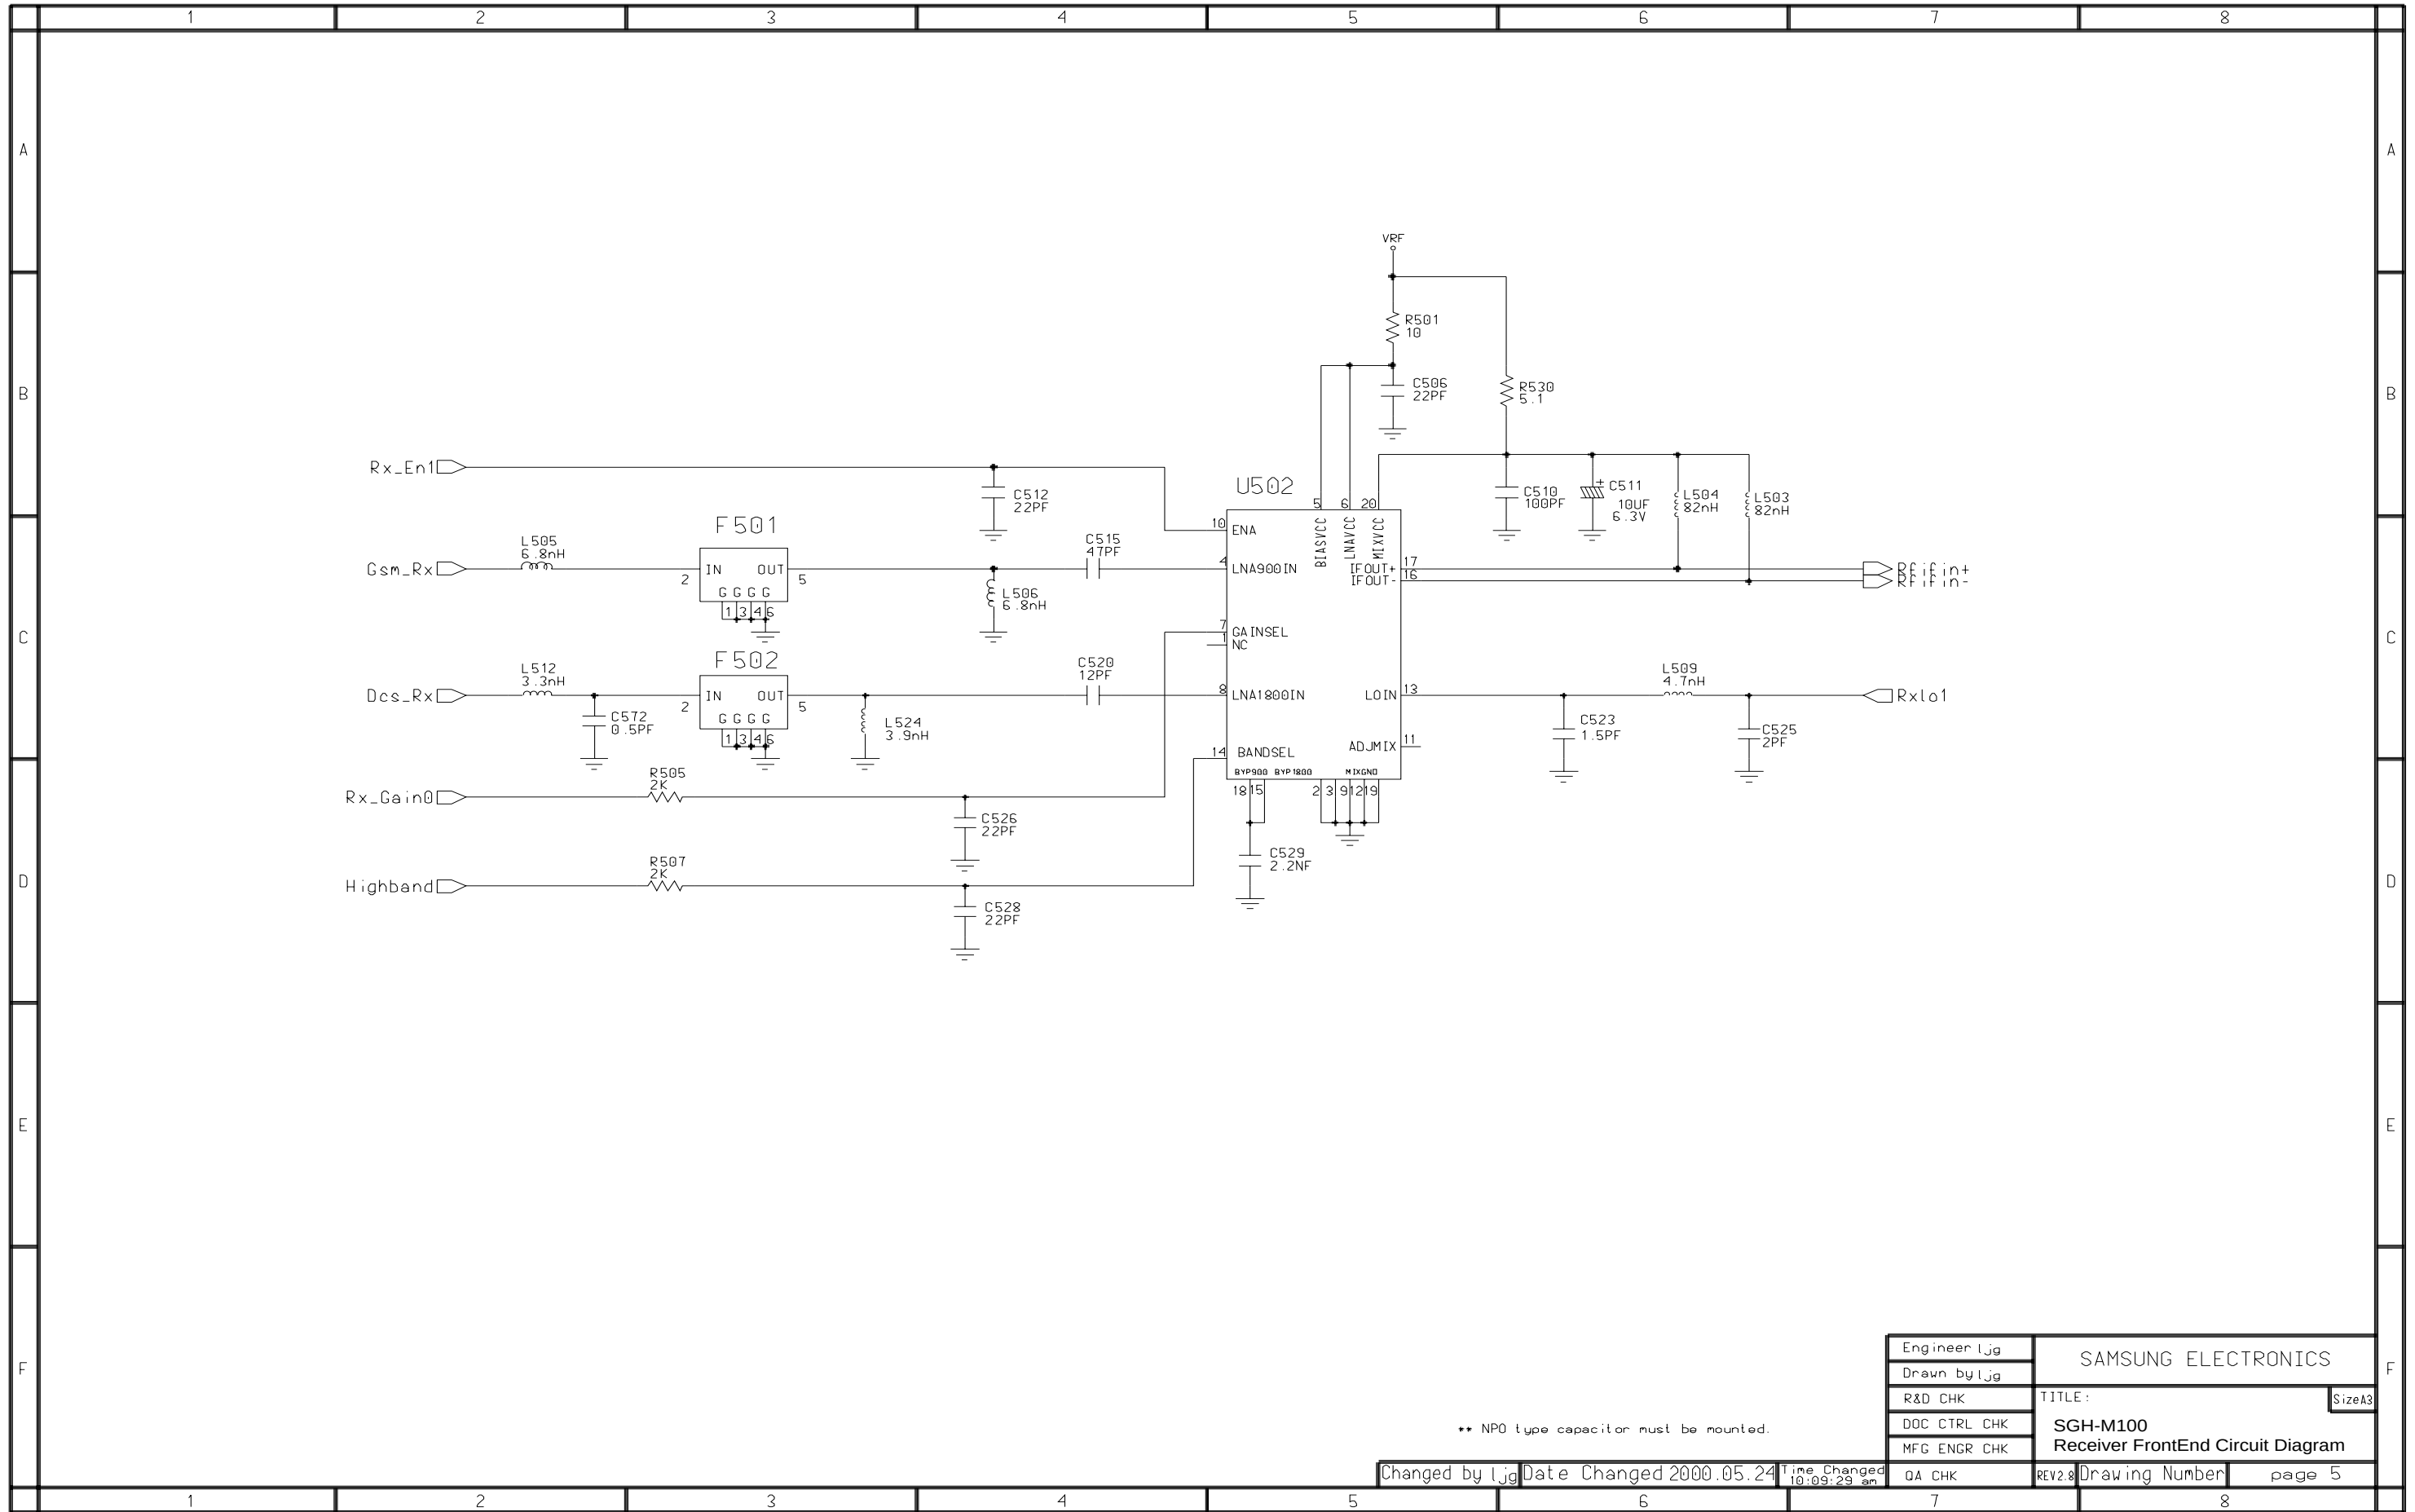


5-8 SGH-M100 Charger Circuit Diagram

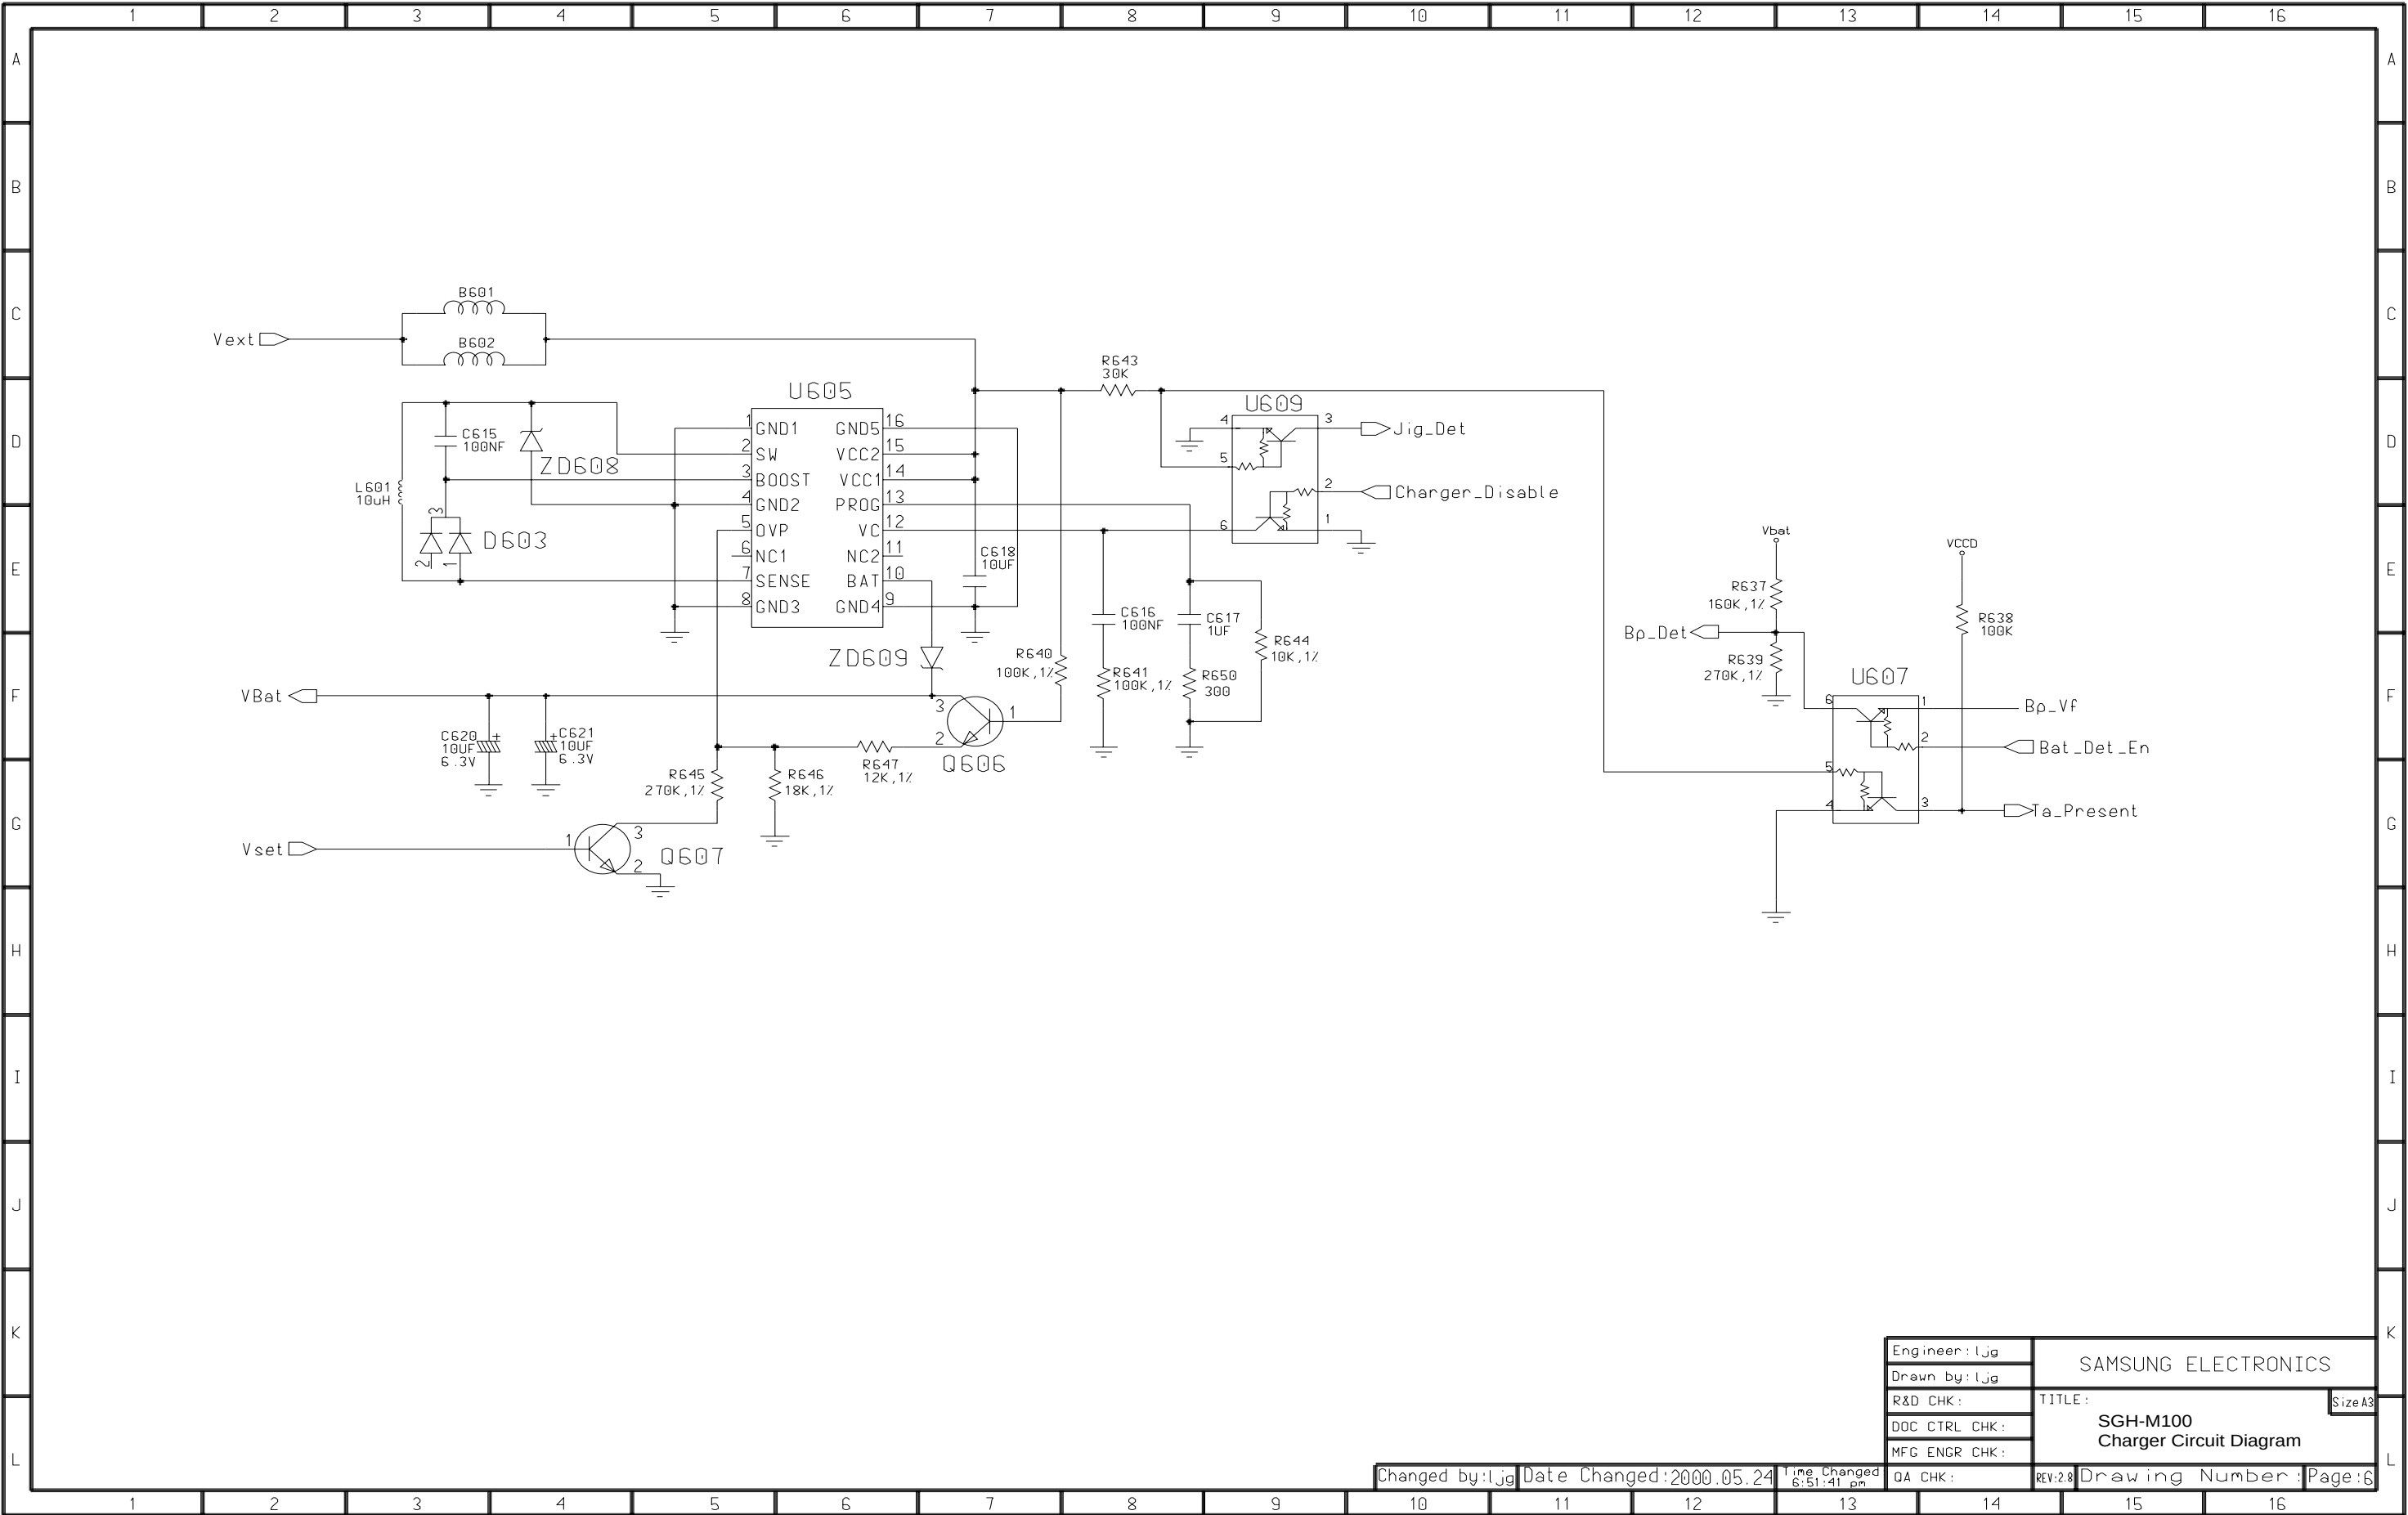



Samsung Electronics
5-9

5-10 SGH-M100 Audio Circuit Diagram

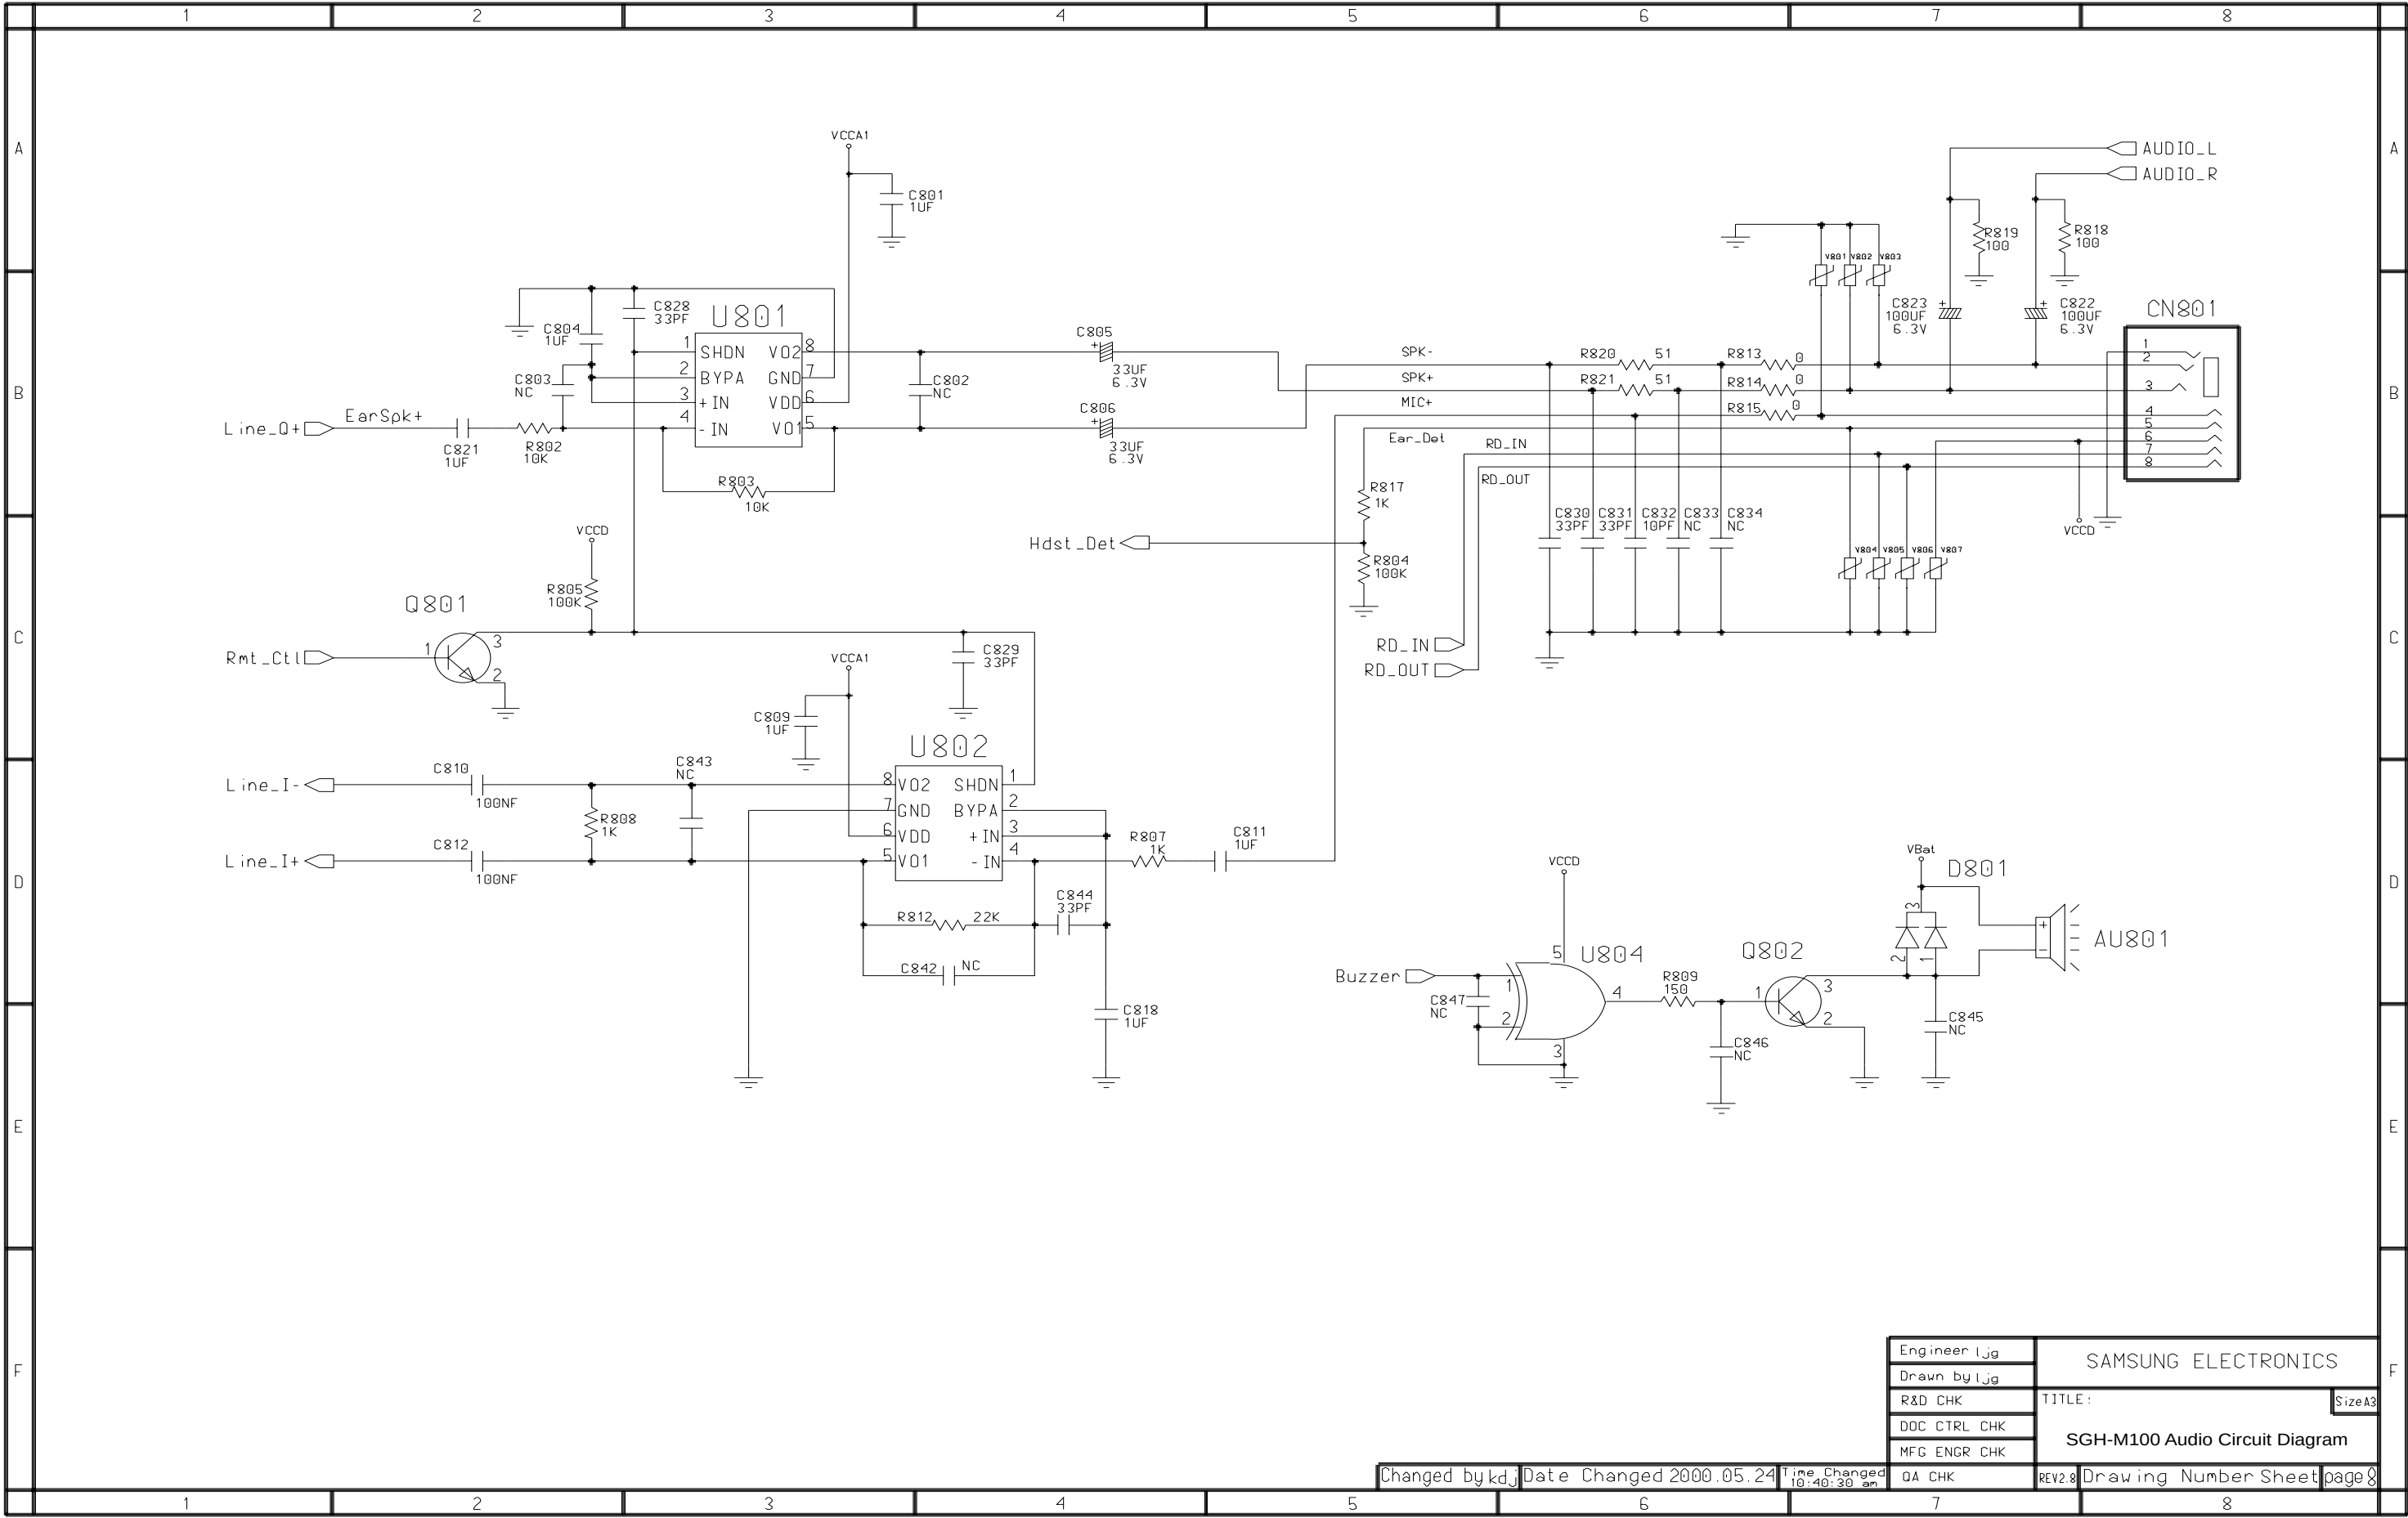

5-11 SGH-M100 Irda + Memory Circuit Diagram

